

Plant Pot Scale

Goal: Development of Wifi or BLE enabled scale to measure the weight of plant pots for an experiment of Anna-Lea.



Anna-Lea's Irrigation Experiment in the Greenhouse on Campus Kleve.

Weight Range Estimation

The intended pot size has $d = 20\text{ cm}$ diameter and a volume of $V = 7.5\text{ L}$.

The following rough estimate yields just design values for the expected dynamic range.

Maximum Mass: Saturated Sand

Assumptions (This worst case does not occur in practice, because the use of sand is not quite likely): Pot completely filled with sand, density of sand $\rho_s = 1.6\text{ kg/L}$, porosity $\eta = 40\%$ (depends strongly on compaction), pore space completely filled with water (density $\rho_w = 1\text{ kg/L}$). The total mass m is the sum of mass m_s of sand and m_w of water:

$$m = m_s + m_w = \rho_s \cdot V + \eta \cdot \rho_w \cdot V = (\rho_s + \eta \cdot \rho_w) \cdot V = (1.6 + 0.4 \cdot 1) \cdot 7.5\text{ L} = 15\text{ kg}.$$

Here the mass of the plastic pot itself is neglected!

Dry sand alone would have a mass of $m_s = \rho_s \cdot V = 12\text{ kg}$

Maximum mass of water under saturation: $m_w = \eta \cdot \rho_W \cdot V = 3, \text{kg}$

It follows:

$$1 \text{ vol} \cdot \widehat{=} \cdot 3000/40 \text{ g} = 75 \text{ g}.$$

For Sand			
Saturation %	Volumetric Water Content θ	Mass of Water m_w	Total Pot Filling Mass m
0%	0 vol	0 g	12000 g
100%	40 vol	3000 g	15000 g

Minimum Mass: Dry Potting Soil

Density of potting soil: $\rho_p = 0.5 \text{ kg/L}$

Mass of dry potting soil: $m_p = \rho_p \cdot V = 3.75 \text{ kg} = 3750 \text{ g}$

Design Values

Design dynamic range of the pot irrigation experiments: $3000 \text{ g} \leq m \leq 15000 \text{ g}$

The scale should be designed for 20 kg max weight (mass).

Futher Specs

Load Cell

Max mass of 20 kg , based on the dedicated HX711 24-bit ADC, e.g. from [Joy-IT](#), e.g. sold by [Reichelt](#)

According to the [datasheet](#) the accuracy is 0.02% of full scale (F.S.), i.e. $0.02\% \cdot 20 \text{ kg} = 2 \cdot 10^{-4} \cdot 20 \text{ kg} = 4 \cdot 10^{-3} \text{ kg} = 4 \text{ g}$.

This corresponds to a volumetric water content (sand example above) of $\Delta \theta \approx 1/20 \text{ vol}$. This is much more than needed in real experiments.

We would rather assume an experimental measurment error of at least(!) $1\% \text{ vol}$. The tree in the pot is growing, too, and changes the total mass measures by the scale!

MC

- Wifi or Bluetooth enabled microcontroller

Powerbank

- Battery driven, i.e. with USB power bank (5000 mAh)

PP Menu Bowl


Outer size: Breite 178 mm, Länge 227 mm, Höhe 49 mm


Usable inner size: Breite 157 mm, Länge 207 mm, Höhe 48 mm

<https://www.gastro Schreibwaren.de/eshop/info/menu-schale-pp-ungeteilt-schwarz-227-x-178-x-50-mm-50-st>



First Prototype

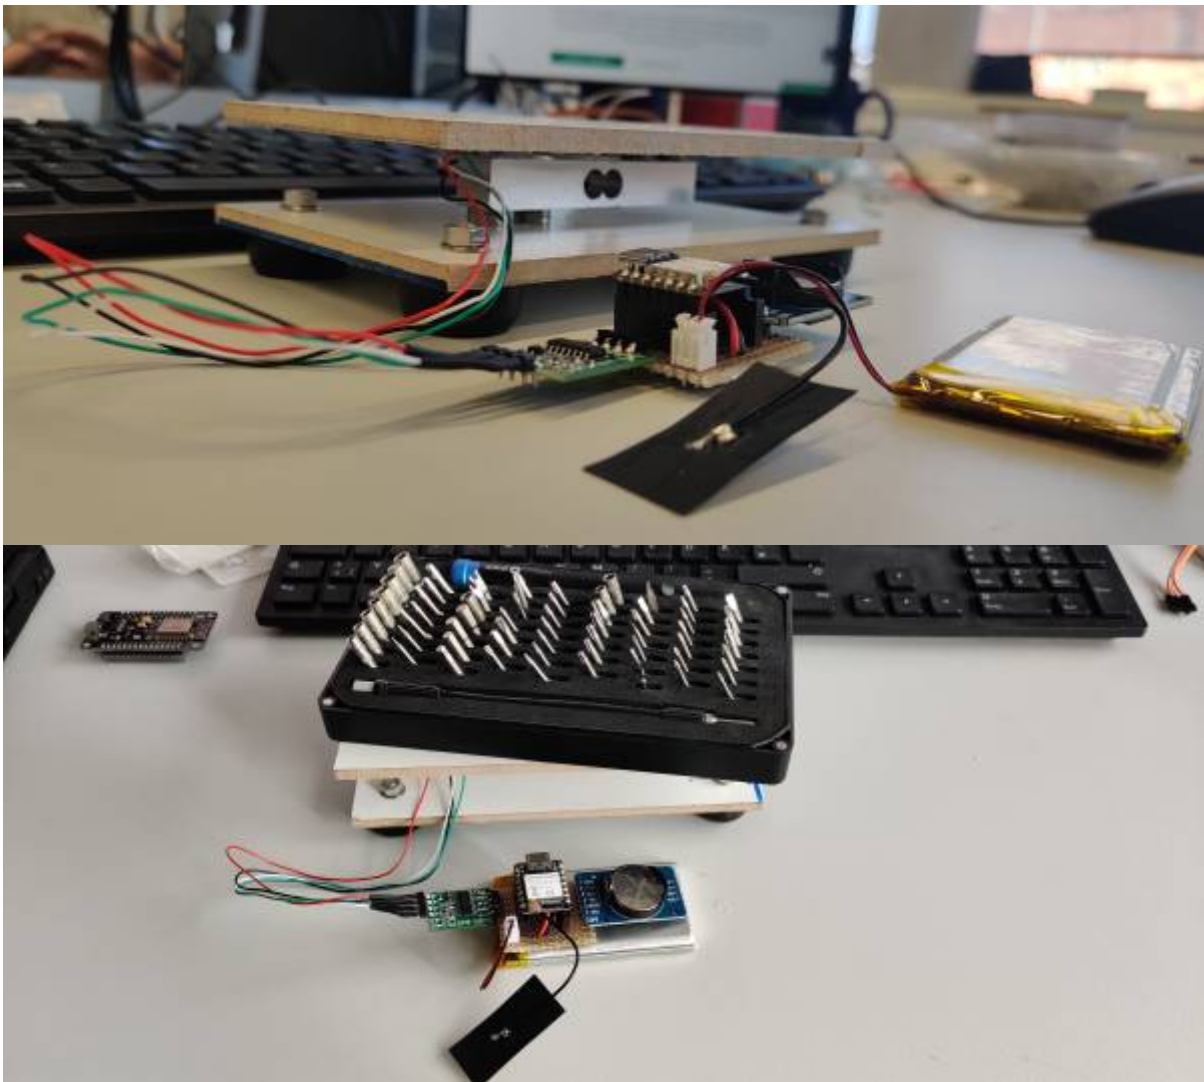

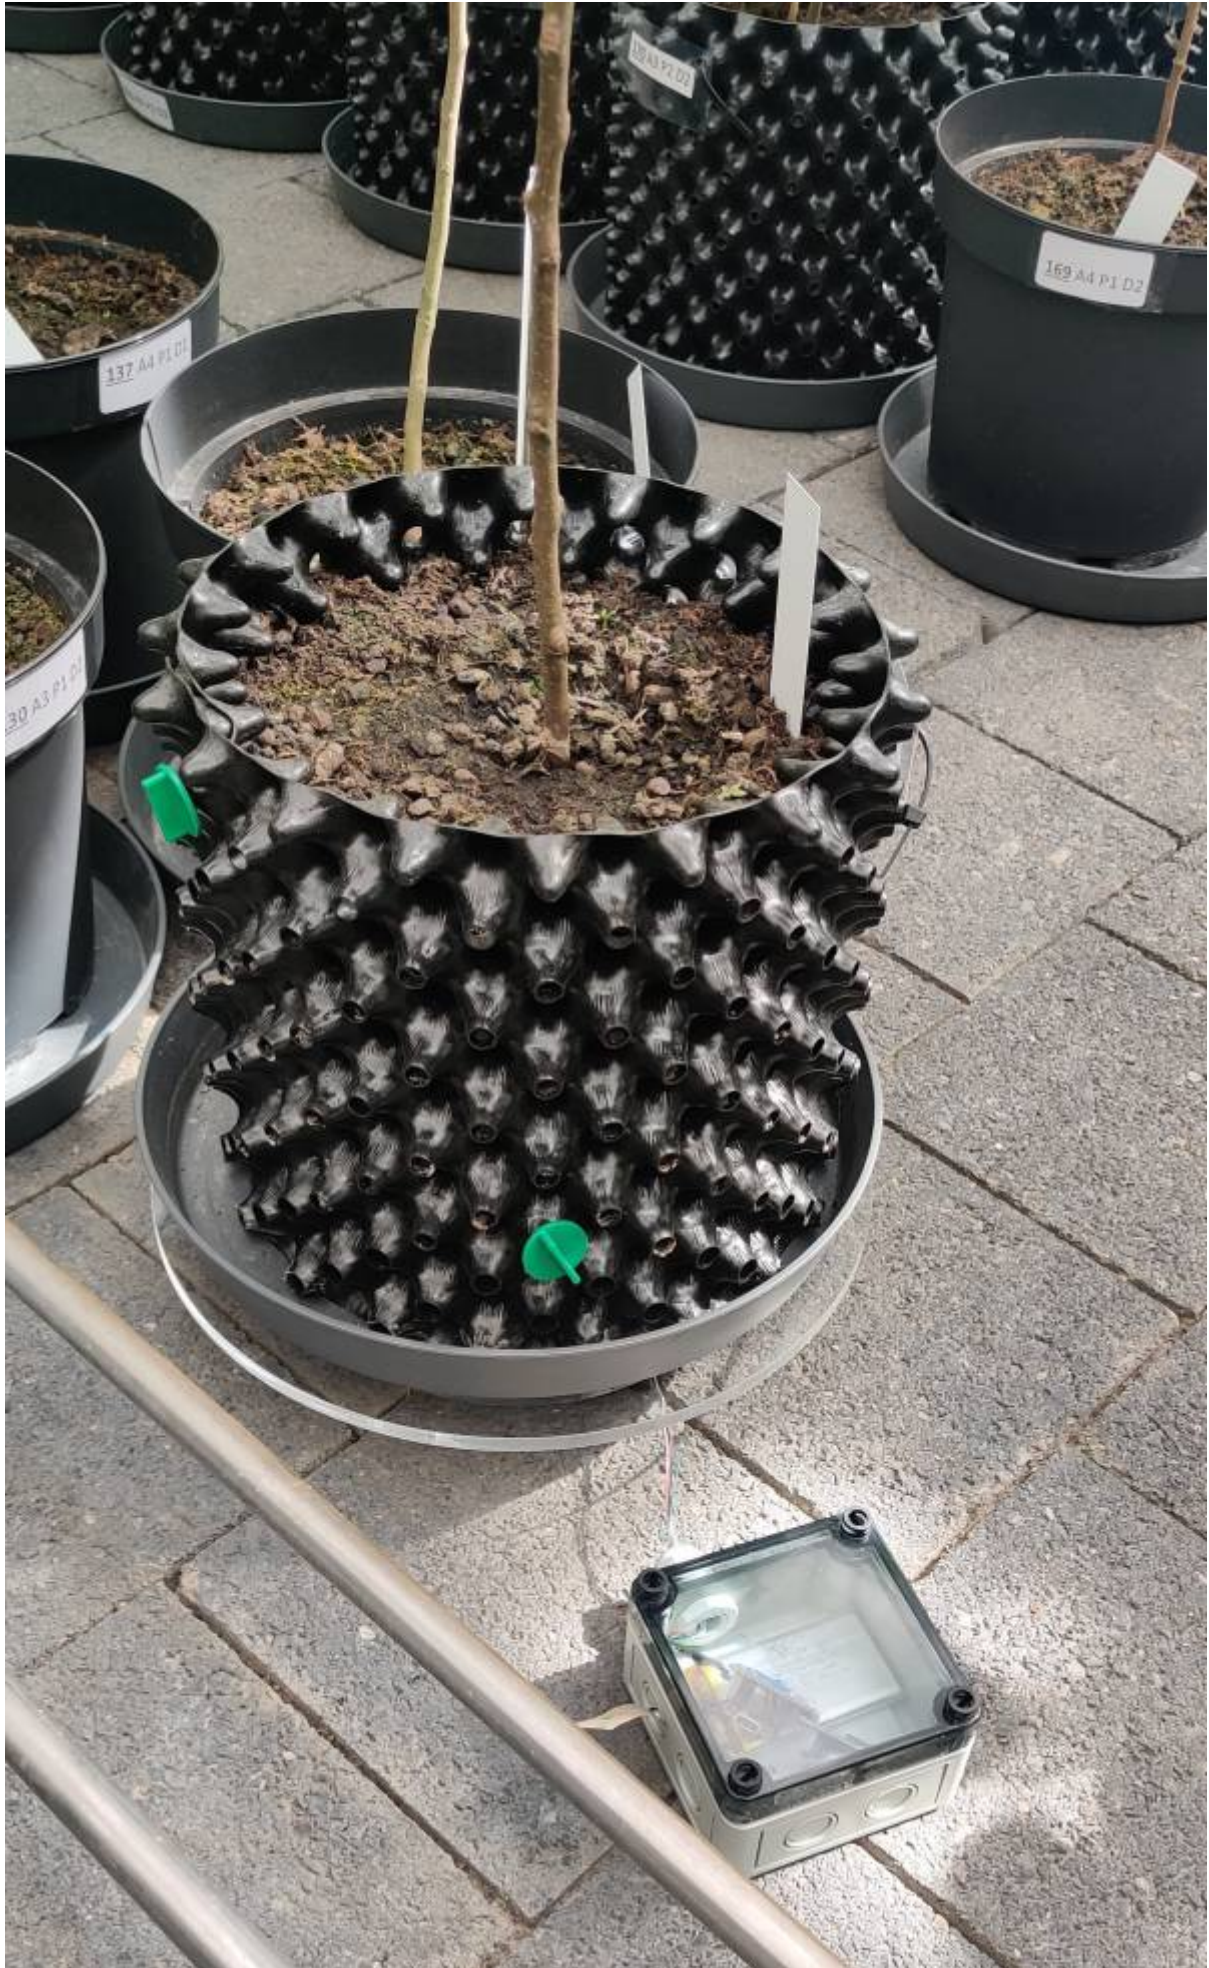

Hardware:

hardware	product page
ESP32S3	seedstudio
20kg load cell with hx711 adc	reichelt
ds3231 real time clock	makershop
2000 mAh LiPo-battery	eckstein

Operation


The first prototype is powered by a [Seeed Studio XIAO ESP32S3](#) microcontoller. It is chosen because of its low deepsleep current and its built-in lipo-charging controller. To keep track of time, a ds3231 real time clock is used. It is programmed to send an alarm to the microcontroller every full hour. Once the alarm is received, the ESP wakes up from its deepsleep state and tries to connect to a wifi network. It then synchronizes the time of the rtc with an ntp server, reads the hx711 adc and sends the measurement to an mqtt broker. From there the data goes to a node red server and is then saved in an influx database. After sending, the microcontroller goes back to its deepsleep state, until its interrupted by the rtc again.



Graph over a few days with varying weights

In our laboratory with a relative stable temperature the reading fluctuated by around 2 grams.

Hardware Setup

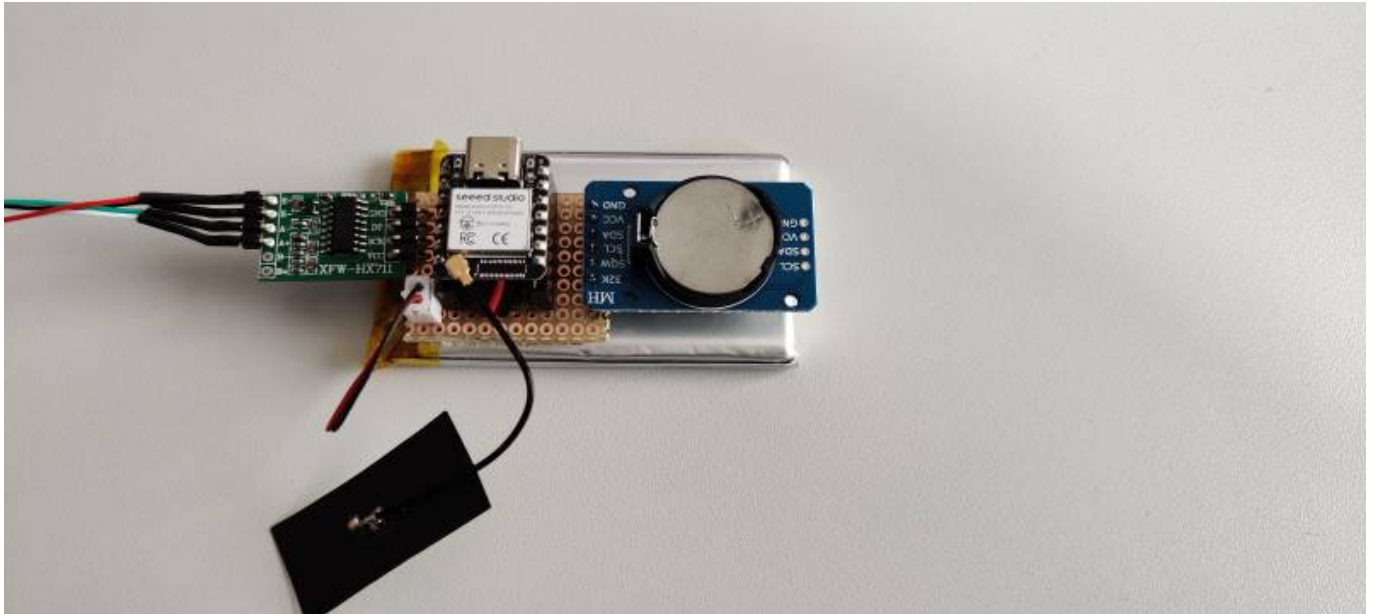


The electronics are mounted on a small piece of perfboard. The interrupt signal from the rtc needs to be pulled up while inactive. On the breakout that we used, the interrupt line is pulled to the main supply voltage of the board. In deepsleep we turn the supply voltage off to save power, so we have to cut a small trace to disconnect the resistor and use the internal pullup of the microcontroller.




Since the normal gpios of the esp32 lose their state in deepsleep, it is important to use one that is connected to internal rtc for the interrupt. The load cell has to be calibrated with a known weight.

Power Consumption

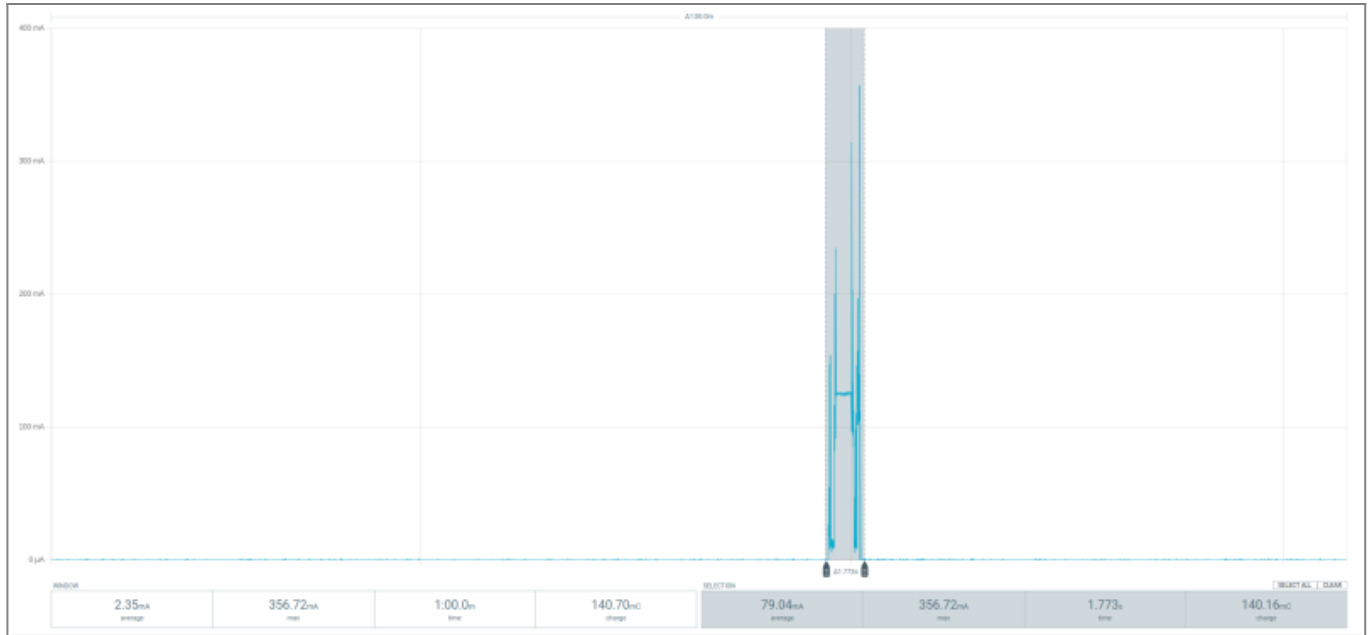

Current consumption while measuring and sending is around 80mA for 1.8 seconds

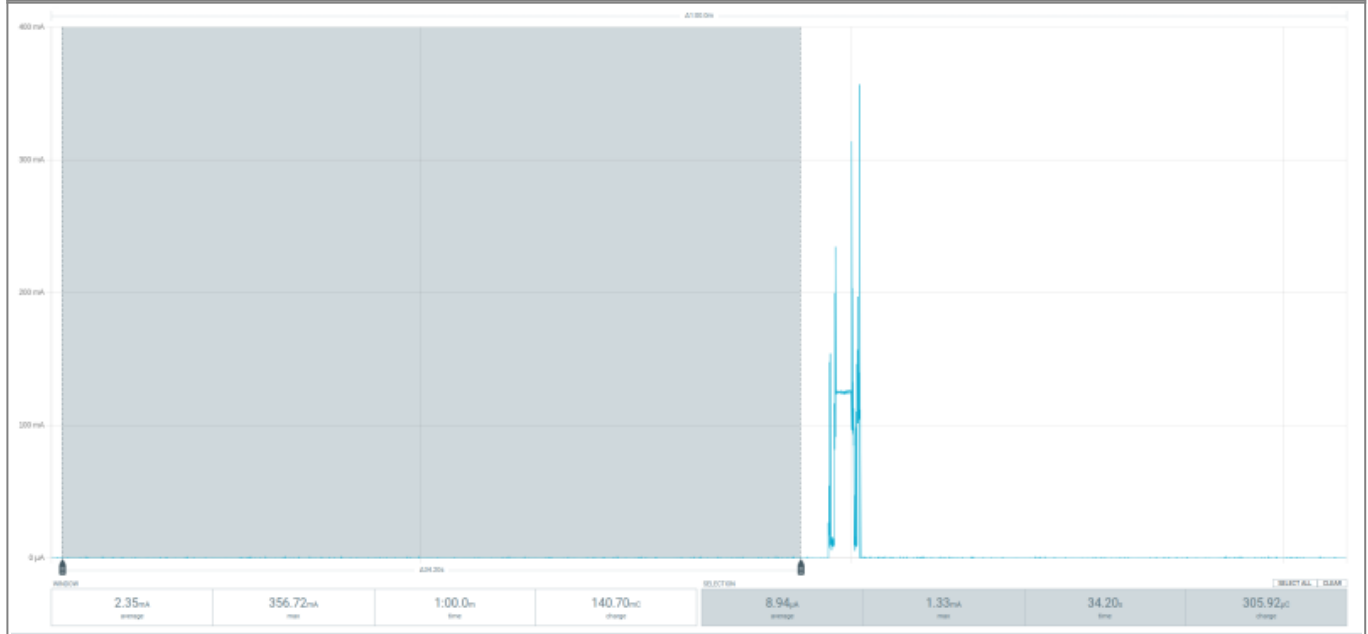

Current consumption while in deepsleep is around 9μA

Code

<https://github.com/hschoofs/loT-Scale>

[Dashboard](#)

Next Steps

- bigger and water-resistant plates for the scale
- small pcb (with battery monitoring) and water resistant case for the electronics
- clean up code

From:

<https://wiki.eolab.de/> - **HSRW EOLab Wiki**

Permanent link:

https://wiki.eolab.de/doku.php?id=eolab:products:plant_pot_scale

Last update: **2024/05/17 11:06**

