


UHF 6dBi Ceramic Antenna

CF-RA8080

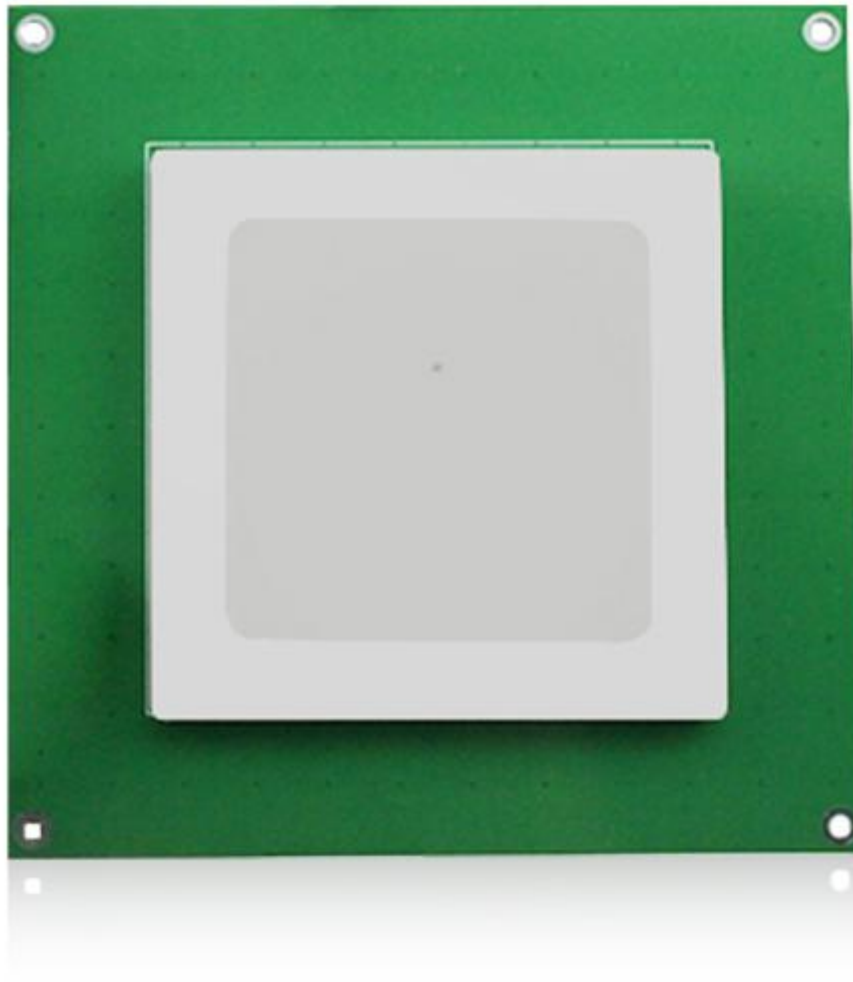



characteristic

- Integrated machine, standard 30cm feeder, RG316 brown high temperature resistant wire
 - Application: handheld terminal embedding, intelligent integration, smart retail, freezer management, asset management, document management and other scenarios
-

Product Specifications

RFID Parameters		Technical Parameters	
Frequency	868-868MHz (EU) 902~928MHz (US)	Bandwidth	20MHz
Gain	5dBi (Single feed)	Maximum power	10W
Rear connector model	30cm feed line	VSWR	≤ 1.1
Polarization	Circular polarization	Impedance	50 Ω
Physical parameters		Lightning protection	DC grounding
Ceramic size	80*80*5mm	Product List	
PCB size	120*120*1.5mm	Standard	Antenna*1
Weight	200g		

Details display

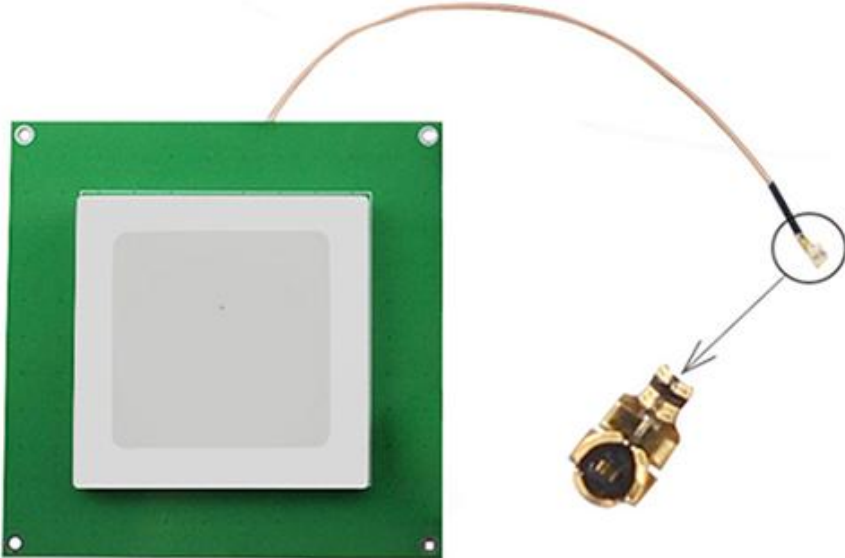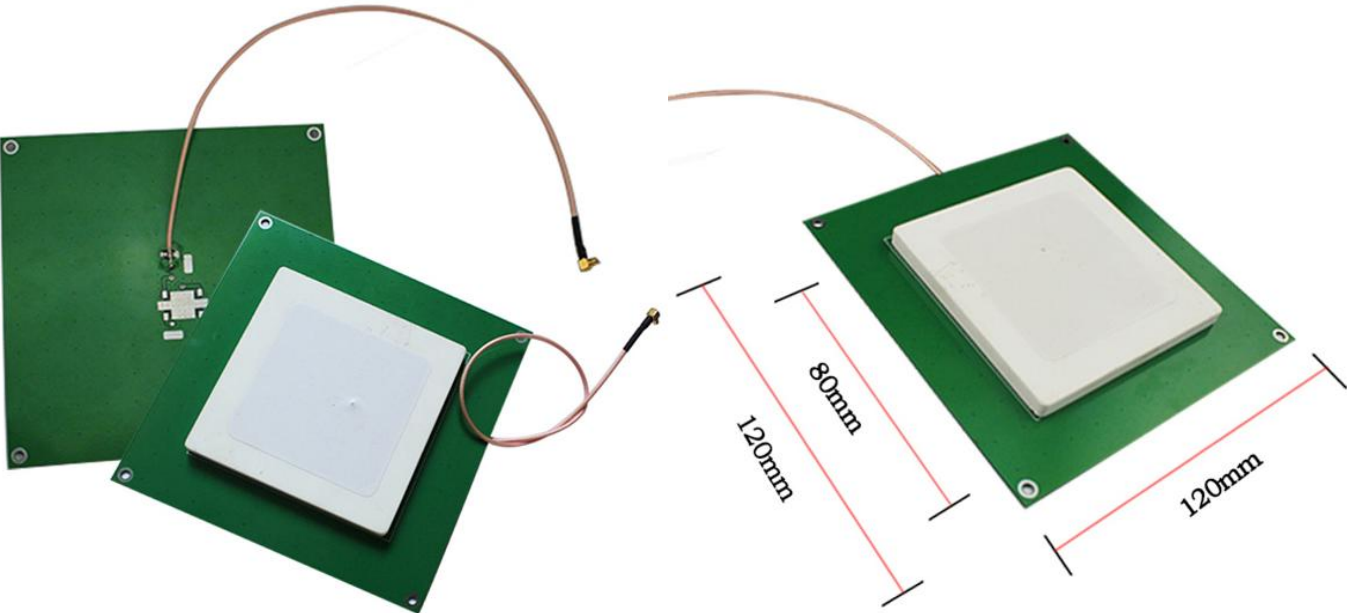




Optional feeder length and type



Feeder interface (optional)

RP-TNC male	RP-TNC female	TNC male	TNC female
SMA male	SMA female	RP-SMA male	RP-SMA female
MMCX male	MMCX female	IPEX male	IPEX female

Related Products

Image			
Model	CF-RA4040	CF-RA6161	CF-RA8080
Gain	3dBi	5dBi	6dBi
Polarization	Linear polarization/circular polarization		
Ceramic Size	40*40*4mm	60*60*7mm	80*80*5mm
PCB Size	50*50*1.5mm	70*70*1.5mm	120*120*1.5mm