OpenHyPE: OpenHygrisC Data Processing for Education

- Project funded by the Federal State of Northrhine-Westphalia (NRW)
- Funded by Ministerium für Landwirtschaft und Verbraucherschutz NRW (MLV)
- Project duration: 15.12.2021 30.06.2023

ZUSAMMENFASSUNG, EINLEITUNG UND ZIELE AUF DEUTSCH

0. Abstract

The State Agency for Nature, Environment and Consumer Protection (LANUV) of the federal state of North Rhine-Westphalia (NRW) provides extensive quantitative and qualitative groundwater monitoring data. This contributes to the fulfillment of the European Water Framework Directive as well as the EU INSPIRE Directive for an open interoperable spatial data infrastructure.

NRW operates its own water-related data portal **ELWAS-WEB**, which also provides the groundwater database **HygrisC**. ELWAS and HygrisC are not easy to use and provide only limited exploratory data analysis capabilities to the public.

However, the state publishes much of its groundwater data as an **open data archive** called **OpenHygrisC**, which contains several data tables in **csv format**. In particular, the **big data** in the measurement table, which contains all time series with **more than 3.6 million individual measurements** (table rows), and the table with the spatial coordinates of the groundwater monitoring wells require the use of a **spatially enabled object-relational database management system (Spatial ODBRMS)** and extensive **data engineering** before insertion into the database.

The goal of the **OpenHyPE project** is to develop a first set of **Open Educational Resources (OER)** to train the setup, filling and use of a **geospatial-temporal database** with the OpenHygrisC data. Due to the **graduated level of difficulty**, the project addresses **students** from **secondary schools** as well as **universities** in the state of North Rhine-Westphalia and beyond.

All software products used are **Free and Open Source Software (FOSS)**. The database, which we call **OpenHyPE DB**, is based on **PostgreSQL / PostGIS** and establishes the center of the system for environmental data analysis and presentation. The OER demonstates how the geographic information system **QGIS** as well as **Python programs** in the **JupyterLab development environment** interoperate with the OpenHyPE DB to select, analyze and display the data in the form of time dependent maps or time series. We use Python and Jupyter from the **Anaconda distribution**.

The start-up funding for the OpenHyPE project is used to raise awareness of the **NRW's valuable** open environmental data collection among young people as well as to contribute to interdisciplinary STEM promotion in general and education for sustainable development (ESD) in particular by linking environmental science and computer science.

1. Introduction

1.1 Problem Description

The state of North Rhine-Westphalia (NRW) operates comprehensive and professional measurement networks for the collection of environmental data through the LANUV. As part of Open.NRW and driven by the INSPIRE Directive of the European Union as well as other directives such as the EU Water Framework Directive (WFD), the state of NRW makes extensive data products openly accessible and freely usable on various platforms (Free and Open Data).

The state of NRW is a pioneer in Germany in providing open and (cost)free geodata. These data are a real treasure and form the basis for potentially massive knowledge gains in the field of environmental and nature conservation. Nevertheless, it seems that only a comparatively small group of people really uses this potential. Therefore, the OpenHyPE project has set itself the task of integrating this data stock into university teaching and developing corresponding freely accessible teaching material that can be used not only by students but also, to some extent, by pupils to learn the basics of environmental data processing. The start-up funding will be used to implement the first steps of developing such training material.

We follow the paradigm of "problem based learning": the necessary knowledge and skills are identified and taught based on a concrete socially relevant problem. The solution of the problem identified as significant is the motivation for learning.

At the beginning we want to develop the material on the basis of the problem area "groundwater protection". The Ministry for Environment, Agriculture, Nature and Consumer Protection NRW (MULNV) operates its own water-related data portal called ELWAS-WEB via the "Landesbetrieb Information und Technik Nordrhein-Westfalen" (IT.NRW). Data from the statewide groundwater database HygrisC are also held in this portal. ELWAS and HygrisC offer limited exploratory data analysis capabilities to outsiders. From the point of view of usability engineering, which deals with the user-friendliness of technical systems, improvements are desirable with regard to usability as well as data analysis possibilities, because exploratory data analysis and data mining in particular help to identify structures and relationships between data. ELWAS and HygrisC are therefore only suitable to a limited extent for teaching the basics of environmental data analysis, but they can be used in the classroom as supporting material.

On the portal OpenGeodata.NRW extensive data with spatial reference - also called geodata - are made available, which often have a time reference, such as land use changes or measurement data series on water quality. Excerpts of the HygrisC groundwater database of the state of NRW, published under the name OpenHygrisC, are also located there. These groundwater data can ideally serve as a basis for building one's own environmental database, which the learners can use to learn about concepts of data management and data analysis.

1.2 Project Goals

The following components are to be realized:

- Development of OpenHyPE geodatabase based on PostgreSQL/PostGIS to manage spatial and temporal data on groundwater quality and quantity.
- Problem-related free online course material (OER), tutorials, video tutorials, instructions,


program code,

using Free and Open Source Software (FOSS):

- Introduction to the State Agency for Nature, Environmental and Consumer Protection (LANUV).
- Introduction to groundwater protection
- $\circ~$ Introduction to the Geographic Information System QGIS
- $\circ\,$ Introduction to the relational database PostgreSQL and the query language SQL
- $\circ~$ Introduction to the geodatabase extension <code>PostGIS</code>
- $\circ\,$ Introduction to the processing of geodata with the programming language Python
- $\circ~$ Installation of the OpenHyPE database management system
- $\circ\,$ Discussion of the data model and upload of the OpenHygrisC data of the LANUV
- Automatic creation of diagrams on time series of water quality
- Automatic generation of groundwater chemistry maps
- $\circ\,$ Creating simple dashboards with interactive online graphs and maps
- Introduction to data mining (descriptive statistics, searching for correlations)

2. Implementation

2.1 Data Flow

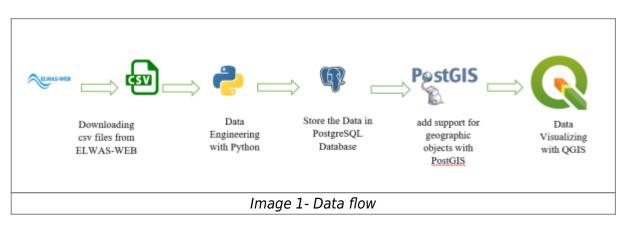

2.2 PostgreSQL/PostGIS

PostgreSQL is an open-source object-relational database management system (DBMS) known for its robustness, scalability, and extensive features. It is often referred to as "Postgres" and is one of the most popular and widely used databases in the world. PostgreSQL supports a wide range of data types, including numeric, text, Boolean, date/time, JSON, XML, and more. It provides support for complex queries, indexing, and advanced features such as full-text search, spatial data storage and querying, and transactional processing with ACID (Atomicity, Consistency, Isolation, Durability) properties.

PostgreSQL follows the SQL (Structured Query Language) standard, and it also provides additional features beyond the standard SQL specification. It supports stored procedures, triggers, and views, allowing developers to define custom business logic within the database itself.

PgAdmin is an open-source administration and development platform for PostgreSQL. It is a graphical user interface (GUI) tool that provides a convenient way to manage and interact with PostgreSQL databases.

PostGIS: PostGIS is an open-source spatial database extension for PostgreSQL. It adds support for geographic objects and spatial functions to the PostgreSQL database, enabling the storage, retrieval, and analysis of geospatial data. Geographic data such as points, lines, polygons, and multi-dimensional geometries can be stored and manipulated within your PostgreSQL database using PostGIS. The capabilities of the database are extended by PostGIS to handle spatial data types, indexing, and spatial operations. PostGIS has gained popularity in a variety of applications, including mapping, geolocation-based services, environmental analysis, urban planning, and transportation. Its combination with the power and versatility of PostgreSQL makes it a robust solution for managing and analyzing geospatial data in a relational database environment.

The below image shows the PGadmin tool.

	Dashboard Properties SGR, Ittalictics	Dependencies Dependents	
+ EServers (5)			-
+ Effalloax	Type	Pearme	Restriction
+ EPRal-part project MAD708	- Fale	"RETURN ON sinu-thist, proce	rormal
+ DF Kal-park project READER			
 EProdgootCL 13 			
+ U elver			
- 📅 Dutubopes (10)			
- The service			
> @Carts			
> @Catalogi			
 Covert Triggers 			
> Sizdenstora			
 mf Foreign Data Wampers 			
+ //SLanguages			
 WScherner (7) 			
► ⊕ pr			
 én hygnac 			
 epidile 			
~ + 100			
 B) Commons 			
 We Domains 			
D FTG Configurations			
 IN ITS Dictionaries 			
 Au FTS Passers 			
 IEFTS Temprates 			
Breadyn Tatlen Breadyn Tatlen Breadyn Tatlen			
 Waterland Variation 			
 Constants Constants 			
> 1.7Sequences			
- 20 falles (6)			
+ Impo, Matters			
+ minimag.ge			
+ Hit Autop_stoff			
+ mmazurements			
> messtele			
+ Emmessiwert			
> 10 Tripper Functions			
> 10 Tupes			
- 10 Yiews (7)			
Filmers, relativ, station, result			
+ Entrat			
- INVLGION			
		image 2- PGadmin	

Watching the below videos to understand how we can create schemas and tables in the PostgreSQL database.



Create a database and schema based on the above video.

2.3 Data Engineering

2.3.1 Downloading the data

In the first step, The data must be downloaded from here. To complete the process, download and extract the initial zip file, which contains four CSV files and one set of instructions. Refer to image 3 for guidance on selecting the appropriate zip file.

🛛 DRI 📕 Hares 📕 Cyber 🔅 English for invojna. 📳 Aranguaansent - E. 🔅 Ekblishanskapen.	- Unorbick für Stade-	BASS prime 🖬 Betranische Am	na.:-
		information und Hondrhain West	
OpenGeodata.NRW J Dryges:		(1 3	ion (* XML
Grundwassermessstellen NRW			
Linenterintermetion: Diese Dalen sistem unter der Datentitenz Deutschlans - Zero - Verale Datentalzbeschneitbung: 🔀 Operhyghist, meta zip Weisdeten im 🖾 Opernik XRW	an 2.8. Jack Nutzung ist ohr	e Sinschräckungen inder Bedingunge	et datiliseig
Daten der Grundwassermessstellen in NRW als CSV			
Daten der Grundwassermessstellen in NKW als CSV Detei		Letzte Änderung	Dateigröße
		Letzte Änderung 25-10.2021 09-48-00	Dateigroße 41.7 MB
Datel		and the second se	
Datal @Opentypted_gov-measuralise-mesowwris_EPS620002_CDV.pp		25-10-2021-00-48-00	41.7 MB
Detai Detai DenthypteC.gw-measurelen-messwerke_EPS62002_CDV.sp Ig OpenthypteC.gw-wesserstand_EPS62002_CDV.zp		25-10-2021-00-48-00	41.7 MB
Detail CopertHypteC.gw-mesadelee-mesoweris_EPISG28022_COV.zp CopertHypteC.gw-wasserstend_EPISG28022_COV.zp Daten der Grundwassermessabelien in NRW als Sqilte Datenbank		29-10-2021 08-46-00 29-10-2021 08-49-08	41.7 MB 100.4 MB
Detai CopertrypteC, gw-mesadelee-mesoweris, EPS520002, COV.zp CopertrypteC, gw-wassestand, EPS520002, COV.zp Daten der Grundwassermessabellen in NRW als Sollte Datenbank Detai		28-10.2021 08-48-00 29-10.2021 08-49-06 Letzte Änderung	41.7 MB 100.4 MB Defetgroffe
Detai CopertHypteC_gw-mesadelee-mesoweris_EPES22602_COV.zp CopertHypteC_gw-mesadelee-mesoweris_EPES22602_COV.zp Daten der Grundwassermessstellen in NRW als Sqille Datenbank Detai CopertHypteC_gw-messstellen-mesowere_EPES226832_Sqite.zp		28:10.2021 08:48:00 28:10.2021 08:49:00 Lettle Antisrung 28:10.2021 09:46:20	41.7 MB 100.4 MB Detelgrolle 88.9 MB
Datal C OpenthypteC _gw-messatellee-messwerke _EPS622002CDV.zp C OpenthypteC _gw-messatellee-messwerke _EPS622002_CDV.zp Daten der Grundwassermessatellen in NRW als Sqilte Datenbank Datal OpenthypteC _gw-messatelee-messwerke _EPS6226832_Sqite.zp OpenthypteC _gw-messatelee-messwerke _EPS6226832_Sqite.zp OpenthypteC _gw-messatelee-messwerke _EPS6226832_Sqite.zp		28:10.2021 08:48:00 28:10.2021 08:49:00 Lettle Antisrung 28:10.2021 09:46:20	41.7 MB 100.4 MB Detelgrolle 88.9 MB

After the above zip file has been extracted, the four CSV files and the instruction file can be considered, with a strong recommendation to read the instruction file first.

2.3.2 Python

Python is a high-level, interpreted, and general-purpose programming language known for its simplicity and readability. It was created by Guido van Rossum and first released in 1991. Python emphasizes code readability and has a design philosophy that emphasizes clear, concise syntax, making it easier to write and understand code. Python is used in several ways such as:

- AI and machine learning
- Data analytics
- Data visualisation
- Programming applications

In this project, we have used Python for data engineering, data pre-processing, and data analysis. Jupyter Notebook is used in this project to write Python codes. The Jupyter Notebook is an opensource web application that data scientists can simply write the code for and make it easier to document. Simply, we can combine Python codes, text, images, comments, and the result of the codes on the same page. The below image shows how code, text, and the result of the code can be seen on a single page.

File	Edit	View II	rsert Cell	Kernel V	Vidgets	Help						Trunted	Python 3 O		
8	+ 3< 4	16 +	🔶 🕨 Run	C *	Markdo	wri Y									
		Read	the file		>	Text									
		Don't forg	et to add the "de	simiter", norm	al csv file	's delimit	er is "," but in c	ur case it's *;*	, so we need	to assign it.					
	To LEAD	de - ed	read realman	tation pfna	me, del	isiters'	beadana	infor')							
	tu laala			factor bine		THEFT.) incauer -	THUR Y			Python Code				
		df.head(coccas grina		Initer -	1 , neader -	tine y			Python Code				
	ont[20].	df.head(name	+32		gw_stockwerk		gemeinde_id	-		, beobachtung_w	vasserstand	-	
		df.head()	name		n32			gemeinde_id 05111000	-			vasserstand	٦.	
		df.head() messstelle_id 32505929	name	• 32 343064	n32 5578019	gw_stockwerk			gwhorizont_id NaN	gwhorizont		vasserstand	₽	
		df.head(sl_nr 0 67530) messstelle_id 32505929 10448746	name UWB-Ddorf 01285	•32 343064 292077	n32 5678019 5645349	gw_stockwerk 1.0	grundstueck	05111000	gwhorizont_id NaN S	gwhorizont NaN		vasserstand -	₽	6


2.3.3 Anaconda

Anaconda is an open-source distribution for python and R. It is used for data science, machine learning, deep learning, etc. With the availability of more than 300 libraries for data science, it becomes fairly optimal for any programmer to work on anaconda for data science Anaconda is used in this project. An environment on Anaconda has been created to install all the packages needed for this project.



Environment in Anaconda: A conda environment is a directory that contains a specific collection of conda packages that are used in the project.

How to create Conda environment: The below video shows how to create a Conda environment, how to activate it, how to install different packages on the environment and how to deactivate the environment.



Python packages: Python packages are collections of modules that provide additional functionality and tools to extend the capabilities of the Python programming language. Packages are typically distributed and installed using package managers such as pip (the default package manager for Python) or conda.

To get more details about conda environment, I highly recommend visiting the below webpage.

https://towardsdatascience.com/manage-your-python-virtual-environment-with-conda-a0d2934d5195

openhype environment: For this project, an "openhype" environment was created to install all the required packages. This environment ensures that all the necessary dependencies are properly installed and configured.

Several packages are related to data science but in this project, we have used the below packages. There are two ways to install the below packages:

install a package manually: In this way you need to install each package manually into openhype environment by the command prompt.

• **pandas:** Pandas is a popular open-source Python library for data manipulation and analysis. It provides easy-to-use data structures, such as DataFrame, Series, and Index, that are designed to handle structured data efficiently.

In this project, pandas was utilized to read the CSV files, clean the data, and perform data engineering tasks. To install Pandas, execute the following Python code within the openhype environment in the Anaconda prompt:

conda install pandas

• **sqlalchemy:** SQLAlchemy is a popular open-source SQL toolkit and Object-Relational Mapping (ORM) library for Python. It provides a set of high-level APIs that allow developers to interact with relational databases using Python code.

conda install sqlalchemy

• **psycopg2:** Psycopg2 is a PostgreSQL adapter for Python. It provides a Python interface for interacting with PostgreSQL databases, allowing developers to connect to a PostgreSQL database server, execute SQL queries, and perform database operations using Python code.

conda install psycopg2

• geopandas: Geopandas is an open-source Python library built on top of Pandas and other

geospatial libraries. It extends the capabilities of Pandas by adding support for geospatial data, enabling users to work with spatial data in a tabular format.

conda install --channel conda-forge geopandas


Certain packages require the specification of a channel for installation. This is why the above code includes the channel specification to ensure the correct installation.

• **jupyter notebook:** Jupyter Notebook is an open-source web-based interactive computing environment that allows users to create and share documents containing live code, visualizations, explanatory text, and more. It supports various programming languages, including Python, R, and Julia.

conda install jupyter notebook

To ensure the successful installation of all the aforementioned packages, it is crucial to install them within the openhype environment using the Anaconda prompt.

Load all the packages into the environment by a YAML file: To streamline the installation process for all the required packages in this project, it is recommended to create an environment named "Openhype" and load a YAML file containing the package specifications. The contents of the "openhype.yml" file, as shown in the image below, encompass all the necessary packages.

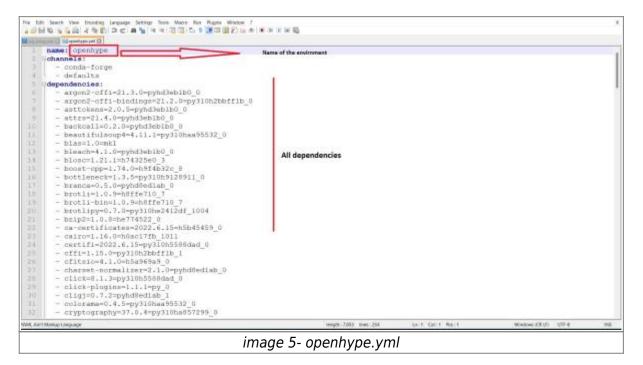

The following code allows you to create an environment based on the yml file. Keep in mind that the YAML file should be in the same directory as your Anaconda installation. If the file is located elsewhere, you will need to provide the full path to the file in the code. openhype.yml can be found from here

```
conda env create -f openhype.yml
```

How to create a yml file for the environment: With the below code you can export the yml file from the existing environment.

conda env export > openhype.yml

Since the four CSV files have been downloaded in the previous chapter, it is time to read the CSV files and initiate the cleaning process to make them ready for importation into our database.

Refer to the code section in our Notebook for more information Github (the below image).

Search or jump to	Pull requests issues Marketplace Ex	plare		a +• 🚱
E sina7272 / LANUV_Groundwater	(Rate)			🛇 Wei 🗢 Unwedde 1 + 🖤 👘 🔹 Stanned 1 +
⊖ Code _ () Issaes _ (), Pull requests	🔿 Actions 🛛 Projects 🗔 Wiki	© Security ⊨ Insights ⊕ Settings		
	Pinanis Pithanch Quings		Go to file Add file - Code -	About 0
	ena7272 update		attiči 2 heart apr (5) 22 commite	Ground water in NRW
	 Asynth, checkpoints 			C Readers
	Notebook			
	🖿 dita			
	a 999			Balaanan
	D glattributes			
	D README.and			
	READMEINS	vater		Packages No polagor published Packaly your feet publiqu
	Ground water in NRW			Languages
				Improve Resettioned \$11.75
30				
		image	6- Github	

There below four notebooks should be run separately, in order to import data into the database.

• import_gemeinde.ipynb:

In this notebook, we will import the data of all geminde into the database.

• import_katalog_stoff.ipynb:

In this notebook, we will import the data of all the catalogue substances into the database.

• import_messstelle.ipynb:

In this notebook, we will import the data of all stations into the database.

• import_messwert.ipynb:

In this notebook, we will import the data of all values into the database.

2.4 Observation Data in the Database

After successfully downloading, cleaning, and importing the data into the database in the previous section, it is now time to examine the data within the database. Since we are working with a PostgreSQL database, we can utilize SQL commands to retrieve and analyze the data. Let's run some basic SQL commands to gain insights into the data.

To view our tables, we can use the following code. It selects all the columns from the "hygrisc" schema, which contains our tables. We limit the output to the first 100 rows to avoid overwhelming results.

select * from hygrisc.messwert limit 100;

Image 7 illustrates the outcome of the aforementioned command executed in PGAdmin. It displays the resulting data obtained from the execution of the provided SQL command.

5 III 16 Q	Dashb	oard Pro	operties	SQL St	atistics Dep	endencies	Depen	dents	B etwais/olv	VASIER	elwas *										
> 🙊 Domains	8			Q ~	8 - 6	8 2'-	т		iolinit. 👒				- 5	15	đ٢	£	8 -				
 BFTS Configurations 	10 10	was/elwas	Selvas	w.							1000										
D) FTS Dictionaries	BLOOD BD	Editor Q																Scratch	Pad		_
A&FTS Parters FTS Templates																					
El Foreign Tables	1.5	elect .	from s	103.0835/	wert limit	100;															
> bit Functions																					
> Materialized Views																					
> U)Procedures																					
 4.1 Sequences 																					
 Tables (6) 																					
> mgw_stations																					
> 🖽 katalog_ge																					
> 🗄 katalog_stoff																					
 measurements measstelle 																					
> messache																					
> B) Trigger Functions																					
> C Types	Data O	atput Er	çolain 🔡	Messages	Notification	÷															
- 🔤 Vienes (7)	1	ster		ostelle_id	, siere ,	datum.pr	1.11	w.Ro	probengut	1	messergebnia_z		messe	gabnia,	hinweis	1	bestimmu	ngsgrenze	/ massesthet	/ trerewerfahr	
groupby_station_result	- A	[PK] bigint	, path	1	10.01		, p	94 F.	1994		double precision						comple the	clain		000	
	1.1	12289	9051	2090127	710 3/1992/16				L& Bhunderass			06.248							hand mg/l	Membranfit	
> 📴 ritrat									14 Grundwats	14		61.978	(n.f)						Just: mg/t	Membranfit	
🗢 🧱 nitrat_geom	7	12209			ariaeeric ore																
ritrat_geom Solumns	7 3	12289		803000	207 3/1093/16	1995-01-11			4 Grundwass	er		3 (1989							hom must	Membranfit	ber
 Initial_geom Initial_geom Initial_geom Initial_geom 			8072	803000		1995-01-11		12				3 10989 215777							hult mpt	Membrantik	
Initiat_geon Solumns Rulva Solumns Triggers	3	12289	8072 9077	803000	207 3/1093/16	1995-01-11		12	4 Grundwass	e	2		(null)						Contraction of the second second		her
 Initial_pecon B Columns Releas 3+ Trippers suffat 	3 4	12289	8972 8077 8079	803000 803000 803000	207 3/1093/16 303 3/1992/16	1993-01-11 1992-11-02 1993-12-22		12 12 12	14 Grundwass 14 Grundwass	e e	2.	25777	Indi Indi						her met	Menibrantik	her her
 Inituit, geom Bi Columns Ruleu \$ Triggers cultat cultat_geom 	3 4 5	12280 12280 12280	8972 8077 8079 8081	803000 803000 803000 803000	207 3/1093/16 303 3/1992/16 303 3/1992/16	1993-01-11 1992-11-02 1993-12-22 1992-04-21		12- 12- 12- 12-	14 Grundwass 14 Grundwass 14 Grundwass	e e	2 3 1	25777 05463	[lut] [nut]						Nem (fund Nem (fund	Menibrantik Menibrantik	her her tar
 Initial_pecon B Columns Releas 3+ Trippers suffat 	3 4 5 6	12289 12289 12289 12289 12289	8072 8077 8070 8081 8097	803000 803000 803000 803000 803000	207 3/1093/16 303 3/1992/16 303 3/1993/16 315 3/1092/16	1993-01-11 1992-11-02 1993-12-22 1993-04-21 1992-07-19		12 12 12 12 12	 Grundwass Grundwass Grundwass Grundwass 	8 8 8	2 3 1 10	25777 05463 1.0675	(101) (101) (101) (101)						Nem Sturk Nem Sturk Nem Sturk	Menibrantik Menibrantik Menibrantik	tter tter tter
 Initial_geoni Columni Rules Ingers cultur cultur cultur cultur margine 	3 4 5 6 7	12280 12290 12290 12290 12290	8572 8577 8570 8581 8597 8599	803900 803000 803000 803000 803000 803000	207 3/1093/16 303 3/1992/16 303 3/1992/16 303 3/1992/16 315 3/1092/16 364 3/1093/16	1993-01-11 1992-11-02 1993-12-22 1993-12-22 1992-04-21 1993-07-19 1992-05-10		12 13 12 12 12 12	 Grundwass Grundwass Grundwass Grundwass Grundwass Grundwass 	6 6 6 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7	2 3 1 10	25777 05403 1.0675 06.248	(1994) (1994) (1994) (1994) (1994)		J 81	-	hills out.		Nem Burl Nem Burl Nem Burl Nem Burl Nem Burl	Menibrantit Menibrantit Menibrantit Menibrantit	her her her
 Initial_geon B_Columni B_Pales S_Fitigers suffat suffat_geons suffat_geons turns turns turns 	3 4 5 6 7	12289 12289 12289 12289 12289 12289 12289	8572 8577 8570 8581 8597 8599	803900 803000 803000 803000 803000 803000	207 3/1093/16 303 3/1992/16 303 3/1992/16 303 3/1993/16 315 3/1092/16 388 3/1092/16	1993-01-11 1992-11-02 1993-12-22 1993-12-22 1992-04-21 1993-07-19 1992-05-10		12 13 12 12 12 12	 Grundwass Grundwass Grundwass Grundwass Grundwass Grundwass Grundwass 	6 6 6 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7	2 3 1 10	25777 05403 1.0675 06.248 53.124	(1994) (1994) (1994) (1994) (1994)		✓ Su	coss	hilly run. 1		Nem Burl Nem Burl Nem Burl Nem Burl Nem Burl	Menibrantin Menibrantin Menibrantin Menibrantin	tter tter tter tter

image 7- messwert table in databse

Now with the above SQL command, we are able to see the other three tables that we have (The below codes).

select * from hygrisc.messstelle limit 100;

select * from hygrisc.katalog_stoff limit 100;

select * from hygrisc.katalog_ge limit 100;

Now we want to see more details for our tables and we will run the below codes.

Count the rows of each table: With the below code, we can see how many rows we have in each table.

select count (*) from hygrisc.messwert;

select count (*) from hygrisc.messstelle;

Filter the data based on Nitrate only: To determine the substance number of Nitrate, we need to retrieve the corresponding information from the database.

select * from hygrisc.katalog_stoff where name like 'Ni%';

	B III B Q Datto	cont Properties SQL Statution Gep	endencies Dependents 🗿 eluas;/eluas/jeluas*		
 w partie 			8 2* T - home - 8 - 4 8 * 5 5 4	d+ A T+	
 		hem/them/phone +			
	March 199			125747012	
Reformers Beformers	Guery I	Editor Query History		Scritch Ped.	
+ ID FTS Dictionaries	1 5	select + from sine metalog_stoff a	teru name 14bg 'NVO'		
 Au FTS.Pwiers 					
• EFTS Templates					
 International Cathlers 					
 BitPunctions 					
 Material zed Value 					
 E'sProcedures 					
+ 1./Securitors					
- Tables (6)					
> III ox. stations					
+ Charleing ge	18				
> III katalog_stuff					
 III niessuramenta 					
· mirmanarialia					
+ III messivet					
 Bit Trigger Partotions 					
* 🕐 Types					
- 🔤 views (7)	Date O	whith Explain Messages Notification			
# groupby_station_result	1		- HI HING		
e vittat		nettur 🔒 hend ngre 🖷 hend 🔺 datab	efforg a tes.M a		
- nitrat_geom	1.1	1143 Non	1ull 7440451		
+ 🐚 Columna	1	1188 19CKel	WIT THERE		
+ mt Rolen	1	1244 titleat	INT NOT		
> 2+ Wiggers		1245 HitsenDrickstoff.	INC INC		
* wate peom		T248 benen	He has		
· tarra		1347 tem Stoken#	N N		
+ term2	1	1997 Numbershilter Tensteller	hel hel		
F @ tiper	1.1	2010 Newsbergel	bull 18402		
+ @ toper_deta		2146 Notaclea			
> (8) topology			[val] 1836-766		
+ mpostpies	-10	2501 10000 ressignment (MTA)	(vd) 185124		
 Internatialia, positions 		1768 Hisselfurin	Jul 111014.		
	-12	2814 fationethan	poll 76424		
 methodata 	15	4184 Nidesenit	Juli \$1457		
			INT 100244.		

According to the information presented in "Image 8," the substance number (stoff_nr) of Nitrate is **1244**

select * from hygrisc.messwert where stoff_nr = '1244';

Now we can filter the messwert table based on Nitrate. In this step, We can save this new table as a new "view".

What is a view: a view is a virtual table that is derived from one or more existing tables or other views. A view does not store data physically but rather provides a way to present data from underlying tables in a structured and organized manner. It acts as a predefined query that can be used to retrieve and manipulate data. The below code creates views:

```
create view hygrisc.nitrat as (select * from hygrisc.messwert where stoff_nr
= '1244');
```

We now have a "nitrat" view, which can be accessed just like a table using the following code. This view is filter of our messwert table based on "1244" which is "Nitrate"

select * from hygrisc.nitrat ;


Group by the two tables: the Group by clause is used to group rows based on one or more columns in a table. When working with two tables, you can perform a GROUP BY operation to group the data based on common values from both tables. In this section, we want to group by our two tables (messwert and messstelle) only in Nitrate. These two tables have a column **messstelle_id** which means station id.

```
select messstelle_id, count(*) from hygrisc.messwert where stoff_nr =
'1244' group by messstelle_id;
```

 State State 		8 · II	Q - # - 1	E 27 T * size + E F * 4 E * 5 5 4* 4 E*		
+ EL Collefierre	of stan	- contriguents	1			
+ 4 Domana		e Ouery History				Scritch Pad
+ DrTS Configurations	1 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4		at method	from sine.messwert where stoff, nr = '1244' group by messatelle_id		
 In FTS Dictionates 	a sere	er separation	(, 18), 0008E(*)	tion studingsmart might scont to a TT Broch sk wassagers"ig		
 Av FTS Parsers 						
 EFTS Templates 						
 W Foreign Tables 						
+ Wernstone						
+ 🎂 Infaherizitzent Views						
 Uprocedures Updagendes 						
- IETTables (0)						
 High stations 						
s Illivateros pe	11					
9 Ellicatalog_stoff						
 III measurements 						
 Ittracatalie 						
s III meanuet						
+ Big Trigger Functions						
+ 🐑 Турно						
- 🔛 Views (7)	Deta Output	t Esplan Ma	samps hotfor	973		
groupty_station_result		souther, if a laborate				
e entre reteret	4 10		aper a			
- vitat_prom	- L -	10101210	34			
 E Columna E Rules 		18290408	1.1.1			
+ 2+ Tiggen	1	18290411	28			
a suffat	- 4	(8200691)	39			
> multit geore		10200710				
> Temp	4	18280806	20			
+ 🛄 terrad	1	10200540				
 Hotiger 		10331036	-			
 Wittger_data 		18221917	0			
> (i) topology	10	10201242				
> To postgree.	11	(8201294	28			
 Stemplete_postgrs 	12	18281306	24			
> 📅 beerap	and the second second	18291312	-			
 Login/Urnap Rolet 	- 13				✓ Botce	eafully run. Total query runtime: 971 miles: 2632 rows affect
 Tablespices 	14	10201348	12			

Image 9 shows that each station id has how many single measurements for the Nitrate only. I highly recommend opening the below website to get more deep into how "group by" works and how we can use it.

https://www.w3schools.com/sql/sql_orderby.asp



Maximum date in nitrat table:

select * from hygrisc.nitrat where datum_pn = (select max(datum_pn) from hygrisc.nitrat); 2024/05/19 08:16

13/20

Admin File* Object* Tools* Help*		
	T % Q. Dathboard Properties SQL Institutes Dependencies Dependence @ environmencipitives."	
· · · · · · · · · · · · · · · · · · ·	8 16 16 - 10 0 - 10 - 10 E 10 - T - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 10 - 10 - 10 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10	
> \$3 Calations	S alman show with the second	
+ Rp Domains	Query Follow Query History Scratch Pad	
G) FT3 Configurations D) FT3 Districtance	1 select + from tins.nitrat where detam,pr + (select max(detam,pr) from sins.nitrat)	
AuliTS Parters Month To Templates		
Bit Poreign Tables		
 US Functions 		
Materialized Views		
 B. Proceduless 		
 + ± Elequencies Tableo (%) 		
> III wy, windows		
+ III Lafatog_ge		
+ mikatang_staff		
E THEADLEWINETED		
 Investorbeite Immerzuhent 		
> NO Trigger Functions		
> IC) Types		
~ 20 Yawa (7)	Outu Outur Explain Messages Inchtfodons	
A static for the static sta	star manufald paid damage and a second star and a second star and a second star a seco	6,60
+ thing geom		
+ Pr Columner	1 17721210 94191771 10221/11 1021-08-17 1044 Guadwissee 41 Gulf Juli 1941 Oceanigneist. Soos Aquee 4170002,5 2027	09-28
* THE Markets	The second se	
+ \$+ Triggers		
+ 🔤 nutat		
+ initial geom.		
+ Carterial2		
+ -Briger		
 Griger, data 		
 Gripping Spontees 		
 m postgred m teruptake_postgie 		
> Bitteenab		
 /bj.Login/Group Roles 		
> In Tatietaaret	D	_
	Image 10- Maximum of the date in the nitrat table	

As we can see in Image 10, the maximum date is 2021-08-17

Minimum date in nitrat table:

select * from hygrisc.nitrat where datum_pn = (select min(datum_pn) from hygrisc.nitrat);

6 B	🎹 📆 Q. Dashboard Properties 9QL Statistics Dependencies Dependencies 📓 elwas/shows/jalvas:*	
 so patient 	BBB-B-B-B-B-B-B-T- teles - BB+ BB+ BB+ B-B-B-B-B-B-B-B-B-B-B-B-B	
	gD leves/eleves/eleves	
> 4 Sortains	Dury Ellio Deep Hatory	Soutch Parl
 D-PTS Configurations 		3678601199
FTS Dictionaries	3 select + from wine, referre detum, pr = (select min(detum, pr) from wine, without);	
+ .#4 FTS Passelo		
 If TS Terrupiation 		
 III Foreign Tables Ibi Functions 		
 CEMaterialized Views 		
> \$1Procedures		
+ 1.3 Sequences		
- CTabres (E)		
 migw_stations 		
 Elivatarioj.ge. 		
Plots, pointai 111 4		
+ Himmesstern		
+ ITI messwert		
> 89 Trigger Functione		
 IC) Types 		
- 🗰 Vients (7)	Data Output Explain Messages Notifications	
+ poupio_stator_result	ally measured in the set of a	- a vertainen a not,ont a herkunit a alsoal,der
+ criter = criter, geom	A set of the set of th	- 164 - 164 - 164 - 245
> Brostanse	1 12274801 10210142 11931438 11224 Bushware 1AAM9 [ui] [ui] rapi Beampea	a juli www.jane.gomes.g
>		
* 3+ Trippers		
+ 🔛 mattat		
+ muttat.gieim		
+ therap		
+ Contract		
+ de tiper data		
 de topotogy 		
 Im pootgree 		
> 📅 template_postpis		
> stifthermap		
 - In Logm/Group Roles 		
 Tablespaces 		

As we can see in Image 11, the minimum date is 1951-04-30

Create geometry column in messstelle table: In this section, we want to create a geometry column from **e32** and **n32** columns from the messstelle table. With the below code, we are able to create a new column and we set the name as **geom**

```
ALTER TABLE hygrisc.messstelle ADD COLUMN geom geometry(Point, 25832);
UPDATE hygrisc.messstelle SET geom = ST_SetSRID(ST_MakePoint(e32, n32),
```

25832);

wsor 🖬 🖫 🐄	Q Dashbo	ard Properties	SQL Statistics De	pendenc	cies Dependents	was/elwas@elwas*							
> (@ public	8 9		Q - # - 6	8 1	2° T - 100	ni v 🖩 🕨 v	4		4- 1 E-				
✓ ③ sina	d2 etc	as/olwasgielwas	s v		STATISTICS.	and the second second second	-	and the second second	Contraction of the local division of the loc				
→ ┃↓ Collations	Discourse and	ditor Query His									cratch Pad		
 Image: Second sec			sina.messatelle							- 25	chalch Pag		
 (b), FTS Disclosures As FTS Parsées (c) FTS Templates (c) FTS Templates (c) Functions (c) Functions (c) Procedures (c) Procedures (c) Procedures (c) Exactions (c) Exactions 													
 > ES gw_stations > Es katalog_pe 													
> === kataliog_pe > === kataliog_stoff > === measurements			Messages Notification									1	
 Matalog_pe Matalog_stoff measurementa measurementa 		filterisenge_cm	a sumpfishrisings_cm		euebeuðurchmesser, mm. double avecision	Isatoriacher, ruhe, en double precision	10 <u>a</u>	ettbaulaange.cm double precision	oberkante, fitter, orr double precirion		unterkante, filter, om doctie precision		geon geonetry
b tataliog.pt b tataliog.pt b tataliog.stoff b measurements measurements measurement b measurement		filterisenge_cm double precision			double precision	Assoriactur, ruha, as double precision	no 🔒	actions buenoous	oberkante, filter, or double precision	but	double precision		geom geometry 0101000020E64
 > mi katalog_pe > mi katalog_stoff > measurementa > measutelle 	ster 🚔	filterisenge_cm double precision	sumpfrohrbenge_cm double precision	۵ (double precision	 double precision 		actions baccooca	one buone		double precision	but	geometry
Similar Statution (Second Statution)	ster 🛕	filterisenge.cm double precision	sumpfrahrlaunge.cm double precision	A (double precision	double precision	(h.f	1	(sel)	Ind	double precision	(huit) 93490	geometry
Similar Section 2	sber 🛕 Rimedia. I Padetti.	filterlaengecm double precision	sumpfishtiongs.cm double precision	a Juni Juni	double precision	double precision null 110	teri Neti		pull 2000)rul) 10345	double precision 	(hul)	geometry 0101000020EB64 0101000020EB64 0101000020EB64
 Extantion_pe Extantion_stoff Immeasurements Immeasurements<td>sber 🛕 Rimedia. I Padetti.</td><td>filterisenge, om double precision</td><td>sampfishrlaunge.cm double precision (null (null</td><td>a Jud Jud Jud</td><td>double precision</td><td>double precision null 110 null</td><td>jur jur jur</td><td></td><td>(m) 5000 (m) 00006 bacaroo</td><td>(rul) 10545 (rul)</td><td>double precision</td><td>(hul) 9349 (hul) 7505</td><td>geometry 0101000020E86- 0101000020E86- 0101000020E86- 0101000020E86-</td>	sber 🛕 Rimedia. I Padetti.	filterisenge, om double precision	sampfishrlaunge.cm double precision (null (null	a Jud Jud Jud	double precision	double precision null 110 null	jur jur jur		(m) 5000 (m) 00006 bacaroo	(rul) 10545 (rul)	double precision	(hul) 9349 (hul) 7505	geometry 0101000020E86- 0101000020E86- 0101000020E86- 0101000020E86-
Batalog_pe Batalog_pt Batalog_stmtH Immeasurements Immeasurements Immeasurement Workinger Functions Traper Working (7) Suppop_station_result Measurement Immeasurement Immeasur	Nimedia. I Padettu. I Delbru.	fiberisenge, cm double precision	sampfrohrleenge_cm double precision [ruli] [ruli] [ruli]	Burl Burl Burl Burl Burl	double precision	double precision null 118 null	turi turi turi turi	1 1 1	2000 [104] [104] [055	(nul) 10345 (nul) 7585	double precision	(hul) 9349 (hul) 7505 (hul)	georetry 0101000020E86- 0101000020E86- 0101000020E86-
Second Seco	siber A Rimedia. I Padetta, I Debru. Susterol,	fiberisenge, cm double precision	sampfrohleenge.cm double precision (null) (null) (null) (null)	Red Bed Bed Bed Bed Sed	double precision	double precision null 110 null null and	hoj hoj hoj hoj hoj hoj		10000 (10000) 10000 (0000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) 10000 (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (0000) (00	(nul) 10345 (nul) 7505 (nul)	double precision	(Hult) 9349 (Hult) 7505 (Hult) 3452	geometry 0101000020EB64 0101000020EB64 0101000020EB64 0101000020EB64 0101000020EB64
Set Natalog_pe Set Natalog_pe Set Natalog_stuff Metabog_stuff Metabog_stuffe Set messwert Workger Functions Compare Weaves (7) Set groupdp_station_result Metabog_station_result Set metast_pecen	siber A Rimedia. I Padetta, I Debru. Susterol,	fiberisenge, cm double precision	a samp frok/lawnga.cm (sub) (Burd Burd Burd Burd Burd Burd	double precision	double precision aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi aufi	koj koj koj koj koj		2000 (1000) 2000 (1000) 1000 (1000) 1000 (1000) 2000	(null 30345 (null) 7505 (null) 3455	double precision	(nul) 9349 (nul) 7505 (nul) 3452 3100	geometry 0101000020EB6- 0101000020EB6- 0101000020EB6- 0101000020EB6- 0101000020EB6- 0101000020EB6-

The "messstelle" table has been enhanced with an additional column called "geom," which contains the geometry information representing the location of each station.

Merge two tables:

In this section, we aim to merge the "messwert" and "messstelle" tables based on the common column, "messstelle_id." To achieve this, we will select the desired columns from each table and then perform the merge based on the "messstelle_id" column.

```
select t1."messstelle_id", t1."name", t1.geom, t2."stoff_nr",
t2."messergebnis_c", t2."masseinheit",
t2."datum_pn", t2."messergebnis_cm" from hygrisc.messstelle t1 ,
hygrisc.nitrat t2
where t1."messstelle_id" = t2."messstelle_id";
```

	Q, Dastooard Propert	we SQL Statebox Dep	ondersten Dependent	🖀 at mas, i at wass (bat mas, ii			
* @puble		E Q - # - &	8 B'- T -	10100 - 8 P		5.5 4-1	A 18-
··· @ sma	9 data bezaget	111-2					
 El Collatione 	Query Editor Query	and the second					Scortch Past
 Sg Dorwinn Di FTS Configurations 							
F By FTS Determines		waartelle_fd", t1."nee ". t2."wessergebrit.co				manuelchett",	
5 da FTS Painers		mantalls_Td" = t2,"man		form at a purchase	100		
 FTS Temphone 	and the second sec						
 El Fronkige Tables 							
k bis Paradiana							
b Distriction of the second							
F E Procestarea							
 t.idequerces 							
+ CTables (S)	1						
> 25 ge_skikork							
# Ittl: Katalog, ge							
* (***********************************	Data Gutant Explain	 Messages - Notifications 					
* Illineessiensetts	and the second s	Messages Notifications			1100000000	-	
	Data Output Explore messatalis.or	· · · · · · · · · · · · · · · · · · ·		iptetur e massaintet.	e terrar a	nassangadaria.com tact	
 ITTressurvements Ittressussible 	associate of	· · · · · · · · · · · · · · · · · · ·	a the second	rijesteritusi Linusiasian 🌢 Maamaalaskad. Linusi	 detersupri (sate 1800/0522 	nanongebrik, Jan Ind	•
 Internationality Internationality Internationality Internationality 	a tapet 1 2000	A test & geometry A			1000	1948	•
* 四1111000000000 * 四1111000000000 * 四1110000000000000000000000000000000000	1 2000 2 603	A test A geometry A		100.248 (mp)	1800-09-22		•
+ () researcements + () researce + () response + () regime Facultions + () regime Facultions + () regime () result + () regime ()	1 2000 2 603 5 603 5 603	A NUMB A SHORE A CONTRACTOR AND A CONTRA		100.245 reg/l 42.0809 reg/l	1800-09-22 1800-09-23		•
(1) These versions (1) These versions (1) These versions (1) These versions (1) Types (1) Verse (1)	**************************************	August - Googeney - Control Booleaney Control Booleaney Control Booleaney Control Booleaney Control Booleaney Control Booleaney		100.245 regit 40.0805 regit 31.0005 regit	1800-09-21 1800-09-21 1800-09-80 1894-09-10		•
+ II) measurements + III) measurements + III: measurement + III: Tragger Functione + III: Tragger Functione + III: Tragger - III: Where (T) - III: Wh	2000 C C C C C C C C C C C C C C C C C C	Lass	Hot Curr Hot Curr Hot Curr HIL 1344 Statil HIL 1344 Hot Curr HIL 1344 Hot Curr HIL 1344 Hot Curr HIL 1344 Hot Curr	100.240 regit 42.0000 regit 20.0000 regit 20.000 regit	1800-05-22 1800-05-23 1800-05-38 1804-05-01 1804-02-04		•
P (Traperusments P) Et resolution P) Et resolution P) Et resolution P) Traper V(Wens (T) P) Et resolution P) Traper V(Wens (T) P) Et resolution, result P) Et resolution, result P) Et resolution, result P) Et resolution P) Et resolution	mesodali, H 1 3000 2 803 8 803 3 903 5 903	A manual a generation of the second sec	Hold, or support Annotation strain Hold, or support 442. 12.84 12.84 442. 12.84 12.84 443. 12.84 12.84 443. 12.84 12.84	100.243 (mg/ 40.0000 (mg/ 20.0000 (mg/ 20.000 (mg/ 20.001 (mg/ 40.00 (mg/ 40.00 (mg/	1800-09-22 1800-09-23 1800-09-38 1800-02-02 1900-02-02		•
If measurements If measurements Encodeding	**************************************	A 1000 A 2000 A 20	HAVE TO SALE TOTAL NO. 1244 0243 NO. 1244 1244	100.245 mg/l 40.060 mg/l 38.0755 mg/l 44.27 mg/l 44.27 mg/l	1903-09-22 1902-09-38 1903-07-19 1903-07-15 1903-07-15	84 8 9 9 9 9 9 9 9 9	
P (Trequersands B) treasolds B) treasolds Constant	messatali, M 3 30/4 1 2000 2 001 3 000 5 003 5 003 6 001 7 2000 8 011	test	HOLE Table Bayer - Passe ALL 1344 All ALL 1344 All	100.243 mg/ 40.0005 mg/ 20.0005 mg/ 40.07 mg/ 40.07 mg/ 40.0045 mg/ 30.0014 mg/	1860-0932 1860-0932 1860-0942 1860-0944 1860-0945 1860-0915	84 8 9 9 9 9 9 9 9 9	Car. Total query rantition: 1 sects 480 more: 73899 issue affect

In order to have the above SQL command available as a new view for the subsequent section in QGIS, we should store it accordingly.

```
create view hygrisc.nitrat_geom as (select t1."messstelle_id", t1."name",
t1.geom, t2."stoff_nr", t2."messergebnis_c", t2."masseinheit",
t2."datum_pn", t2."messergebnis_cm" from hygrisc.messstelle t1 ,
hygrisc.nitrat t2
where t1."messstelle_id" = t2."messstelle_id")
```

2.5 QGIS

QGIS is an open-source and free application that can support viewing, editing and analysis of geospatial data.

You can download QGIS for free from the below link.

https://qgis.org/en/site/

The below video shows how to download and install QGIS for windows which are highly recommended to watch before installing it.



Now is the time to get to know about QGIS and the below video can help so much.




Create a time series video: In this section, we want to create a time series video to see how the nitrate concentration has been changed over time in North Rhine-Westphalia which is the most crowded state in Germany. First, we need to download the shapefile of the North Rhine-Westphalia state and load it into QGIS.

We will download three shapefiles,

- Whole state shapefile (dvg1bld_nw.shp)
- kreis shapefile (dvg1krs_nw.shp)

• Gemeinde shapefile (dvg1gem_nw.shp)


All the three shapefiles can be downloaded from here. After downloading, we need to load them to the QGIS to see them. The below video shows how to load the shapefile in QGIS.



Now we can see the map of NRW, kreis and Gemeinde. There are two options to create a video for time series.

Locally with shapefile: In here, we need to have a shapefile that consists of the nitrate concentration over time. download the notebook from here and run the python codes to create two shapefiles. then we should load these two shapefile to the QGIS. The first shapefile is consist of all stations in NRW and the second one is consist of the nitrate concentration.

The below video shows how we can load shapefiles to QGIS.



Connect to Database: The below video shows how we can connect our QGIS to Database and load the file.



3 Dashboard

This section will discuss how we can create an interactive dashboard for our data. An interactive dashboard is a tool that users can interrelate with data by analyzing, visualizing as well as monitoring the data.

Two approaches to creating a dashboard will be discussed in this section. The aim of this dashboard is a simple interactive dashboard in which users with no knowledge of programming can easily consider the data as well as a map. This kind of dashboard will help users to understand data better. Nowadays dashboards are widely used in several ways to help managers and decision-makers to make decision easier. one good example of such a kind of dashboard is the Covid-19 dashboard which each country also here in Germany people are widely used. The Covid-19 Dashboard aids people in noticing how many new cases and how many new deaths have been recorded in different periods of time.

In our case, we want to create a simple dashboard which shows the map of NRW as well as Nitrate and Sulfate concentration rates at different times.

3.1 Plotly Dash:

Plotly: Plotly is a computing company located in Montreal, Canada. They develop online data analytics and visualization tools. Plotly offers online graphing, analytics, and statistics tools for their users, as well as scientific graphing libraries for Python, R, MATLAB, Perl, Julia, Arduino, and REST. Plotly offers several open-source and enterprise products such as Dash which have been used for creating simple and interactive dashboards in this project.

Dash: Dash is a framework to build data apps rapidly not only in Python but also in R, Julia, and F#. According to Plotly official website, Dash is downloaded 800,000 times per month which shows that nowadays Dash getting more popular. Dash is a great framework for anyone who uses data with a customised user interface. Through a couple of simple patterns, Dash eliminated all of the technologies as well as protocols that are needed to make a full-stack web app with interactive data considerations. Another good feature is that Dash is running on web browsers so it means that no other application needs to run it.

If you would like to know more about Dashboard with Plotly Dash, click the link below. In the below link, you will find full tutorials about how to create a simple dashboard with Plotly Dash.

https://www.youtube.com/c/CharmingData

Dash is also offering some dashboards examples which could be really nice and helpful to get ideas. | Click here for Dash gallery


All the source codes of the dash gallery are available in | here

3.2 Panel:

4. Result


Nitrate concentration 2000-2010

The below video has shown the concentration of nitrate in NRW from 2000 to 2010. The video is created with QGIS 3.16

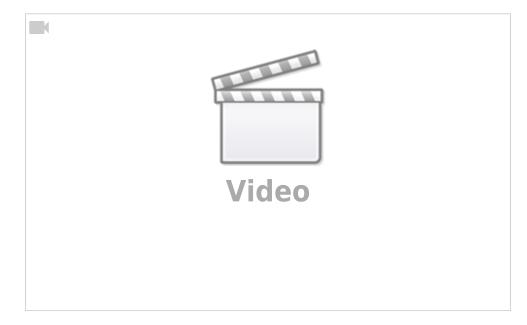


Nitrate concentration 2010-2020

The below video has shown the concentration of nitrate in NRW from 2010 to 2020. The video is created with QGIS 3.16

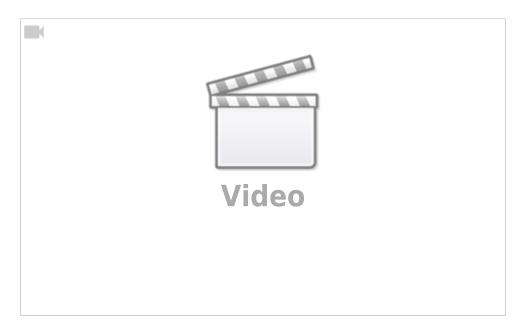


Sulfat concentration 2000-2010

The below video has shown the concentration of sulfate in NRW from 2000 to 2010. The video is created with QGIS 3.16

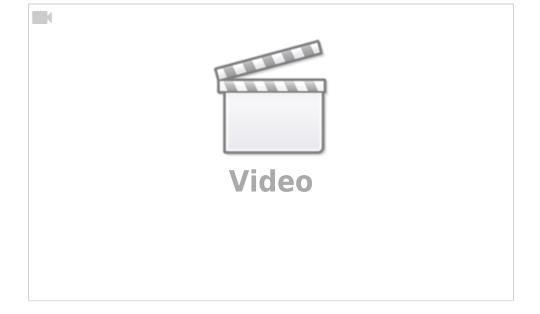

Sulfat concentration 2010-2020

The below video has shown the concentration of sulfate in NRW from 2010 to 2020. The video is created with QGIS 3.16

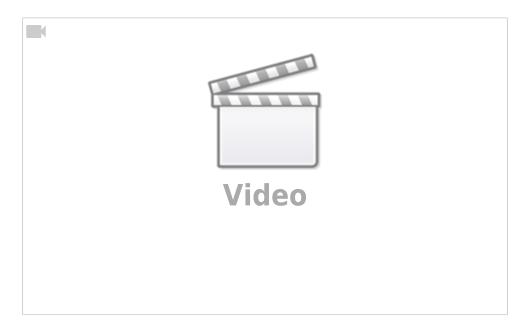

5. Project codes

All the codes are available in the below link.

Click here for project codes

Weitere Infos

• EOLab-Wiki-Seiten zum Thema Grundwasserdaten in NRW

From: https://wiki.eolab.de/ - HSRW EOLab Wiki

Permanent link: https://wiki.eolab.de/doku.php?id=eolab:openhype:start&rev=1684660865



Last update: 2023/05/21 11:21