OpenHyPE: OpenHygrisC Data Processing for Education

- Project funded by the Federal State of Northrhine-Westphalia (NRW)
- Funded by Ministerium für Landwirtschaft und Verbraucherschutz NRW (MLV)
- Project duration: 15.12.2021 30.06.2023

ZUSAMMENFASSUNG, EINLEITUNG UND ZIELE AUF DEUTSCH

0. Abstract

The State Agency for Nature, Environment and Consumer Protection (LANUV) of the federal state of North Rhine-Westphalia (NRW) provides extensive quantitative and qualitative groundwater monitoring data. This contributes to the fulfillment of the European Water Framework Directive as well as the EU INSPIRE Directive for an open interoperable spatial data infrastructure.

NRW operates its own water-related data portal **ELWAS-WEB**, which also provides the groundwater database **HygrisC**. ELWAS and HygrisC are not easy to use and provide only limited exploratory data analysis capabilities to the public.

However, the state publishes much of its groundwater data as an **open data archive** called **OpenHygrisC**, which contains several data tables in **csv format**. In particular, the **big data** in the measurement table, which contains all time series with **more than 3.6 million individual measurements** (table rows), and the table with the spatial coordinates of the groundwater monitoring wells require the use of a **spatially enabled object-relational database management system (Spatial ODBRMS)** and extensive **data engineering** before insertion into the database.

The goal of the **OpenHyPE project** is to develop a first set of **Open Educational Resources (OER)** to train the setup, filling and use of a **geospatial-temporal database** with the OpenHygrisC data. Due to the **graduated level of difficulty**, the project addresses **students** from **secondary schools** as well as **universities** in the state of North Rhine-Westphalia and beyond.

All software products used are **Free and Open Source Software (FOSS)**. The database, which we call **OpenHyPE DB**, is based on **PostgreSQL / PostGIS** and establishes the center of the system for environmental data analysis and presentation. The OER demonstates how the geographic information system **QGIS** as well as **Python programs** in the **JupyterLab development environment** interoperate with the OpenHyPE DB to select, analyze and display the data in the form of time dependent maps or time series. We use Python and Jupyter from the **Anaconda distribution**.

The start-up funding for the OpenHyPE project is used to raise awareness of the **NRW's valuable** open environmental data collection among young people as well as to contribute to interdisciplinary STEM promotion in general and education for sustainable development (ESD) in particular by linking environmental science and computer science.

1. Introduction

1.1 Problem Description

The state of North Rhine-Westphalia (NRW) operates comprehensive and professional measurement networks for the collection of environmental data through the LANUV. As part of Open.NRW and driven by the INSPIRE Directive of the European Union as well as other directives such as the EU Water Framework Directive (WFD), the state of NRW makes extensive data products openly accessible and freely usable on various platforms (Free and Open Data).

The state of NRW is a pioneer in Germany in providing open and (cost)free geodata. These data are a real treasure and form the basis for potentially massive knowledge gains in the field of environmental and nature conservation. Nevertheless, it seems that only a comparatively small group of people really uses this potential. Therefore, the OpenHyPE project has set itself the task of integrating this data stock into university teaching and developing corresponding freely accessible teaching material that can be used not only by students but also, to some extent, by pupils to learn the basics of environmental data processing. The start-up funding will be used to implement the first steps of developing such training material.

We follow the paradigm of "problem based learning": the necessary knowledge and skills are identified and taught based on a concrete socially relevant problem. The solution of the problem identified as significant is the motivation for learning.

At the beginning we want to develop the material on the basis of the problem area "groundwater protection". The Ministry for Environment, Agriculture, Nature and Consumer Protection NRW (MULNV) operates its own water-related data portal called ELWAS-WEB via the "Landesbetrieb Information und Technik Nordrhein-Westfalen" (IT.NRW). Data from the statewide groundwater database HygrisC are also held in this portal. ELWAS and HygrisC offer limited exploratory data analysis capabilities to outsiders. From the point of view of usability engineering, which deals with the user-friendliness of technical systems, improvements are desirable with regard to usability as well as data analysis possibilities, because exploratory data analysis and data mining in particular help to identify structures and relationships between data. ELWAS and HygrisC are therefore only suitable to a limited extent for teaching the basics of environmental data analysis, but they can be used in the classroom as supporting material.

On the portal OpenGeodata.NRW extensive data with spatial reference - also called geodata - are made available, which often have a time reference, such as land use changes or measurement data series on water quality. Excerpts of the HygrisC groundwater database of the state of NRW, published under the name OpenHygrisC, are also located there. These groundwater data can ideally serve as a basis for building one's own environmental database, which the learners can use to learn about concepts of data management and data analysis.

1.2 Project Goals

The following components are to be realized:

- Development of OpenHyPE geodatabase based on PostgreSQL/PostGIS to manage spatial and temporal data on groundwater quality and quantity.
- Problem-related free online course material (OER), tutorials, video tutorials, instructions,


program code,

using Free and Open Source Software (FOSS):

- Introduction to the State Agency for Nature, Environmental and Consumer Protection (LANUV).
- Introduction to groundwater protection
- $\circ~$ Introduction to the Geographic Information System QGIS
- $\circ\,$ Introduction to the relational database PostgreSQL and the query language SQL
- $\circ~$ Introduction to the geodatabase extension <code>PostGIS</code>
- $\circ\,$ Introduction to the processing of geodata with the programming language Python
- $\circ~$ Installation of the OpenHyPE database management system
- $\circ\,$ Discussion of the data model and upload of the OpenHygrisC data of the LANUV
- Automatic creation of diagrams on time series of water quality
- Automatic generation of groundwater chemistry maps
- $\circ\,$ Creating simple dashboards with interactive online graphs and maps
- Introduction to data mining (descriptive statistics, searching for correlations)

2. Implementation

2.1 Data Flow

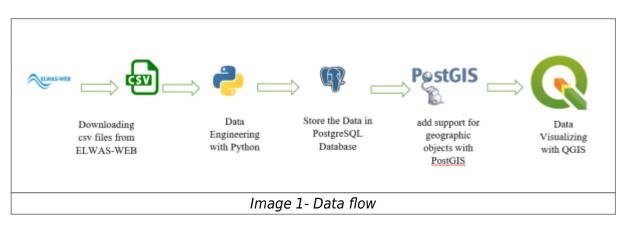

2.2 PostgreSQL/PostGIS

PostgreSQL is an open-source object-relational database management system (DBMS) known for its robustness, scalability, and extensive features. It is often referred to as "Postgres" and is one of the most popular and widely used databases in the world. PostgreSQL supports a wide range of data types, including numeric, text, Boolean, date/time, JSON, XML, and more. It provides support for complex queries, indexing, and advanced features such as full-text search, spatial data storage and querying, and transactional processing with ACID (Atomicity, Consistency, Isolation, Durability) properties.

PostgreSQL follows the SQL (Structured Query Language) standard, and it also provides additional features beyond the standard SQL specification. It supports stored procedures, triggers, and views, allowing developers to define custom business logic within the database itself.


PgAdmin is an open-source administration and development platform for PostgreSQL. It is a graphical user interface (GUI) tool that provides a convenient way to manage and interact with PostgreSQL databases.

PostGIS: PostGIS is an open-source spatial database extension for PostgreSQL. It adds support for geographic objects and spatial functions to the PostgreSQL database, enabling the storage, retrieval, and analysis of geospatial data. Geographic data such as points, lines, polygons, and multi-dimensional geometries can be stored and manipulated within your PostgreSQL database using PostGIS. The capabilities of the database are extended by PostGIS to handle spatial data types, indexing, and spatial operations. PostGIS has gained popularity in a variety of applications, including mapping, geolocation-based services, environmental analysis, urban planning, and transportation. Its combination with the power and versatility of PostgreSQL makes it a robust solution for managing and analyzing geospatial data in a relational database environment.

The below image shows the PGadmin tool.

	Dathboard Properties BOL Statistics	Dependencies Dependents	
• EServers (S)			
+ E Kalipak	Type	Nama	Restriction
+ E Kal-park project MALTER	- Tula	,RETURN ON ainumbad, geory	reerval
+ Ef Kal-park project 854068			
 III ProdgeetCL 13 			
- W stroke			
+ (TOutucopes III)			
- The stream			
> @Carts			
> 19 Catalogs			
 Covert Triggers 			
> Bückenstons			
 m Foreign Data Wommerk 			
+ RILanguages			
- Wilchernez (7)			
1 (B) (DM			
r tryplac			
 epublic 			
~ ÷ 100			
Au Committene			
 ReDomains 			
 IB/FTG Configurations 			
 M #TS Dictionaries 			
 Au FTS Paraera 			
 IEFTS Temprates 			
El Porsign Tables			
In Functions			
 Waterlarized Viewill 			
* TProcedures			
> t.15eguerices			
- 20 Fables (6)			
+ Ittiger_Mations			
+ Im hatsing_ge			
+ IIII hatalog_stoff			
+ ITTI measurements			
Emmensatele			
 El messivert 			
 Bit Trigger Functions 			
> IC Tapes			
- 10 Miews (7)			
 groupity_station_result 			
e 🔤 nikusi			
+ intral_geom			
		image 2- PGadmin	

Watching the below videos to understand how we can create schemas and tables in the PostgreSQL database.

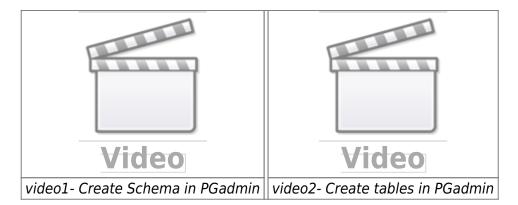

Create a database and schema based on the above video.

2.3 Data Engineering

2.3.1 Downloading the Data

In the first step, The data must be downloaded from here. To complete the process, download and extract the initial zip file, which contains four CSV files and one set of instructions. Refer to image 3 for guidance on selecting the appropriate zip file.

Car 🔜 UNI 🔜 Hame 🔝 Cyber 🔥 Drojski far iwwybs 💽 Arangaaasseet 4	🔅 Debbil desentregen 🚺 Überbick für Stude	BM92 peine 🖬 Betmanische Am	n
		Information und Nordrheim West	Tachsia alise
OpenGeocata.NRW 3 Dryges		(J.4	SCH 45 XML
Grundwassermessstellen NRW			
Linestenbereitige: Diese Daten sichen unter der Detentioner Des Datensatzbeschweitbung: BropertrygtetC_meta.pp Meladaten im G* Despend XRW	dicitions - Zero - Venitor 2.9. Jack Nutzing in ohr	n Einschränkungen nörr Sedingunge	en Andineig
Daten der Grundwassermessstellen in NRW als CSV			
Liaten der Grundwassermessstellen in Nikw als GGV			
Daten der Grundwassermessstellen in NRW als CSV		Letzte Änderung	Dataigroile
		Letzte Änderung 25-10.2021 08-48.00	Dateigröße 41.7 MB
Datai		and the second se	
Detai @ Openthypted_gav-menadeles-mesoweris_EPS625602_GDV.op	nbank	25-10-2021-00-48-00	41.7 MB
Datai ClosentrygetsG_gav-messaciellan-messawarka_RPSG28002_CBV.sp @ OpentrygetsG_gav-messaritant_RPSG28002_CBV.sp	nbank	25-10-2021-00-48-00	41.7 MB
Detai DenthypteC_gavmentelen-messwerte_EPS628022_CEV.zp (d) OpenhypteC_geveneentend_EPS628022_CEV.zp Daten der Grundwassermessstellen in NRW als Sqilte Date	nbank	29-10-2021 08-46-00 29-10-2021 08-49-08	41.7 MB 100.4 MB
Detai Detai DetainypteC_gaverassetiles-messwerks_EPS628022_CEV.ep (d) OpenHypteC_gaveseentand_EPS628032_CEV.ep Deten der Grundwassermessstellen in NRW als Sqilte Date Detai	nbank	25.10.2021 08-49-00 29.10.2021 08-49-00 Letzte Anderung	41.7 MB 100.4 MB Detelgrolle
Detai Detai DetaingsteG_gav-messatelen-messwerks_EPS628022_CBV.ap CoverHypteG_gav-researchard_EPS628032_CBV.ap Detan der Grundwassermessstellen in NRW als Sollte Detai Detai Detai CoperHypteG_gav-messatelen-messwerke_EPS025632_Solte.ap		28:10.2021 08:48:00 28:10.2021 08:49:00 Lettle Antisrung 28:10.2021 09:46:20	41.7 MB 300.4 MB Detelgrofile 86.8 MB
Datai @ OpenHypteC.gx+measurates-measurate.EPS622002_CDV.zp @ OpenHypteC.gx+measurates.text EPS622002_CDV.zp Daten der Grundwassermessstellen in NRW als Sqilte Date Daten Datei @ OpenHypteC.gx+measurates.enswerte_EPS622832_Sqite.zp @ OpenHypteC.gx+measurates.texter.EPS622832_Sqite.zp @ OpenHypteC.gx+measurates.texter.EPS622832_Sqite.zp		28:10.2021 08:48:00 28:10.2021 08:49:00 Lettle Antisrung 28:10.2021 09:46:20	41.7 MB 300.4 MB Detelgrofile 86.8 MB

After the above zip file has been extracted, the four CSV files and the instruction file can be considered, with a strong recommendation to read the instruction file first.

2.3.2 Python

Python is a high-level, interpreted, and general-purpose programming language known for its simplicity and readability. It was created by Guido van Rossum and first released in 1991. Python emphasizes code readability and has a design philosophy that emphasizes clear, concise syntax, making it easier to write and understand code. Python is used in several ways such as:

- AI and machine learning
- Data analytics
- Data visualisation
- Programming applications

In this project, we have used Python for data engineering, data pre-processing, and data analysis. Jupyter Notebook is used in this project to write Python codes. The Jupyter Notebook is an opensource web application that data scientists can simply write the code for and make it easier to document. Simply, we can combine Python codes, text, images, comments, and the result of the codes on the same page. The below image shows how code, text, and the result of the code can be seen on a single page.

Filo	Ed	t. Vie	w in	rsert Cell	Kemel V	Vidgets	Help						Tountest	Python 3 O		
				1911 - 1911 -		CLERCH I	20350							1 Manual Section		
3	+ 9	< 21	0 +	◆ ► Run		Markdo	nvri	(
	- 1	R	t hee	he file		-										
						~	Text									
		D	in't forge	st to add the "de	elimiter", norm	al csv fik	e's delimi	ter is "," but in o	ur case it's ";"	, so we need	to assign it.					
					11220100110001			No. Andrew Martin	25825523407							
						mi dal										
	In [read_csv(gw_s	reaction jointa	me, ues	insiter=	; , neader=	Tille,)	h		Python Code				
	-	df	= pd.r .head()		ractor jina	me, uer	limiter=	3, header=	Titles,)			Python Code				
	In [df	.head())	-					cemeinde id	-		beckschtung w	asserstand	_	
	-	df	.head() sl_nr	messstelle_id	name	•32	n32	gw_stockwerk		gemeinde_id	-	gwhorizont .	. beobachtung_w	vasserstand		
	-	df	.head())	name	•32				gemeinde_id 05111000	-			vasserstand		
	-	df	.head() s[_nr 67530	messstelle_jd 32505929	name UWB-Ddorf 01285	•32 343064	n 32 5678019	gw_stockwerk 1.0	grundstueck	05111000	gwhorizont_id NaN	gwhorizont . NaN		vasserstand	Ъ	
	-	df	.head() sl_nr	messstelle_id	name	•32 343064	n 32 5678019	gw_stockwerk			gwhorizont_id NaN	gwhorizont .		vasserstand -	₽	
	-	df 0	.head() s[_nr 67530	messstelle_jd 32505929	name UWB-Ddorf 01285	•32 343064 292077	n32 9678019 9645349	gw_stockwerk 1.0	grundstueck	05111000	gwhorizont_id NaN	gwhorizont . NaN Zwischenmittel Neurather		vasserstand -	₽	
	-	df 0	.head() sl_nr 67530 51044	messstelle_id 32505929 10448746	name LWB-Ddorf 01285 60GP012303	•32 343064 292077	n32 9678019 9645349	gw_stockwerk 1.0 NaN	grundstueck privat	05111000 NL000882	gwhorizont_id NaN S	gwhorizont . NaN . Zwischenmittel		vasserstand - -	₽	


2.3.3 Anaconda

Anaconda is an open-source distribution for python and R. It is used for data science, machine learning, deep learning, etc. With the availability of more than 300 libraries for data science, it becomes fairly optimal for any programmer to work on anaconda for data science Anaconda is used in this project. An environment on Anaconda has been created to install all the packages needed for this project.



Environment in Anaconda: A conda environment is a directory that contains a specific collection of conda packages that are used in the project.

How to create Conda environment: The below video shows how to create a Conda environment, how to activate it, how to install different packages on the environment and how to deactivate the environment.



Python packages: Python packages are collections of modules that provide additional functionality and tools to extend the capabilities of the Python programming language. Packages are typically distributed and installed using package managers such as pip (the default package manager for Python) or conda.

To get more details about conda environment, I highly recommend visiting the below webpage.

https://towardsdatascience.com/manage-your-python-virtual-environment-with-conda-a0d2934d5195

openhype environment: For this project, an "openhype" environment was created to install all the required packages. This environment ensures that all the necessary dependencies are properly installed and configured.

Several packages are related to data science but in this project, we have used the below packages. There are two ways to install the below packages:

install a package manually: In this way you need to install each package manually into openhype environment by the command prompt.

• **pandas:** Pandas is a popular open-source Python library for data manipulation and analysis. It provides easy-to-use data structures, such as DataFrame, Series, and Index, that are designed to handle structured data efficiently.

In this project, pandas was utilized to read the CSV files, clean the data, and perform data engineering tasks. To install Pandas, execute the following Python code within the openhype environment in the Anaconda prompt:

conda install pandas

• **sqlalchemy:** SQLAlchemy is a popular open-source SQL toolkit and Object-Relational Mapping (ORM) library for Python. It provides a set of high-level APIs that allow developers to interact with relational databases using Python code.

conda install sqlalchemy

• **psycopg2:** Psycopg2 is a PostgreSQL adapter for Python. It provides a Python interface for interacting with PostgreSQL databases, allowing developers to connect to a PostgreSQL database server, execute SQL queries, and perform database operations using Python code.

conda install psycopg2

• geopandas: Geopandas is an open-source Python library built on top of Pandas and other

geospatial libraries. It extends the capabilities of Pandas by adding support for geospatial data, enabling users to work with spatial data in a tabular format.

conda install --channel conda-forge geopandas


Certain packages require the specification of a channel for installation. This is why the above code includes the channel specification to ensure the correct installation.

• **jupyter notebook:** Jupyter Notebook is an open-source web-based interactive computing environment that allows users to create and share documents containing live code, visualizations, explanatory text, and more. It supports various programming languages, including Python, R, and Julia.

conda install jupyter notebook

To ensure the successful installation of all the aforementioned packages, it is crucial to install them within the openhype environment using the Anaconda prompt.

Load all the packages into the environment by a YAML file: To streamline the installation process for all the required packages in this project, it is recommended to create an environment named "Openhype" and load a YAML file containing the package specifications. The contents of the "openhype.yml" file, as shown in the image below, encompass all the necessary packages.

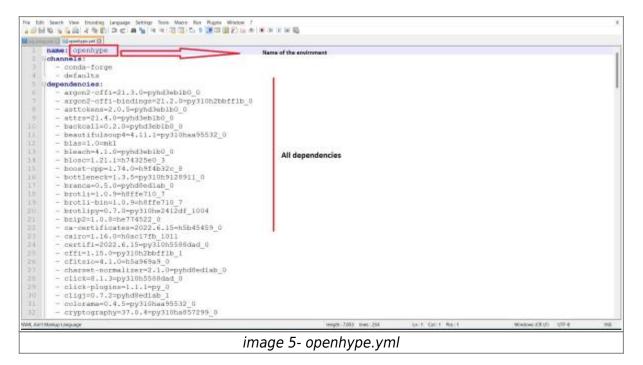

The following code allows you to create an environment based on the yml file. Keep in mind that the YAML file should be in the same directory as your Anaconda installation. If the file is located elsewhere, you will need to provide the full path to the file in the code. openhype.yml can be found from here

```
conda env create -f openhype.yml
```

How to create a yml file for the environment: With the below code you can export the yml file from the existing environment.

conda env export > openhype.yml

Since the four CSV files have been downloaded in the previous chapter, it is time to read the CSV files and initiate the cleaning process to make them ready for importation into our database.

Refer to the code section in our Notebook for more information Github (the below image).

Search or jump to	Pull requests issues Marketplace	isplare		0 +• \$ *
E sina7272 / LANUV_Groundwater	(Peee)			St We Schwands (+ 🕅 🖅 🚽 🗮 Staved () +
⊖ Code _ ○ Issoes _]. Poli requests	🛇 Actions 🛛 Projects 🗔 Wild	© Security ⊨ Insights © Setting		
	Primin - Prisent Song		Go to file Add file - Code +	About 0
	atna7272 update		atticit 2 hours ago (5) 22 commits	Ground water in NRW
	Read Contraction and the			
	Apyrib_checkpoints			
	Notebook			
	tata 🖿			
	1 (9) ¹			Refeases
	D granibute			
	D READMEntd			
	READMEINS	water		Packages Ni janiapa pukkhuć Fablutyov fen pukage
	Ground water in NRW			Languages
	0 e.m. m.			fragetor Postsheem 93.5% or (200), 5/25
		image	e 6- Github	

There below four notebooks should be run separately, in order to import data into the database.

• import_gemeinde.ipynb:

In this notebook, we will import the data of all geminde into the database.

• import_katalog_stoff.ipynb:

In this notebook, we will import the data of all the catalogue substances into the database.

• import_messstelle.ipynb:

In this notebook, we will import the data of all stations into the database.

• import_messwert.ipynb:

In this notebook, we will import the data of all values into the database.

2.4 Observation Data in the Database

After successfully downloading, cleaning, and importing the data into the database in the previous section, it is now time to examine the data within the database. Since we are working with a PostgreSQL database, we can utilize SQL commands to retrieve and analyze the data. Let's run some basic SQL commands to gain insights into the data.

To view our tables, we can use the following code. It selects all the columns from the "hygrisc" schema, which contains our tables. We limit the output to the first 100 rows to avoid overwhelming results.

select * from hygrisc.messwert limit 100;

Image 7 illustrates the outcome of the aforementioned command executed in PGAdmin. It displays the resulting data obtained from the execution of the provided SQL command.

	5 III To Q	Dashbi	oard Pro	perties	SQL Sta	distics De	ependenciel	s Dep	pendents	B	etwas/etw	az@alwi	as *										
,	S Domains	8 1			Q ~ 1	8 × 6	8 8	- 7	r 🕤	Nol	nit. 🗵		4		× 5	5	d-	£	18.4				
	ETS Configurations	67 11	was/elwar	Selwas v																			
	FTS Dictionaries	BLOOD BLOOD	Editor Q	uery Histo	ni.								_						_	Scratch i	Pad		
	As FTS Parters					No 2 191														-forditure	~		
	E Foreign Tables	1.9	elect .	from st	na.nessa	ert limit	E 100;																
	(i) Functions																						
	Materialized Views																						
	Procedures																						
>	C1 Sequences																						
~	Tables (6)																						
	> mgw_stations																						
	> E katalog.ge																						
	> 📰 katalog_stoff																						
	measurements																						
	> 🔠 measstelle																						
	> Emessivert																						
	N Trigger Functions	Data O	utput - Ex	olain M	lessages	Notificatio	na :																
	10 Trigger Functions								stoff or		outperior t					enterin	himatik		Lecture	-	manaphilt	transactat	
	Trigger Functions Trigger Functions Types Veess (7)	-	stput Er sLer (PK)bigint		stele_id	Notificatio		• •	stoff,re	,	probesgut Sext		issergebnia. Jole precisi	4 /	mess	ergebnis	hinweis	,	Bestimmur double pres	gigrente	/ massesthat	/ trensverfal	hrus
	10 Trigger Functions	-	sLor	/ mess	stelle_id	, presid	/ datamus data		tada.		probengut text Grundwasse	10		an /		ergëtinis.	hirweis	,	bestimmur double prio	ciaion	massestheit test indij mg/l	/ trensverfat text Membranfi	
	Trigger Functions Types Wees (7) groupby_station_result	-	sLer [PK]bigint	/ mess bagin k051	stella_kd 1999027	/ prajid	/ datum.g date 6. 1992-05	-21	Digiti	1244	18041	en *			[11.8]	ergatinis.	hirweis	,	Bestimmur double pric	claion	1000	00.4	ther
	N Trigger Functions Types Weens (7) > ■ proupby_station_result > ■ rinutat < ■ rinutat		sil.or (PK)bigint 1220	 Mess bagint K051 K053 	stella_id 2990027 2890029	/ prejid text 10 3/1992/1	datum_g date date 1992-05 1994-03	-21	bgrit	1244	ann Grunderässe	, 100 1		105.248	(m.0) (m.0)	ergatoria.	,birweis	,	bestimmur Gouble pre	ctalion	inuli mgil	Membranfi	ther iber
	Trigger Functions Types Veres (7) Jerospbg_station_result instat_peon fitut_peon Fitut_peon Fitut_peon Falses	1	eLer (PK)bigint 1229/ 1229/	mess tagin k051 k063 k072	2999027 2999027 2199028 2199028	 pna.id host 3/1992/1 3/1994/1 	datum, j date 6. 1992-05 6. 1994-05 6. 1993-01	-21 -29 -11	Colore	1244 1244 1244	Grundwasse Grundwasse	r do		105.248 d1.978	(mail) (mail) (mail)	ergetinis.	hirweis	,	bestimmur double pre	ctation	turi mgil turi mgil	Menibranfi Membranfi	iter iber iber
	Trigger Functions Type Vress (7) groupby_station_result fratut fratut fratut fratut_peon b Columns fulges \$ \$ Columns \$ \$ \$ Columns \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$	4 1 2 3	sl.xv [PK]bigint 1228/ 1228/ 1228/	mess bigint 1051 1053 1072 1077	stela_id 2990027 3890039 803003 803003	 pna_id hot 3/1992/1 3/1994/1 3/1993/1 	datum, g date date 10. 1992-05 16. 1994-03 16. 1993-01 16. 1992-11	-21 -29 -11 -02	o gen	1244 1244 1244 1244	son Grundwasse Grundwasse Grundwasse			105.248 d1.978 3.0989	(nul) (nul) (nul) (nul)	ergebria.	hirweis	,	bestimmur double pre	claion	inali mgil judi mgil judi mgil	Membranfi Membranfi Membranfi	iter iber iber
	Trigger Functions Tripre Wrens (7) groupby_station_result instaut wintst.geon Palues Quies Quies Quies Quies unitst	4 1 2 3 4	sl.av (PK) bigint 1229/ 1229/ 1229/ 1229/	mess bignt 1051 1053 10555 10555 10555 10555 10555 10555 10555 10555 10555 10555	stela_id 2990027 2890029 803000 803000 803000	 pra_id text 3/1992/1 3/1994/1 3/1993/1 3/1992/1 	Asturn, J daturn, J date 10. 1992-05 10. 1993-03 10. 1993-01 10. 1993-12	-21 -29 -11 -02 -22	Digiti,	1244 1244 1244 1244	Grundwasse Grundwasse Grundwasse Grundwasse			105.248 61.978 3.0989 2.25777	(mai) (mai) (mai) (mai) (mai) (mai) (mai)	ergetoria.	Jitweis.	,	Bestimmur double pre	claice)	ten Inge (jun) junik mgd inge (jun)	Membranfi Membranfi Membranfi Membranfi	iter iter iter
	N Trigger Functions Types Vense (7) > groupby_station_result > instat > histopeon > Rules > statistic > statistic > statistic > statistic > statistic > statistic > statistic	4 1 2 3 4 5	eLav [FK]bigint 1229/ 1229/ 1229/ 1229/ 1229/ 1229/	mess bigin 1051 1053 1072 10777 10777 10777 10777 10777 10777 1077	stele_id 1990027 3890039 803003 803003 803003 803003	 pre_id text 3/1992/1 3/1993/1 3/1992/1 3/1992/1 3/1992/1 3/1993/1 	 datum, J date 1992-05 1992-05 1993-01 1993-01 1993-01 1993-01 1993-12 1993-04 	-21 -29 -11 -02 -22 -21	byrr.	1244 1244 1244 1244 1244 1244	ann Grundwasse Grundwasse Grundwasse Grundwasse			106.248 d1.978 3.0989 2.25777 3.05493	(hat) (hat) (hat) (hat) (hat) (hat) (hat)	ergatinis.	Járweis.	,	Sestimmur double pro	calor	Top Sur Top Sur Top Sur Top Sur Top Sur Top Sur	Membranfi Membranfi Nembranfi Membranfi Membranfi	iter iter iter iter
	Trigger Functions Trigger Functions Type Wrens (7) groupby_station_result mitut mitut_peon & & & & & & & & & & & & & & & & &	4 1 2 3 4 5 6 7	sl.av [PH]bigint 1228/ 1228/ 1228/ 1228/ 1228/ 1228/ 1228/ 1228/	mess bight 4051 4053 4072 4077 4077 4097 4097	stele_id 2999027 3990027 803900 803900 803900 803900 803900 803900	 pre_id text 3/1992/1 3/1992/1 3/1093/1 3/1093/1 3/1992/1 3/1993/1 3/1993/1 3/1993/1 	 datum, j date 1992-05 1992-05 1994-03 1994-03 1993-01 1992-04 1992-04 1992-07 	-21 -29 -11 -02 -22 -21 -19	Digiti	1244 1244 1244 1244 1244 1244	Brundwasse Grundwasse Grundwasse Grundwasse Grundwasse Grundwasse	r do r r r		105.248 61.978 3.0989 2.25777 3.05403 11.0675 105.248	(m) (m) (m) (m) (m) (m) (m) (m) (m) (m)	ergebrie.	Jitweis	,	bestimmur double pro	daton	ten tign juri tign juri tign juri tign juri tign juri	Menibraefi Menibraefi Menibraefi Menibraefi Menibraefi Menibraefi	ther ber ther ther ther
2 		4 1 2 3 4 5 6	sl_er [PK]bigint 1228/ 1228/ 1228/ 1228/ 1228/ 1228/ 1228/ 1228/ 1228/	mess bigm k051 k052 k052 k057 k051 k054 k050 k051 k050 k050	stele_id 2990027 3990035 803003 803003 803003 803003 803003 803003	 pre_id text 3/1692/1 3/1693/1 3/1093/1 3/1093/1 3/1993/1 3/1993/1 3/1993/1 3/1092/1 3/1093/1 3/1093/1 	 datum, j date 1992-05 1992-05 1992-05 1992-05 1992-01 1992-01 1992-04 1992-04 1992-05 	-21 -29 -11 -02 -22 -21 -10 -10	opn	1244 1244 1244 1244 1244 1244 1244	Grandwasse Grandwasse Grandwasse Grandwasse Grandwasse Grandwasse Grandwasse Grandwasse	r do r r r r r		106.248 61.978 3.0989 2.25777 3.05409 11.0675 106.248 53.124	(m) (m) (m) (m) (m) (m) (m) (m) (m) (m)	ergebrie.	14		congre law	aun	tigen Bind figen Bind figen Bind figen Bind figen Bind figen Bind figen Bind	Membraefi Membraefi Membraefi Membraefi Membraefi Membraefi Membraefi	iter iter iter iter iter
> •		d 1 2 3 4 5 6 7 8	sl.av [PH]bigint 1228/ 1228/ 1228/ 1228/ 1228/ 1228/ 1228/ 1228/	mess bigm k051 k052 k052 k057 k051 k054 k050 k051 k050 k050	stele_id 2990027 3990035 803003 803003 803003 803003 803003 803003	 pre_id text 3/1992/1 3/1992/1 3/1093/1 3/1093/1 3/1992/1 3/1993/1 3/1993/1 3/1993/1 	 datum, j date 1992-05 1992-05 1992-05 1992-05 1992-01 1992-01 1992-04 1992-04 1992-05 	-21 -29 -11 -02 -22 -21 -10 -10	opn	1244 1244 1244 1244 1244 1244 1244	Brundwasse Grundwasse Grundwasse Grundwasse Grundwasse Grundwasse	r do r r r r r		105.248 61.978 3.0989 2.25777 3.05403 11.0675 105.248	(m) (m) (m) (m) (m) (m) (m) (m) (m) (m)	ergetinia	14		congre law	aun	ten tign juri tign juri tign juri tign juri tign juri	Membraefi Membraefi Membraefi Membraefi Membraefi Membraefi Membraefi	iter iter iter iter iter

image 7- messwert table in databse

Now with the above SQL command, we are able to see the other three tables that we have (The below codes).

select * from hygrisc.messstelle limit 100;

select * from hygrisc.katalog_stoff limit 100;

select * from hygrisc.katalog_ge limit 100;

Now we want to see more details for our tables and we will run the below codes.

Count the rows of each table: With the below code, we can see how many rows we have in each table.

select count (*) from hygrisc.messwert;

select count (*) from hygrisc.messstelle;

Filter the data based on Nitrate only: To determine the substance number of Nitrate, we need to retrieve the corresponding information from the database.

select * from hygrisc.katalog_stoff where name like 'Ni%';

Now B 0	🛯 🐃 🔍 Dashboard Properties DQL Ballatics Dependencies Dependents			
- (0 site	8 9 8 · E Q · # · 6 8 8 · 7 ·			
+ []+Colutions	Ø elven/elven@elven +			
 He Domano 	Query Editor Query History		Scretch Peel	
 IQLETE Configurations 				
+ ID FTS Dictionaries	1 select + from sine Astalog, stoff where name 14kg 'Nith			
 Aur PTS/Paralisers 				
+ TS Templates				
 IIII Foreign Tables 				
 Withfunctions 				
< 🦉 Materialized Vevia				
 II):Procedures 				
+ L/Sequences				
- I Tables (0)				
 Importations Importation or 				
> Illianing duff				
> El Nespuramenta				
· mirrennrielle				
+ III messivet				
 Bit Trigger Punchares 				
 Types 				
- 🔤 views (7)	Dete Output Explain Massages Notifications			
Provide the state of the sta	statur a neret a beachesturg a cesul			
+ nitrat	staff_ar a herne a bescheitung a besch			
- Writer from	1 1143 Non Pull 7440-05-1			
+ D Columna	2 1188 1604 (vul) 7445-654			
+ The Paler	1 1244 titlet pull bull	1		
+ De mighen	4 York Inter-Stational Ind. July			
+ metat_peom	5 T24 Meet Pull Pull			
+ term	6 1047 ternösckent pull pull			
+ term2	7 1967 Northanskie Tenskie (nali (nali			
F (e) tiger	8 2290 Ministered (1990)			
+ 🐵 toper_dette	 2163 Matches 2163 Matches 2163 Matches 			
> (e) topology	10 2507 Millionessipher (MA) [147-19-			
 mpostpes 	H 1768 Hosedana put 1999-6			
 Terndiala, postgis 				
s 📰 tseerap				
 In Login/Terrup Roles 	13 4184 Notement (no.0) 50457			
Interpretation in the second secon	14 4168 Mangaram (nutl. 180824-4.			

According to the information presented in "Image 8," the substance number (stoff_nr) of Nitrate is **1244**

select * from hygrisc.messwert where stoff_nr = '1244';

Now we can filter the messwert table based on Nitrate. In this step, We can save this new table as a new "view".

What is a view: a view is a virtual table that is derived from one or more existing tables or other views. A view does not store data physically but rather provides a way to present data from underlying tables in a structured and organized manner. It acts as a predefined query that can be used to retrieve and manipulate data. The below code creates views:

```
create view hygrisc.nitrat as (select * from hygrisc.messwert where stoff_nr
= '1244');
```

We now have a "nitrat" view, which can be accessed just like a table using the following code. This view is filter of our messwert table based on "1244" which is "Nitrate"

select * from hygrisc.nitrat ;


Group by the two tables: the Group by clause is used to group rows based on one or more columns in a table. When working with two tables, you can perform a GROUP BY operation to group the data based on common values from both tables. In this section, we want to group by our two tables (messwert and messstelle) only in Nitrate. These two tables have a column **messstelle_id** which means station id.

```
select messstelle_id, count(*) from hygrisc.messwert where stoff_nr =
'1244' group by messstelle_id;
```

 an broket 		8 - 10	Q - # - 1	B 2- T - she v B F + 4 D - 5 5 d- 4 R-		
+ @ 1010 + EL Colladiante	A day	voluce@elwas -	1			
+ A Domana	and the second sec	or Query Hator			Scrietzh Paul	
+ D.FTS Configurations	-				ochron Piel	
+ DLF75Dictionatee	1 sels	out mesostalle	the count(+)	from sine.mesowert where stoff,nr = "1244" group by mesostelle_id		
+ A+FTS Farsers						
+ 💭 FTS Templates						
 III Foreign Tables 						
+ Wehnstone						
+ 🛄 bitaterizitzent Veivez						
+ C)Procedures						
 N.R Secondors 						
- III Tables (0)						
 III gw_stations 	1.1					
s minatelog.ge						
> Ittikatalog_stoff						
 Esmeasurements 						
ittrazzatelie						
 messuet 						
+ Big Trigger Functions + Int Types						
- Views (7)						
encoded and the station result	Dyla Outp	ut Explain M	ranges tectficat	- 679		
e Criteri		essenteta de 1	auti a			
- Cathat, peom	4.50					
+ 🛅 Column		10131310	24			
e em Faules	2	18290408				
+ 2+ Triggers	- T	18290411	28			
> Cartat		(820069)	- 59			
> suitet_peore	- A.S.	10200710	1.1			
> torp	4	18280806	20			
+ 🚺 tergil	T. T.	12200940	1.12			
 ib tiper 		10391039	- 10			
 Ide tiger_chata 		18221117	0			
 B topology 	18	10201202	-			
> Tr postpres	11	(8281294	28			
 Sternete.postgo Sternep 	12	10291306	28			
Ga Login/Ursup Roles	- 13	18291912	42		Lange and the second second	
		10401214			 Buccessifully run. Total guery runt 	me. 971 mper. 2632 rows affected

Image 9 shows that each station id has how many single measurements for the Nitrate only. I highly recommend opening the below website to get more deep into how "group by" works and how we can use it.

https://www.w3schools.com/sql/sql_orderby.asp



Maximum date in nitrat table:

select * from hygrisc.nitrat where datum_pn = (select max(datum_pn) from hygrisc.nitrat); 2024/05/18 23:26

13/20

Admin File* Object* Tools* Help*		
	🖥 🙀 Q. Dashboard Properties BQL Instatus Dependencies Dependence 🗰 environment@environ	
· · · · · · · · · · · · · · · · · · ·	8 2 2 - 2 2 - 2 - 2 - 2 - 2 - 2 - 2 - 2	
> \$3 Collectors	(viewastikhous)olvez =	
 Re Domaina 	Guary Editor Quary History Scratch Pad	_
 (g) FT3 Configurations 	E select + from sing-infrast where detailor + (select max(datum.pn) from sing-infrast)	
 PTS Stationaries 	 start - the startstrate and networkst - startstratecht the startstratecht 	
Au FTS Partners BFTS Templates		
Bit Poreign Telden		
+ B-Functions		
 Materialized Views 		
 CProtochom 		
 + Elegances 		
~ 🛅 flableo (ki)		
+ CIII (av., whattores		
+ militatarg.staft		
 Interacting second Interacting second 		
> En mesostelle		
+ Itt mexavert		
> N0 Trigger Functionse		
> ID Tutes		
 Were (7) groupby_station_result 	Data Output Explain Messages Indiffications	
+ Softer Control And	La resultable i pradi den a den a den e polariti entre e polariti e secondariti e secondaritati e secondariti e secondariti e se	16,84
+ ntal geon		
 Tolume 	1 T7721212 SUBT77 SQULVIT SCHW177 T344 Guernesse at [uu] Jul mul Decempted soc-Augue errors. S 2015	109.0
 Interview 		
+ \$+ Triggers		
+ mattat		
 astid, pion. statut 		
+ Etavla2		
+ -(E) Eiger		
 Shipecata 		
 Brispology 		
> 😤 postgree		
 mitemplate_postplit mitemplate_postplit 		
/ (b.Login/Group Roles		
> In Tatletracet		
	Image 10 Maximum of the date in the nitrat table	
	Image 10- Maximum of the date in the nitrat table	

As we can see in Image 10, the maximum date is 2021-08-17

Minimum date in nitrat table:

select * from hygrisc.nitrat where datum_pn = (select min(datum_pn) from hygrisc.nitrat);

A2W 8 1	🗄 🐚 Q. Dashboard: Properties: 9(3). Statistics: Dependencies: Dependen	
 so patiet 	8 8 8 4 8 9 8 4 8 8 8 T - 100 - 1 8 9 4 8 4 5 8 4 4 8 4	
 Bit Contations 	S down/dwnsg/dwna -	
+ & Sortains	E-27 Introduction and the Dary Hallow Deep Hallow	South Pal
 B-PTS Coritiquations 		308001981
In FTS Dictionaries	3 select + from sine, nitrat where detum_pn = (select win(detum_pn) from sine.without);	
6 MA FTS Paraelo		
 FTS Templetes 		
> UP Foreign Tables		
 bis Functions 		
 Materialized Views 		
> 1)Procedures > 1.1Sequences		
= CTabres (5)		
> migw_stations		
 Etvatalio.or. 		
Profe position of the		
+ 🛄 messurementis		
 IIII measafete 		
+ IIII measuret		
> Ith Trigger Functione		
 (c) Types (c) Views (7) 		
+ Broutin_station_result	Data Output Eiplain Messages Notifications	
+ entit		envertatives a vertatives a rot_ort a hexault a alcoal_dat
- Citrat geom	National and the state that any second state and better and second states and second	
* Bröstames	1 122734201 10212144 (1193110) 10411044 10100 1044 10400 1041 10400 1041 10400 1041 10400 1041 10400 1041 1040	sampsat juli intr_Bek 2011-te28
> =====		
+ 3+Thopers		
+ withat		
+ mattat_givinn		
+ ternp		
+ interest		
+ do tiger data		
+ for topology		
 Im postgiwa 		
> mit temptate_postgin		
> stitthemap		
 -lb.Logn/Group Roles 		
8 Tabiwipacet		

As we can see in Image 11, the minimum date is 1951-04-30

Create geometry column in messstelle table: In this section, we want to create a geometry column from **e32** and **n32** columns from the messstelle table. With the below code, we are able to create a new column and we set the name as **geom**

```
ALTER TABLE hygrisc.messstelle ADD COLUMN geom geometry(Point, 25832);
UPDATE hygrisc.messstelle SET geom = ST_SetSRID(ST_MakePoint(e32, n32),
```

25832);

wsor 🖬 🖫 🐄	Q Dashbo	ard Properties	SQL Statistics De	pendenc	cies Dependents	was/elwas@elwas*							
> (public	8 9		Q - # - 6	8 1	2° T - 100	ni v 🖩 🕨 v	4		4- 1 E-				
✓ ③ sina	d2 etc	as/olwasgielwas	s v		STATISTICS.	and the second second second	-	and the second second	Contraction of the local division of the loc				
→ ┃↓ Collations	Discourse and	ditor Query His									cratch Pad		
 Image: Second sec			sina.messatelle							- 25	chalch Pag		
 (b), FTS Disclosures As FTS Parsies (c) FTS Templates (c) FTS Templates (c) Functions (c) Functions (c) Procedures (c) Procedures (c) Procedures (c) Exactions (c) Exactions 													
 > ES gw_stations > Es katalog_pe 													
> === kataliog_pe > === kataliog_stoff > === measurements			Messages Notification									1	
 Matalog_pe Matalog_stoff measurementa measurementa 		filterisenge_cm	a sumpfishrisings_cm		euebeuðurchmesser, mm. double avecision	Isatoriacher, ruhe, en double precision	10 <u>a</u>	ettbaulaange.cm double precision	oberkante, fitter, orr double precirion		unterkante, filter, om doctie precision		geon geonetry
b tataliog.pt b tataliog.pt b tataliog.stoff b mossurements b mossurement b messurement		filterisenge_cm double precision			double precision	Assoriactur, ruha, as double precision	no 🔒	actions buenoous	oberkante, filter, or double precision	but	double precision		geom geometry 0101000020E64
 Matalog_pe Matalog_stoff measurements measurements 	ster 🚔	filterisenge_cm double precision	sumpfrohrbenge_cm double precision	۵ (double precision	 double precision 		actions baccooca	one buone		double precision	but	geometry
Similar Statution (Second Statution)	ster 🛕	filterisenge.cm double precision	sumpfrahrlaunge.cm double precision	A (double precision	double precision	(h.f	1	(sel)	Ind	double precision	(huit) 93490	geometry
Similar Section 2	sber 🛕 Rimedia. I Padetti.	filterlaengecm double precision	sumpfishtiongs.cm double precision	a Juni Juni	double precision	double precision null 110	teri Neti		pull 2000)rul) 10345	double precision 	(hul)	geometry 0101000020EB64 0101000020EB64 0101000020EB64
 Extantion_pe Extantion_stoff If measurements If measurements If measurements If represented If represented<	sber 🛕 Rimedia. I Padetti.	filterisenge, om double precision	sampfishrlaunge.cm double precision (null (null	a Jud Jud Jud	double precision	double precision null 110 null	jur jur jur		(m) 5000 (m) 00006 bacaroo	(rul) 10545 (rul)	double precision	(hul) 9349 (hul) 7505	geometry 0101000020E86- 0101000020E86- 0101000020E86- 0101000020E86-
Batalog_pe Batalog_pt Batalog_stmtH Immeasurements Immeasurements Immeasurement Workinger Functions Traper Workinger Functions Traper Workinger Station_result Immeasurement Im	itter Annedia. 1 Padetta. 1 Deltau.	fiberisenge, cm double precision	sampfrohrleenge_cm double precision (rul) (rul) (rul)	Burl Burl Burl Burl Burl	double precision	double precision null 118 null	turi turi turi turi	1 1 1	2000 [104] [104] [104]	(nul) 10345 (nul) 7585	double precision	(hul) 9349 (hul) 7505 (hul)	georetry 0101000020E86- 0101000020E86- 0101000020E86-
Second Seco	iber A Nimedia. I Padetta, I Debru. Sustemi,	fiberisenge, cm double precision	sampfrohleenge.cm double precision (null) (null) (null) (null)	Red Bed Bed Bed Bed Sed	double precision	double precision null 110 null null and	hoj hoj hoj hoj hoj hoj		10000 (10000) 10000 (0000 (0000) 1000 (0000) 1000 (000) 1000 (0000) 10000 (0000) 1000 (0000) 1000 (0000) 1000 (0000) 10	(nul) 10345 (nul) 7505 (nul)	double precision	(Hult) 9349 (Hult) 7505 (Hult) 3452	geometry 0101000020EB64 0101000020EB64 0101000020EB64 0101000020EB64 0101000020EB64
Set Natalog_pe Set Natalog_pe Set Natalog_stuff Metabog_stuff Metabog_stuffe Set messwert With Traper Functions Compare Weaves (7) Set group depositation_result Set mature mature compare co	iber A Nimedia. I Padetta, I Debru. Sustemi,	fiberisenge, cm double precision	a samp frok/lawnga.cm (sub) (Burd Burd Burd Burd Burd Burd	double precision	double precision aufi a	koj koj koj koj koj		2000 (1000) 2000 (1000) 1000 (1000) 1000 (1000) 2000	(null 30345 (null) 7505 (null) 3455	double precision	(nul) 9349 (nul) 7505 (nul) 3452 3100	geometry 0101000020EB6- 0101000020EB6- 0101000020EB6- 0101000020EB6- 0101000020EB6- 0101000020EB6-

The "messstelle" table has been enhanced with an additional column called "geom," which contains the geometry information representing the location of each station.

Merge two tables:

In this section, we aim to merge the "messwert" and "messstelle" tables based on the common column, "messstelle_id." To achieve this, we will select the desired columns from each table and then perform the merge based on the "messstelle_id" column.

```
select t1."messstelle_id", t1."name", t1.geom, t2."stoff_nr",
t2."messergebnis_c", t2."masseinheit",
t2."datum_pn", t2."messergebnis_cm" from hygrisc.messstelle t1 ,
hygrisc.nitrat t2
where t1."messstelle_id" = t2."messstelle_id";
```

	Bashooard Properties SQL Statistics Dependencies Dependents 🖀 disculoreogradieus.*	
 Option 	8 8 8 - 2 0 - 8 - 5 2 2 T - mm - 8 9 - 6	0 · · · · · · · · · · · · · · · · · · ·
* @ una * El Collations	🔗 efenn (elemanisten) -	
 Sp. Domains 	Gwery Editor Query History	Scottch Pad
F D PTS Configurations] select ti."meanshelle td", ti."new", ti.goon, t2."stoff or", t2."meanergebria.c	ef. 42. Summal chatter
5 By F75 Dictoriation	2 U. "detumpe", 12. "essergebrits.ce" free site-mesostelle 11 , site-mitrat 12	s p tas minimum p
5 #aF75Painers	b where the "menantable fd" = the "menantable fd";	
🕴 🧮 FTS Templates		
 Etherwige Tables 		
 Ein Planchieren 		
Materialized Wewes.		
 Processare Coldecusercas 		
+ CTables IS		
> III de stations		
* (Thiatalog ge		
 Ithatalog.codt 		
+ ITTreesawheets	Data Dutjua Explain Mescages Notifications	
* Ell receptoile	annestatik. If a new a geom a too too too a new and a set	ter provingebrik, pri
	1 200002717 BoxPec 01019002205540. 1344 100.245 rep/ 180	10/09/27 +
	E 80802019 HAHAL 01018000398940, 1344 40,0905 Hajd 189	10-17-38 a
* W Tegger Functions * C Types		
	8 8030201 HAVE, INTERCEPTION. 1244 RE201 April 189	nach II -
 Typen Verez (7) Typingraupby, station_result 		Nacio () =
 C) Types Veren (7) C) Unren (7) 	a accord store, orefunctioners, take skill real real	
 Types Weens (1) Typesolvy_station_insult Styniadity_station_insult Styniadit_spean 	8 8050179 17026. 0101800158888. 1348 84.07 rept 140 5 9050178 17026. 0101800008440. 1349 44.07 rept 140	40-00-04 -
 Types Wrens (7) Strandy Judien, reall Strandy Judien, reall Strandy Just Strandy Jean Strandy Jean Colores 	II 000017W ITEML OFFINIOEDEMAIL Table ALL?/ regil Here 3 000017W ITEML OFFINIOEDEMAIL Table ALL?/ regil Here 6 800017W ITEML OFFINIOEDEMAIL Table ALL.94 Here 5 800017W ITEML OFFINIOEDEMAIL Table ALL.94 Here	10-02-03 = 10-07-15 =
 Types Wrene (7) Stransfort, shifting, result Stratut, journ Stratut, journ Colomes Others 	# 000017W \$T004. OrtHon0008H44. T244 #4.27 mpl He 5 900017W \$T004. OrtHon0008H44. 1244 44.27 mpl He 6 900017W \$T004. OrtHon0008H44. 1244 44.04m mpl He 7 290008181 He/msc. 0018100209844. 1244 He/mml He/ml 109	00000
 Types Wren (7) Types (provide control of the control of t	II 000017W ITELE 0101000000000000000000000000000000000	000204 =

In order to have the above SQL command available as a new view for the subsequent section in QGIS, we should store it accordingly.

```
create view hygrisc.nitrat_geom as (select t1."messstelle_id", t1."name",
t1.geom, t2."stoff_nr", t2."messergebnis_c", t2."masseinheit",
t2."datum_pn", t2."messergebnis_cm" from hygrisc.messstelle t1 ,
hygrisc.nitrat t2
where t1."messstelle_id" = t2."messstelle_id")
```

2.5 **QGIS**

QGIS is a free and open-source geographic information system (GIS) software. It provides a wide range of tools and functionalities for visualizing, analyzing, and managing geospatial data. QGIS supports various data formats and allows users to create, edit, and publish maps.

You can download QGIS for free from the below link.

https://qgis.org/en/site/

The below video shows how to download and install QGIS for Windows which is highly recommended to watch before installing it.



To gain a better understanding of QGIS, I recommend watching the following video, which provides valuable insights and guidance on using the software.




Create a time series video: In this section, our objective is to generate a time series video depicting the changes in nitrate concentration over time in North Rhine-Westphalia, the most populous state in Germany. To begin, we must download the shapefile for North Rhine-Westphalia and import it into QGIS for further analysis and visualization.

Three below shapefiles need to be downloaded

- entire state shapefile (dvg1bld_nw.shp)
- kreis shapefile (dvg1krs_nw.shp)
- Gemeinde shapefile (dvg1gem_nw.shp)

All three shapefiles can be downloaded from here. After downloading the shapefiles, we can proceed to load them into QGIS for visualization and analysis. The below video shows how to load the shapefile in QGIS.



Now we can see the map of NRW, kreis and Gemeinde. There are two options to create a video for time series.

Locally with shapefile: In here, we need to have a shapefile that consists of the nitrate concentration over time. download the notebook from here and run the Python codes to create two shapefiles. then we should load these two shapefiles to the QGIS. The first shapefile consists of all stations in NRW and the second one consists of the nitrate concentration.

The below video shows how we can load shapefiles to QGIS.



Connect to Database: The below video shows how we can connect our QGIS to Database and load the file from Database.



3 Dashboard

In this section, the process of creating an interactive dashboard for our data will be explored. An interactive dashboard is a versatile tool that allows data to be interacted with, analyzed, visualized, and key information to be monitored by users.

This section discusses two approaches to creating a dashboard. The objective of this dashboard is to provide a user-friendly and interactive interface for data exploration and visualization, accessible even to non-programmers. Such a dashboard plays a crucial role in enhancing data comprehension and is widely utilized by managers and decision-makers to facilitate informed decision-making processes.

One notable example of this type of dashboard is the Covid-19 dashboard, which has gained widespread usage worldwide, including in Germany. The Covid-19 dashboard provides users with valuable insights into the number of new cases and deaths reported over various time periods. It helps individuals track the progression of the pandemic and understand the impact it has had on different regions and countries.

In our specific case, the objective is to develop a straightforward dashboard that showcases the map of North Rhine-Westphalia (NRW) alongside the concentration rates of Nitrate and Sulfate at different time intervals. This dashboard will provide a visual representation of the spatial distribution of these pollutants and enable users to observe any temporal variations in their concentrations within NRW.

3.1 Plotly Dash:

Plotly: Plotly is a computing company located in Montreal, Canada. They develop online data analytics and visualization tools. Plotly offers online graphing, analytics, and statistics tools for their users, as well as scientific graphing libraries for Python, R, MATLAB, Perl, Julia, Arduino, and REST. Plotly offers several open-source and enterprise products such as Dash which have been used for creating simple and interactive dashboards in this project.

Dash: Dash is a framework to build data apps rapidly not only in Python but also in R, Julia, and F#. According to Plotly's official website, Dash is downloaded 800,000 times per month which shows that nowadays Dash getting more popular. Dash is a great framework for anyone who uses data with a customised user interface. Through a couple of simple patterns, Dash eliminated all of the technologies as well as protocols that are needed to make a full-stack web app with interactive data considerations. Another good feature is that Dash is running on web browsers so it means that no other application needs to run it.

To learn more about creating a dashboard with Plotly Dash, you can follow the link provided below. This resource contains comprehensive tutorials that guide you through the process of building a simple dashboard using Plotly Dash. These tutorials will provide you with step-by-step instructions and examples to help you create interactive and visually appealing dashboards using Plotly Dash.

https://www.youtube.com/c/CharmingData


Dash is also offering some dashboards examples which could be really nice and helpful to get ideas. | Click here for Dash gallery

All the source codes of the dash gallery are available in | here

4. Result


Nitrate concentration 2000-2010

The video below shows the concentration of nitrate in North Rhine-Westphalia (NRW) from 2000 to 2010. This visualization was created using QGIS 3.16. By watching the video, you can observe the temporal changes in nitrate levels across NRW during the specified time period.

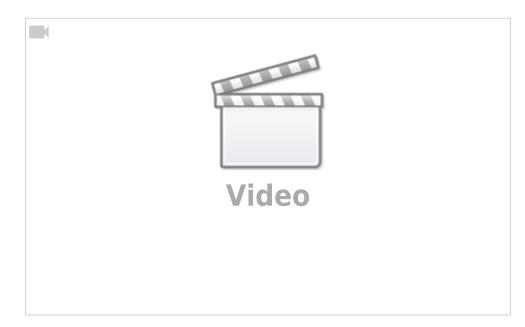


Nitrate concentration 2010-2020

The below video has shown the concentration of nitrate in NRW from 2010 to 2020. The video is created with QGIS 3.16

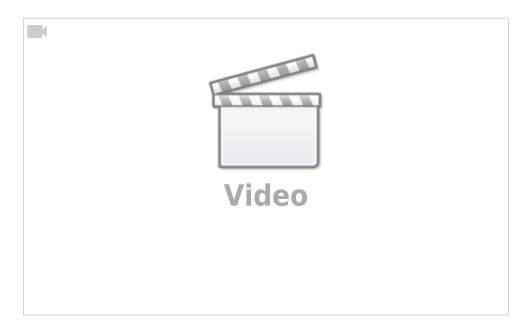


Sulfat concentration 2000-2010

The below video has shown the concentration of sulfate in NRW from 2000 to 2010. The video is created with QGIS 3.16

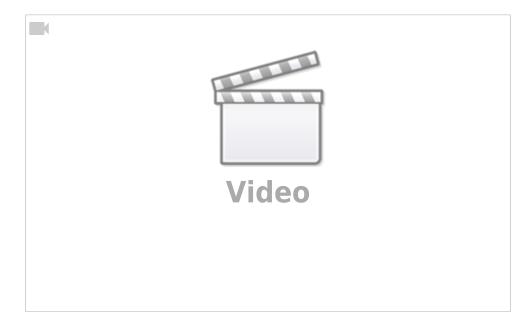

Sulfat concentration 2010-2020

The below video has shown the concentration of sulfate in NRW from 2010 to 2020. The video is created with QGIS 3.16

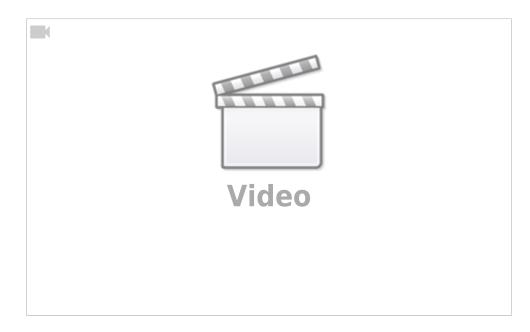

5. Project codes

All the codes are available in the below link.

Click here for project codes

Weitere Infos

• EOLab-Wiki-Seiten zum Thema Grundwasserdaten in NRW

From: https://wiki.eolab.de/ - HSRW EOLab Wiki

Permanent link: https://wiki.eolab.de/doku.php?id=eolab:openhype:start&rev=1684735029



Last update: 2023/05/22 07:57