# **OpenHyPE: OpenHygrisC Data Processing for Education**

- Project funded by the Federal State of Northrhine-Westphalia (NRW)
- Funded by Ministerium für Landwirtschaft und Verbraucherschutz NRW (MLV)
- Project duration: 15.12.2021 30.06.2023

**ZUSAMMENFASSUNG, EINLEITUNG UND ZIELE AUF DEUTSCH** 

# 0. Abstract

The State Agency for Nature, Environment and Consumer Protection (LANUV) of the federal state of North Rhine-Westphalia (NRW) provides extensive quantitative and qualitative groundwater monitoring data. This contributes to the fulfillment of the European Water Framework Directive as well as the EU INSPIRE Directive for an open interoperable spatial data infrastructure.

NRW operates its own water-related data portal **ELWAS-WEB**, which also provides the groundwater database **HygrisC**. ELWAS and HygrisC are not easy to use and provide only limited exploratory data analysis capabilities to the public.

However, the state publishes much of its groundwater data as an **open data archive** called **OpenHygrisC**, which contains several data tables in **csv format**. In particular, the **big data** in the measurement table, which contains all time series with **more than 3.6 million individual measurements** (table rows), and the table with the spatial coordinates of the groundwater monitoring wells require the use of a **spatially enabled object-relational database management system (Spatial ODBRMS)** and extensive **data engineering** before insertion into the database.

The goal of the **OpenHyPE project** is to develop a first set of **Open Educational Resources (OER)** to train the setup, filling and use of a **geospatial-temporal database** with the OpenHygrisC data. Due to the **graduated level of difficulty**, the project addresses **students** from **secondary schools** as well as **universities** in the state of North Rhine-Westphalia and beyond.

All software products used are **Free and Open Source Software (FOSS)**. The database, which we call **OpenHyPE DB**, is based on **PostgreSQL / PostGIS** and establishes the center of the system for environmental data analysis and presentation. The OER demonstates how the geographic information system **QGIS** as well as **Python programs** in the **JupyterLab development environment** interoperate with the OpenHyPE DB to select, analyze and display the data in the form of time dependent maps or time series. We use Python and Jupyter from the **Anaconda distribution**.

The start-up funding for the OpenHyPE project is used to raise awareness of the **NRW's valuable** open environmental data collection among young people as well as to contribute to interdisciplinary STEM promotion in general and education for sustainable development (ESD) in particular by linking environmental science and computer science.

### 1. Introduction

### **1.1 Problem Description**

The state of North Rhine-Westphalia (NRW) operates comprehensive and professional measurement networks for the collection of environmental data through the LANUV. As part of Open.NRW and driven by the INSPIRE Directive of the European Union as well as other directives such as the EU Water Framework Directive (WFD), the state of NRW makes extensive data products openly accessible and freely usable on various platforms (Free and Open Data).

The state of NRW is a pioneer in Germany in providing open and (cost)free geodata. These data are a real treasure and form the basis for potentially massive knowledge gains in the field of environmental and nature conservation. Nevertheless, it seems that only a comparatively small group of people really uses this potential. Therefore, the OpenHyPE project has set itself the task of integrating this data stock into university teaching and developing corresponding freely accessible teaching material that can be used not only by students but also, to some extent, by pupils to learn the basics of environmental data processing. The start-up funding will be used to implement the first steps of developing such training material.

We follow the paradigm of "problem based learning": the necessary knowledge and skills are identified and taught based on a concrete socially relevant problem. The solution of the problem identified as significant is the motivation for learning.

At the beginning we want to develop the material on the basis of the problem area "groundwater protection". The Ministry for Environment, Agriculture, Nature and Consumer Protection NRW (MULNV) operates its own water-related data portal called ELWAS-WEB via the "Landesbetrieb Information und Technik Nordrhein-Westfalen" (IT.NRW). Data from the statewide groundwater database HygrisC are also held in this portal. ELWAS and HygrisC offer limited exploratory data analysis capabilities to outsiders. From the point of view of usability engineering, which deals with the user-friendliness of technical systems, improvements are desirable with regard to usability as well as data analysis possibilities, because exploratory data analysis and data mining in particular help to identify structures and relationships between data. ELWAS and HygrisC are therefore only suitable to a limited extent for teaching the basics of environmental data analysis, but they can be used in the classroom as supporting material.

On the portal OpenGeodata.NRW extensive data with spatial reference - also called geodata - are made available, which often have a time reference, such as land use changes or measurement data series on water quality. Excerpts of the HygrisC groundwater database of the state of NRW, published under the name OpenHygrisC, are also located there. These groundwater data can ideally serve as a basis for building one's own environmental database, which the learners can use to learn about concepts of data management and data analysis.

### 1.2 Project Goals

The following components are to be realized:

- Development of OpenHyPE geodatabase based on PostgreSQL/PostGIS to manage spatial and temporal data on groundwater quality and quantity.
- Problem-related free online course material (OER), tutorials, video tutorials, instructions,


#### program code,

using Free and Open Source Software (FOSS):

- Introduction to the State Agency for Nature, Environmental and Consumer Protection (LANUV).
- Introduction to groundwater protection
- $\circ\,$  Introduction to the Geographic Information System QGIS
- $\circ\,$  Introduction to the relational database PostgreSQL and the query language SQL
- Introduction to the geodatabase extension PostGIS
- $\circ\,$  Introduction to the processing of geodata with the programming language Python
- $\circ~$  Installation of the OpenHyPE database management system
- Discussion of the data model and upload of the OpenHygrisC data of the LANUV
- Automatic creation of diagrams on time series of water quality
- Automatic generation of groundwater chemistry maps
- $\circ\,$  Creating simple dashboards with interactive online graphs and maps
- Introduction to data mining (descriptive statistics, searching for correlations)

# 2. Implementation

### 2.1 Data Flow

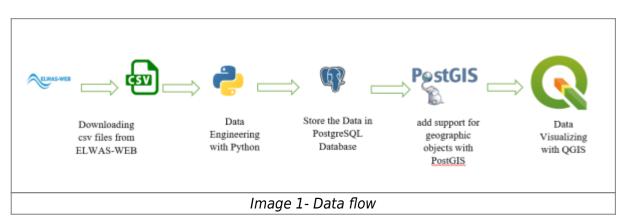

# 2.2 PostgreSQL/PostGIS

PostgreSQL is an open-source object-relational database management system (DBMS) known for its robustness, scalability, and extensive features. It is often referred to as "Postgres" and is one of the most popular and widely used databases in the world. PostgreSQL supports a wide range of data types, including numeric, text, Boolean, date/time, JSON, XML, and more. It provides support for complex queries, indexing, and advanced features such as full-text search, spatial data storage and querying, and transactional processing with ACID (Atomicity, Consistency, Isolation, Durability) properties.

PostgreSQL follows the SQL (Structured Query Language) standard, and it also provides additional features beyond the standard SQL specification. It supports stored procedures, triggers, and views, allowing developers to define custom business logic within the database itself.

PgAdmin is an open-source administration and development platform for PostgreSQL. It is a graphical user interface (GUI) tool that provides a convenient way to manage and interact with PostgreSQL databases.

**PostGIS:** PostGIS is an open-source spatial database extension for PostgreSQL. It adds support for geographic objects and spatial functions to the PostgreSQL database, enabling the storage, retrieval, and analysis of geospatial data. Geographic data such as points, lines, polygons, and multi-dimensional geometries can be stored and manipulated within your PostgreSQL database using PostGIS. The capabilities of the database are extended by PostGIS to handle spatial data types, indexing, and spatial operations. PostGIS has gained popularity in a variety of applications, including mapping, geolocation-based services, environmental analysis, urban planning, and transportation. Its combination with the power and versatility of PostgreSQL makes it a robust solution for managing and analyzing geospatial data in a relational database environment.

The below image shows the PGadmin tool.

	Dashboard Properties 908, Ittalictics	Dependencies Dependents	
· El Servera (5)	law.		
• El Kalipan	Туре	Name	Restriction
<ul> <li>Er Kalistark project MALTER</li> </ul>	m Fale	"RETURN ON sinu rithel, geory	remai
+ ET Kal-park project READER			
> 目Protgeotick 13			
+ U stvate			
+ @Dutabages140			
- 🕾 elwist			
> @Cents			
> - McCatanoge			
<ul> <li>Event Trippera</li> </ul>			
> Bildwatera			
<ul> <li>         Foreign Data Wommerk      </li> </ul>			
+ //JLanguages			
<ul> <li>VSchemax (7)</li> </ul>			
► ⊕ pr			
r 🐵 tvgrac			
+ -@-paisie			
~ + # #10			
Bil Carattone			
<ul> <li>Ng Domains</li> </ul>			
<ul> <li>B FTG Configurations</li> </ul>			
<ul> <li>MTS Dictionaries</li> </ul>			
<ul> <li>AuFTS Paraera</li> </ul>			
<ul> <li>IEETS Temprateo</li> </ul>			
In the second			
In Functions			
Materialized Views			
<ul> <li>Containing</li> </ul>			
> 1.1Sequetoes			
- 20 faties (6)			
+ Itti ge, stations			
+ managang_ge			
<ul> <li>Elf-katalog_stoff</li> </ul>			
<ul> <li>III) measurements.</li> </ul>			
<ul> <li>III) meassfelle</li> </ul>			
<ul> <li>Emmessiwert</li> </ul>			
> 101 Trigger Functions			
> 10 Tapes			
- 10 Yiews (7)			
<ul> <li>groupity_station_result</li> </ul>			
e 🚟 ratuat			
- Titlat.geon			
		image 2- PGadmin	

Watching the below videos to understand how we can create schemas and tables in the PostgreSQL database.



Create a database and schema based on the above video.

# 2.3 Data Engineering

# 2.3.1 Downloading the Data

In the first step, The data must be downloaded from here. To complete the process, download and extract the initial zip file, which contains four CSV files and one set of instructions. Refer to image 3 for guidance on selecting the appropriate zip file.

Car 🔜 UNI 🔜 Hame 🔝 Cyber 🔥 Drojski far iwwybs 💽 Arangaaasseet 4	🔅 Debbil desentregen 🚺 Überbick für Stude	BM92 peine 🖬 Betranishe An	n
		Information und Nordrheim West	Tachsia alise
OpenGeocata.NRW 3 Dryges		(J.4	SCH 45 XML
Grundwassermessstellen NRW			
Linestinformation: Date: Date: states unter ter Deteritance Des     Detersatizations/busic_B_Doperty.pht_mail.pp     Meladatan thr CP Despend XRW	dicitions - Zero - Venitor 2.9. Jack Nutzing in ohr	n Einschränkungen nörr Sedingunge	en Andineig
Daten der Grundwassermessstellen in NRW als CSV			
Liaten der Grundwassermessstellen in Nikw als GGV			
Daten der Grundwassermessstellen in NRW als CSV		Letzte Änderung	Dataigroile
		Letzte Änderung 25-10.2021 08-48.00	Dateigröße 41.7 MB
Datai		and the second se	
Detai @ Openthypted_gav-menadeles-mesoweris_EPS625602_GDV.op	nbank	25-10-2021-00-48-00	41.7 MB
Datai ClosentrygetsG_gav-messaciellan-messawarka_RPSG28002_CBV.sp @ OpentrygetsG_gav-messaritant_RPSG28002_CBV.sp	nbank	25-10-2021-00-48-00	41.7 MB
Detai DenthypteC_gavmentelen-messwerte_EPS628022_CEV.zp (d) OpenhypteC_geveneentend_EPS628022_CEV.zp Daten der Grundwassermessstellen in NRW als Sqilte Date	nbank	29-10-2021 08-46-00 29-10-2021 08-49-08	41.7 MB 100.4 MB
Detai Detai DetainypteC_gaverassetiles-messwerks_EPS628022_CEV.ep (d) OpenHypteC_gaveseentand_EPS628032_CEV.ep Deten der Grundwassermessstellen in NRW als Sqilte Date Detai	nbank	25.10.2021 08-49-00 29.10.2021 08-49-00 Letzte Anderung	41.7 MB 100.4 MB Detelgrolle
Detai Detai DetaingsteG_gav-messatelen-messwerks_EPS628022_CBV.ap CoverHypteG_gav-researchard_EPS628032_CBV.ap Detan der Grundwassermessstellen in NRW als Sollte Detai Detai Detai CoperHypteG_gav-messatelen-messwerke_EPS025632_Solte.ap		28:10.2021 08:48:00 28:10.2021 08:49:00 Lettle Antisrung 28:10.2021 09:46:20	41.7 MB 300.4 MB Detelgroffie 86.8 MB
Datai         @ OpenHypteC.gx+measurates-measurate.EPS622002_CDV.zp           @ OpenHypteC.gx+measurates.text         EPS622002_CDV.zp           Daten der Grundwassermessstellen in NRW als Sqilte Date         Daten           Datei         @ OpenHypteC.gx+measurates.enswerte_EPS622832_Sqite.zp           @ OpenHypteC.gx+measurates.texter.EPS622832_Sqite.zp         @ OpenHypteC.gx+measurates.texter.EPS622832_Sqite.zp		28:10.2021 08:48:00 28:10.2021 08:49:00 Lettle Antisrung 28:10.2021 09:46:20	41.7 MB 300.4 MB Detelgroffie 86.8 MB

After the above zip file has been extracted, the four CSV files and the instruction file can be considered, with a strong recommendation to read the instruction file first.

# 2.3.2 Python

Python is a high-level, interpreted, and general-purpose programming language known for its simplicity and readability. It was created by Guido van Rossum and first released in 1991. Python emphasizes code readability and has a design philosophy that emphasizes clear, concise syntax, making it easier to write and understand code. Python is used in several ways such as:


- AI and machine learning
- Data analytics
- Data visualisation
- Programming applications

In this project, we have used Python for data engineering, data pre-processing, and data analysis. Jupyter Notebook is used in this project to write Python codes. The Jupyter Notebook is an opensource web application that data scientists can simply write the code for and make it easier to document. Simply, we can combine Python codes, text, images, comments, and the result of the codes on the same page. The below image shows how code, text, and the result of the code can be seen on a single page.

100	1.44	100 C		and the second	and an other	and and						Sec. Sec. Sec. Sec. Sec. Sec. Sec. Sec.	Innuna		
File	Edit	View II	rsert Cell	Kemel V	Vidgets	Help						Tounted	Python 3 O		
	+ 3< 4	b 16 🕈	🔶 🕨 Run	E C »	Marido	wii 🔅	( 100								
		Don't forg	the file et to add the "de						, so we need	to assign it.					
	In [59]:	df = pd. df.head(	read_csv(gw_s )	tation_pfna	me, dei	imiter=	';', header=	infer')			Python Code			_	
		df.head(		name	me, del •32		gw_stockwerk	anes de	gemeinde_id	-		, beobachtung_w	vasserstand	-	
		df.head(	)	-	•32	n32		anes de	gemeinde_id 05111000	-			vasserstand	٦.	
		df.head(	) messstelle_id	name	•32 343064	n32 5578019	gw_stockwerk	anes de		gwhorizont_id NaN	gwhorizont		vasserstand	₽	
		df.head( 	messstelle_id 32505929 10448746	name UWB-Ddorf 01285	•32 343064 292077	<b>n32</b> 5578019 5645349	gw_stockwerk 1.0	grundstueck	05111000	gwhorizont_id NaN	gwhorizont NaN		vasserstand	₽	


# 2.3.3 Anaconda

Anaconda is an open-source distribution for python and R. It is used for data science, machine learning, deep learning, etc. With the availability of more than 300 libraries for data science, it becomes fairly optimal for any programmer to work on anaconda for data science Anaconda is used in this project. An environment on Anaconda has been created to install all the packages needed for this project.

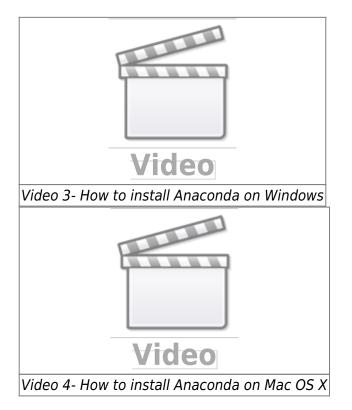

**Environment in Anaconda:** A conda environment is a directory that contains a specific collection of conda packages that are used in the project.

**How to create Conda environment:** The below video shows how to create a Conda environment, how to activate it, how to install different packages on the environment and how to deactivate the environment.



**Python packages:** Python packages are collections of modules that provide additional functionality and tools to extend the capabilities of the Python programming language. Packages are typically distributed and installed using package managers such as pip (the default package manager for Python) or conda.

To get more details about conda environment, I highly recommend visiting the below webpage.

https://towardsdatascience.com/manage-your-python-virtual-environment-with-conda-a0d2934d5195

**openhype environment:** For this project, an "openhype" environment was created to install all the required packages. This environment ensures that all the necessary dependencies are properly installed and configured.

Several packages are related to data science but in this project, we have used the below packages. There are two ways to install the below packages:

**install a package manually:** In this way you need to install each package manually into openhype environment by the command prompt.

• **pandas:** Pandas is a popular open-source Python library for data manipulation and analysis. It provides easy-to-use data structures, such as DataFrame, Series, and Index, that are designed to handle structured data efficiently.

In this project, pandas was utilized to read the CSV files, clean the data, and perform data engineering tasks. To install Pandas, execute the following Python code within the openhype environment in the Anaconda prompt:

conda install pandas

• **sqlalchemy:** SQLAlchemy is a popular open-source SQL toolkit and Object-Relational Mapping (ORM) library for Python. It provides a set of high-level APIs that allow developers to interact with relational databases using Python code.

conda install sqlalchemy

• **psycopg2:** Psycopg2 is a PostgreSQL adapter for Python. It provides a Python interface for interacting with PostgreSQL databases, allowing developers to connect to a PostgreSQL database server, execute SQL queries, and perform database operations using Python code.

conda install psycopg2

• geopandas: Geopandas is an open-source Python library built on top of Pandas and other

geospatial libraries. It extends the capabilities of Pandas by adding support for geospatial data, enabling users to work with spatial data in a tabular format.

conda install --channel conda-forge geopandas


Certain packages require the specification of a channel for installation. This is why the above code includes the channel specification to ensure the correct installation.

• **jupyter notebook:** Jupyter Notebook is an open-source web-based interactive computing environment that allows users to create and share documents containing live code, visualizations, explanatory text, and more. It supports various programming languages, including Python, R, and Julia.

conda install jupyter notebook

To ensure the successful installation of all the aforementioned packages, it is crucial to install them within the openhype environment using the Anaconda prompt.

**Load all the packages into the environment by a YAML file:** To streamline the installation process for all the required packages in this project, it is recommended to create an environment named "Openhype" and load a YAML file containing the package specifications. The contents of the "openhype.yml" file, as shown in the image below, encompass all the necessary packages.

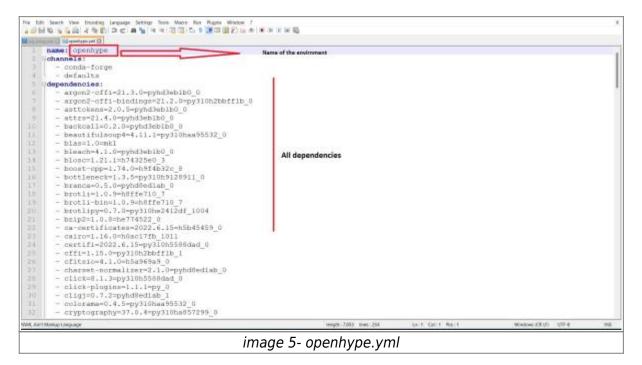

The following code allows you to create an environment based on the yml file. Keep in mind that the YAML file should be in the same directory as your Anaconda installation. If the file is located elsewhere, you will need to provide the full path to the file in the code. openhype.yml can be found from here

```
conda env create -f openhype.yml
```

How to create a yml file for the environment: With the below code you can export the yml file from the existing environment.

conda env export > openhype.yml

Since the four CSV files have been downloaded in the previous chapter, it is time to read the CSV files and initiate the cleaning process to make them ready for importation into our database.

Refer to the code section in our Notebook for more information Github (the below image).

Search or jump to	Pull requests issues Marketplace E	plare		Q +•	6.
sina7272 / LANUV_Groundwater	Paste .			St. No. 🙁 Uweakin () + 👘 (+ 👘 🚔 Stanned ()	
O Code 💮 Issoer 👘 Pull requests	🔆 Actions 🔄 Projects 🗇 Wiki	© Security ⊨ Insights © Settings			
	P man - P threach & G tags		Go to file Add file - Code -	About (8	
	ana7272 update		arssells 2 heurs ago 🔞 22 commite	Ground water in NRW	
	apyrik, checkpoints			\$ 1 me	
	🐚 Natebook				
	tata data				
	<b>a</b> 994			Relation	
	D gtatributus				
	D README.md				
	README.md			Packages	
		2014/1012		No participat pathology	
	LANUV_Groundv	vater			
	Ground water in NRW			Languages	
				Auguster Proteinenii 51.75      P (200, 5:75)	
	) e 2023 General III 1	many Security Status Data Ca	duction in the head	Reg Rect	
		image	6- Github		

There below four notebooks should be run separately, in order to import data into the database.

• import\_gemeinde.ipynb:

In this notebook, we will import the data of all geminde into the database.

• import\_katalog\_stoff.ipynb:

In this notebook, we will import the data of all the catalogue substances into the database.

• import\_messstelle.ipynb:

In this notebook, we will import the data of all stations into the database.

• import\_messwert.ipynb:

In this notebook, we will import the data of all values into the database.

### 2.4 Observation Data in the Database

After successfully downloading, cleaning, and importing the data into the database in the previous section, it is now time to examine the data within the database. Since we are working with a PostgreSQL database, we can utilize SQL commands to retrieve and analyze the data. Let's run some basic SQL commands to gain insights into the data.

To view our tables, we can use the following code. It selects all the columns from the "hygrisc" schema, which contains our tables. We limit the output to the first 100 rows to avoid overwhelming results.

select \* from hygrisc.messwert limit 100;

Image 7 illustrates the outcome of the aforementioned command executed in PGAdmin. It displays the resulting data obtained from the execution of the provided SQL command.

	5 III Ta Q	Dashb	oard Proj	perties SC	L Stat	istics Dep	endencies	Deper	ndents		etwas/etwa	sizelwa	17										
X 🚱 Domains		8		I Q			8 2'-	т		Nole	nit. 🛩		- 4		- 15	6	dr I	£	18.×				
ETS Configure		6 .	was/etwood	Selwas +	1	1000									-								
FTS Dictioner	ries	Reading and	Editor Qu																	cratch P	and a		
> An FTS Parsers																			1	ciarci r	P.C.		
<ul> <li>FTS Template</li> <li>Honsign Table</li> </ul>		1	elect =	from sina	. nessae	ert limit	100;																
<ul> <li>b) Functions</li> </ul>	50 																						
> Materialized \	Views																						
> () Procedures																							
<ul> <li>Cr Sequences</li> </ul>																							
🛩 🛅 Tableo (6)																							
⇒ 🛅 gw_statio	ris.																						
> 🖽 katalog.g	e																						
🔉 🖽 katalog_at																							
measurem																							
> 📑 mesisteli																							
> 🖂 messwert																							
						No. 10 Contractor																	
X by Trigger Funct	tors	Data O	htput Exc	ilain Mes	19398	NOULCHIOUI																	
Этрена	5075	Data O						1	the Party				and the second		-	autorio b	and the second se		Restinger man	-	mananthill	manuel	1
> 😨 Турна ~ 🧱 Viewa (7)		-	sLor (PK)bigint	Aain Mes messate bagint		pha.id		1	w, Note	1	probesgut sist	/ mes	ergebeias le precision	1	messer tixt	gebnia,3	inveis	/	bestimmungsg double prectain	prentae on	/ massesthalt	/ trensverfa	abram.
Этрена		-	sLer	<ul> <li>messate bagint</li> </ul>	au /	, piane ,	, datam_pn date		agen	-17	probesgut sint Grundwasser	/ mes	se precision	1		gitnis,)	inveis	1	Bestimmungsg double precisie		<ul> <li>massestheit text</li> <li>mg/l</li> </ul>	/ trenswerfa	
> C Types > Venue (7) > groupby_s	station_result	-	sl.or [PK]bigint	<ul> <li>messate</li> <li>bigmt</li> </ul>	109900271	pralid a	datum, pri date 1992-05-21		agen. 1	244 (	893	/ mes	ie precision		[12.0]	gebnia_8	inveis	'	Bestimmungsg double precisio	3	and a second	004	filter
> Types Weens (7) > Groupby.s > retrat	station,result		sl.or [PK] bigint 122890	Messeta bagint 151	199002710 299002710 289002810	pre_id text 0 3/1992/16	datum_pn date 1992-05-21 1994-03-29		1	244 (	ann Grundwasser	/ mes (0)/	le pecisión 1	05.248	(n.i) (n.i)	gebnis,ð	invelle	'	bestimmungsg double prectain	1	high (jun)	Membran	fiher filter
Types     Weess (7)     Weess (7)     intrat     intrat.geo     Ficular     Ecolum     Ecolum     Ecolum	station, result on	1 2	sLer [PK]bigint 122090 122090	messate     tagint	299002714 289002714 289002914 8030029	<ul> <li>pna.id hext</li> <li>3/1992/16</li> <li>3/1994/16</li> </ul>	datum.pn date 1992-05-21 1994-03-29 1993-01-11		1 1 1	244 ( 244 ( 244 (	ann Grundwasser Grundwasser	/ mes	le pectaton 1	06.248 61.978	(mail) (mail) (mail)	gebnic.3	inweis	,	bestimmunging couble precisio		figer (luc) figer (luc)	Membran	fiher filter filter
Types	station, result on	1 2 3	<b>sLor</b> [PK]bigint 122090 122090 122090	messata     tagint     163     172	6.14 209002710 209002010 8030030 8030030	<ul> <li>preuid</li> <li>hixt</li> <li>3/1992/16.</li> <li>3/1993/16.</li> </ul>	datum.pn date 1992-05-21 1994-05-29 1995-01-11 1992-11-02		1 1 1	244 ( 244 ( 244 ( 244 (	ann Grundwasser Grundwasser Grundwasser	/ mes	1	06.248 d1.978 3.0989	(m) (m) (m) (m) (m) (m)	getinic_3	inveis	,	Bestimmunging double precisio		indi ingi ingi ingi ingi	Membrari Membrari Membrari	fiher fiher fiher fiher
Prove     Venes (7)     Venes (7)     Venes (7)     venes (7)     retust     venes (7)     ven(	station_result con ons	4 1 2 3 4	sLer [P4]bigint 122090 122090 122090 122090	messsta bigint     10     1	209002710 2090022710 209002010 80300000 80300000	<ul> <li>preuid</li> <li>text</li> <li>3/1992/16</li> <li>3/1993/16</li> <li>3/1992/16</li> </ul>	datam.pn date 1992-05-21 1994-03-29 1993-01-11 1992-11-02 1993-12-22		1 1 1 1 1	244 ( 244 ( 244 ( 244 ( 244 (	ann Grundwasser Grundwasser Grundwasser Grundwasser	/ mes	1 1 2 3	05.249 61.978 3.0989 25777	(mir) (mir) (mir) (mir) (mir) (mir)	gabria.3	inviti.	'	Sestimmungeg Couble prechin		inali mgi inali mgi inali mgi inali mgi	Membran Membran Membran	the film film film film
Types     Venes(7)     Venes(7)     Groupbyz     fritut_poo     Ficture     Ficture     Sector     Sector	station_result con ons	4 7 3 4 5	9Lav (PK)bigint 122890 122890 122890 122890 122890	<ul> <li>messetta lagint</li> <li>193</li> <li>1953</li> <li>1953</li> <li>1953</li> <li>1953</li> <li>1953</li> <li>1954</li> <li>1954<td>269002710 2890022710 803002070 80300300 80300300 80300301</td><td>phajid feat 3/1992/16. 4/1994/16. 7/1993/16. 3/1992/16. 0//1993/16.</td><td>datar.ph date 1992-05-21 1994-03-29 1993-01-11 1992-11-02 1993-12-22 1993-04-21</td><td></td><td>1 1 1 1 1</td><td>244 ( 244 ( 244 ( 244 ( 244 ( 244 ( 244 (</td><td>ann Grundwasser Grundwasser Grundwasser Grundwasser</td><td>/ mes dout</td><td>1 2 3 1</td><td>05.248 61.978 3.0989 25777 .05403</td><td>(nur) (nur) (nur) (nur) (nur) (nur)</td><td>gebrie.3</td><td>inveis</td><td>'</td><td>bestimmungsg Guldle prectain</td><td></td><td>inuli mgri inuli mgri inuli mgri inuli mgri inuli mgri</td><td>Membran Membran Membran Membran</td><td>filter filter filter filter filter</td></li></ul>	269002710 2890022710 803002070 80300300 80300300 80300301	phajid feat 3/1992/16. 4/1994/16. 7/1993/16. 3/1992/16. 0//1993/16.	datar.ph date 1992-05-21 1994-03-29 1993-01-11 1992-11-02 1993-12-22 1993-04-21		1 1 1 1 1	244 ( 244 ( 244 ( 244 ( 244 ( 244 ( 244 (	ann Grundwasser Grundwasser Grundwasser Grundwasser	/ mes dout	1 2 3 1	05.248 61.978 3.0989 25777 .05403	(nur) (nur) (nur) (nur) (nur) (nur)	gebrie.3	inveis	'	bestimmungsg Guldle prectain		inuli mgri inuli mgri inuli mgri inuli mgri inuli mgri	Membran Membran Membran Membran	filter filter filter filter filter
<ul> <li>Types</li> <li>Venes (7)</li> <li>groupby, t</li> <li>retuit</li> <li>retuit</li> <li>retuit</li> <li>retuit</li> <li>retuit</li> <li>temp</li> <li>suffat, peo</li> <li>suffat, peo</li> <li>suffat, peo</li> <li>temp</li> <li>temp</li> <li>temp</li> </ul>	station_result con ons	1 2 3 4 5 6 7	sl.sv [PK]bigint 122890 122890 122890 122890 122890 122890 122890	<ul> <li>messate bagint</li> <li>163</li> <li>172</li> <li>177</li> <li>177</li> <li>179</li> <li>181</li> <li>197</li> <li>197</li> </ul>	1099002714 2099002714 2099002019 80390030 80390030 80390030 80390030 80390035	<ul> <li>pha.id host</li> <li>3/1992/16.</li> <li>3/1992/16.</li> <li>3/1993/16.</li> <li>3/1992/16.</li> <li>3/1992/16.</li> <li>3/1992/16.</li> <li>3/1992/16.</li> <li>3/1993/16.</li> </ul>	datum_pri date 1992-05-21 1994-05-29 1993-01-11 1992-11-02 1993-12-22 1993-12-22 1993-04-21 1993-07-19	-	1 1 1 1 1 1	244 ( 244 ( 244 ( 244 ( 244 ( 244 ( 244 ( 244 (	ann Grundwasser Grundwasser Grundwasser Grundwasser Grundwasser Grundwasser	/ mes doz	1 2 3 1 1	06.248 61.978 3.0989 25777 05403 1.0675 06.248	(m) (m) (m) (m) (m) (m) (m) (m)	gebria_8	inveis	,	bestimmungsg double precisio		tigen (jun) ngen (jun) ngen (jun) ngen (jun) ngen (jun) ngen (jun) ngen (jun)	Membran Membran Membran Membran Membran	the film film film film film film
<ul> <li>Types</li> <li>Vress(7)</li> <li>groups(7)</li> <li>groups(7)</li> <li>metad</li> <li>metad</li> <li>ficial peop</li> <li>ficial p</li></ul>	station_result con ons	1 2 3 4 5 6	sl.sv [PK]bigint 122890 122890 122890 122890 122890 122890 122890 122890 122890	<ul> <li>messate bigint</li> <li>163</li> <li>1672</li> <li>1679</li> <li>1670</li> <li>1671</li> <li>1670</li> <li>1670<td>6030036 8030030 8030030 8030030 8030030 8030030 8030036 8030036</td><td>pha.id hert 3/1992/16. 3/1993/16. 3/1993/16. 3/1992/16. 3/1992/16. 3/1993/16. 3/1993/16. 3/1993/16. 3/1092/16.</td><td>datum_pri date 1992-05-21 1993-05-21 1993-05-21 1993-05-22 1993-12-22 1993-12-22 1993-12-22 1993-04-21 1993-05-10</td><td></td><td>1 1 1 1 1 1 1</td><td>244 ( 244 ( 244 ( 244 ( 244 ( 244 ( 244 ( 244 (</td><td>aux Grundwasser Grundwasser Grundwasser Grundwasser Grundwasser Grundwasser Grundwasser</td><td>/ mes dout</td><td>1 2 3 1 1</td><td>06.249 61.978 3.0989 25777 05403 1.0675 06.249 53.124</td><td>1001 (1001) (1001) (1001) (1001) (1001) (1001) (1001)</td><td>gebrie.3</td><td></td><td></td><td>couble precise</td><td></td><td>tion fight (juid fight (juid fight (juid) fight (juid) fight (juid) fight (juid)</td><td>Menibrari Menibrari Menibrari Menibrari Menibrari Menibrari</td><td>filter filter filter filter filter filter</td></li></ul>	6030036 8030030 8030030 8030030 8030030 8030030 8030036 8030036	pha.id hert 3/1992/16. 3/1993/16. 3/1993/16. 3/1992/16. 3/1992/16. 3/1993/16. 3/1993/16. 3/1993/16. 3/1092/16.	datum_pri date 1992-05-21 1993-05-21 1993-05-21 1993-05-22 1993-12-22 1993-12-22 1993-12-22 1993-04-21 1993-05-10		1 1 1 1 1 1 1	244 ( 244 ( 244 ( 244 ( 244 ( 244 ( 244 ( 244 (	aux Grundwasser Grundwasser Grundwasser Grundwasser Grundwasser Grundwasser Grundwasser	/ mes dout	1 2 3 1 1	06.249 61.978 3.0989 25777 05403 1.0675 06.249 53.124	1001 (1001) (1001) (1001) (1001) (1001) (1001) (1001)	gebrie.3			couble precise		tion fight (juid fight (juid fight (juid) fight (juid) fight (juid) fight (juid)	Menibrari Menibrari Menibrari Menibrari Menibrari Menibrari	filter filter filter filter filter filter
<ul> <li>Types</li> <li>Wrenst (7)</li> <li>groupby,t</li> <li>motion</li> <li>motion</li> <li>mitian</li> <li>mitian</li> <li>mitian</li> <li>groupby,t</li> <li>Transit</li> <li>groupby,t</li> <li>Transit</li> <li>groupby,t</li> <li>Transit</li> <li>groupby,t</li> <li>Transit</li> <li>groupby,t</li> <li>transit</li> <li>temp</li> <li>temp</li> </ul>	station_result con ons	1 2 3 4 5 6 7	sl.sv [PK]bigint 122890 122890 122890 122890 122890 122890 122890	<ul> <li>messate bigint</li> <li>163</li> <li>1672</li> <li>1679</li> <li>1670</li> <li>1671</li> <li>1670</li> <li>1670<td>6030036 8030030 8030030 8030030 8030030 8030030 8030036 8030036</td><td><ul> <li>pha.id host</li> <li>3/1992/16.</li> <li>3/1992/16.</li> <li>3/1993/16.</li> <li>3/1992/16.</li> <li>3/1992/16.</li> <li>3/1992/16.</li> <li>3/1992/16.</li> <li>3/1993/16.</li> </ul></td><td>datum_pri date 1992-05-21 1993-05-21 1993-05-21 1993-05-22 1993-12-22 1993-12-22 1993-12-22 1993-04-21 1993-05-10</td><td></td><td>1 1 1 1 1 1 1</td><td>244 ( 244 ( 244 ( 244 ( 244 ( 244 ( 244 ( 244 (</td><td>aux Grundwasser Grundwasser Grundwasser Grundwasser Grundwasser Grundwasser</td><td>/ mes dout</td><td>1 2 3 1 1</td><td>06.248 61.978 3.0989 25777 05403 1.0675 06.248</td><td>1001 (1001) (1001) (1001) (1001) (1001) (1001) (1001)</td><td>gebrie_8</td><td></td><td></td><td>couble precise</td><td></td><td>tigen (jun) ngen (jun) ngen (jun) ngen (jun) ngen (jun) ngen (jun) ngen (jun)</td><td>Menibrari Menibrari Menibrari Menibrari Menibrari Menibrari</td><td>filter filter filter filter filter filter filter</td></li></ul>	6030036 8030030 8030030 8030030 8030030 8030030 8030036 8030036	<ul> <li>pha.id host</li> <li>3/1992/16.</li> <li>3/1992/16.</li> <li>3/1993/16.</li> <li>3/1992/16.</li> <li>3/1992/16.</li> <li>3/1992/16.</li> <li>3/1992/16.</li> <li>3/1993/16.</li> </ul>	datum_pri date 1992-05-21 1993-05-21 1993-05-21 1993-05-22 1993-12-22 1993-12-22 1993-12-22 1993-04-21 1993-05-10		1 1 1 1 1 1 1	244 ( 244 ( 244 ( 244 ( 244 ( 244 ( 244 ( 244 (	aux Grundwasser Grundwasser Grundwasser Grundwasser Grundwasser Grundwasser	/ mes dout	1 2 3 1 1	06.248 61.978 3.0989 25777 05403 1.0675 06.248	1001 (1001) (1001) (1001) (1001) (1001) (1001) (1001)	gebrie_8			couble precise		tigen (jun) ngen (jun) ngen (jun) ngen (jun) ngen (jun) ngen (jun) ngen (jun)	Menibrari Menibrari Menibrari Menibrari Menibrari Menibrari	filter filter filter filter filter filter filter

image 7- messwert table in databse

Now with the above SQL command, we are able to see the other three tables that we have (The below codes).

select \* from hygrisc.messstelle limit 100;

select \* from hygrisc.katalog\_stoff limit 100;

select \* from hygrisc.katalog\_ge limit 100;

Now we want to see more details for our tables and we will run the below codes.

**Count the rows of each table:** With the below code, we can see how many rows we have in each table.

select count (\*) from hygrisc.messwert;

select count (\*) from hygrisc.messstelle;

**Filter the data based on Nitrate only:** To determine the substance number of Nitrate, we need to retrieve the corresponding information from the database.

select \* from hygrisc.katalog\_stoff where name like 'Ni%';

<ul> <li>op palled</li> </ul>	III 🐃 Q. Dashboard Properties SQL Statistics	Dependencies Dependents 🗿 elsest/elsest_belvest*		
	8 8 8 - II Q - # - 1	5 8 2" T - home - 8 5 - 5 8 - 5 8 4.	4 8-	
+ (Colations	S chem/shees@chem +			
<ul> <li>Re Domano.</li> </ul>	Query Elifeir Query History		Scretch Part	
> (0.FTS Configurations			and decision and a	
+ In FTS Dictionaries	1 select + from size, sersion, stor	f where name Like [N:5]		
<ul> <li>Av PTS/Pactors</li> </ul>				
+ TS Templates				
<ul> <li>IIII Foreign Tables</li> </ul>				
INFLUENCE      Materialized Veves				
<ul> <li>Concedures</li> </ul>				
+ 1./Sequences				
- Im Rables (%)				
<ul> <li>III gs_stations</li> </ul>				
<ul> <li>Etherwise.ge</li> </ul>	6			
> III katalog_stuff				
Hiti Medalukarmanda				
* mirrenniele				
<ul> <li>III messivet</li> <li>III Trigger Functions</li> </ul>				
* D Types				
- Diviews (7)	Dete Output Explain Mesoages Notifice			
# groupby_station_result				
+ mittai	and a new A	beschreibung dis.M and text		
- initiat_peom	1 1143 Noo	put 7446451		
+ Columns	2 1188 195M	1-1E 746-616		
+ 2+ Triggers	1 1244 Minut	NO NO DE CONTRACTO		
	4 1240 Istue Occlusoff	INC INC.		
	5 T248 Marriel	hel hel		
+ 🧱 naiftat.				
	6 1247 term Stickenst	N. N.		
+ mattat + mattat_peom	A CONTRACT OF A			
<ul> <li>mutat</li> <li>mutat_secon</li> <li>mutat_secon</li> <li>mutat_secon</li> <li>mutat_secon</li> <li>mutat_secon</li> <li>mutat_secon</li> </ul>	6 1247 term Stickenst			
	6 1247 Nem Socient 7 1967 Nem socient	put put		
+ ■ suitat + ■ tope: John + ● tope: John + ● tope: John + ● tope: John	6 1247 httm://docketurff 7 1967 httm://www.interfeetade 8 2299 Netrobercont	judi seasa		
	6 1247 term Socient 7 1947 Networkshof Testelle 8 2299 Networkshof 9 2384 Networks	(m) (m) (m) (0.000 (m) (100-000		
	6         1247 tem-Dickenuf           7         1967 heresenet           8         2299 heresenet           9         1264 heresenet           9         1264 heresenet           10         2567 heresenet(MTA)	2-00 (2-00) 2-00 (200-20- 2-00) (200-20- 2-00) (200-20- 2-00) (200-20-		
	0         1347         Nem Stationard           7         166         Nettherward           8         2009         Nettherward           9         2004         Nettherward           10         2004         Nettherward           10         2005         Nettherward           11         2008         Nettherward	2001 2001 2003 2000 200 2003 2000 2000 2004 2000 200 2005 2000 200		

According to the information presented in "Image 8," the substance number (stoff\_nr) of Nitrate is **1244** 

select \* from hygrisc.messwert where stoff\_nr = '1244';

Now we can filter the messwert table based on Nitrate. In this step, We can save this new table as a new "view".

**What is a view:** a view is a virtual table that is derived from one or more existing tables or other views. A view does not store data physically but rather provides a way to present data from underlying tables in a structured and organized manner. It acts as a predefined query that can be used to retrieve and manipulate data. The below code creates views:

```
create view hygrisc.nitrat as (select * from hygrisc.messwert where stoff_nr
= '1244');
```

We now have a "nitrat" view, which can be accessed just like a table using the following code. This view is filter of our messwert table based on "1244" which is "Nitrate"

select \* from hygrisc.nitrat ;


**Group by the two tables:** the Group by clause is used to group rows based on one or more columns in a table. When working with two tables, you can perform a GROUP BY operation to group the data based on common values from both tables. In this section, we want to group by our two tables (messwert and messstelle) only in Nitrate. These two tables have a column **messstelle\_id** which means station id.

```
select messstelle_id, count(*) from hygrisc.messwert where stoff_nr =
'1244' group by messstelle_id;
```

+ W DUDHC		8 - 10	Q - # - 1	S B W T - she v B P - S D - S S d - A R-		
<ul> <li>Optimi</li> <li>EL Collections</li> </ul>	of stan	o'elean@elean -	Part of the local division of the local divi			
+ He Domann		Cuery Hator				Scratch Paul
+ D.FTS Configurations						and an or a set of the
+ (N. F75 Dictionates)	1 sel	ect mesostalle	, 1d, count +	from sine.necourt she's stoff,or = '1244' group by messatelle_id		
+ Av FTS Parsers						
+ 💭 FTS Templater						
<ul> <li>III Foreign Tables</li> </ul>						
+ No functions						
+ 😻 Materia izeri. Veivez						
<ul> <li>UProcedures</li> </ul>						
<ul> <li>A.3 Seduences</li> </ul>						
- III Tatsen (0)						
<ul> <li>III gec_stations</li> </ul>	1.1					
<ul> <li>Making ge</li> </ul>						
> micatalog_stoff						
<ul> <li>III measurements</li> </ul>						
<ul> <li>III restatulie</li> </ul>						
Threasured     Thoose Functions						
+ Types						
- Views (7)	10000	10 12 13 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	States and			
<ul> <li>Brooty_station_vecuti</li> </ul>	CARA DUC	at Explain N	easiges Notifice	59TI -		
e cristrat		essyste_id A	A Here			
- Criticat_peom	4.50	10131310	sper 34			
+ 🛅 Column						
e 💼 Rulea	2	18290408				
+ 2+ Tiggen		18290411	28			
> instat		(8200691	- 59			
s motor_peore	- A.S.	10200710				
> Torip	4	18280808	20			
s 🔜 terp2	- T -	103009402	1.12			
<ul> <li>(e) tiget</li> </ul>		10331039	- 14			
<ul> <li>Wittger_data</li> </ul>		18201117	40			
<ul> <li>(i) probability</li> </ul>	18	10201242	41			
> Tripostgree	2 H 1	(8281294	28			
<ul> <li>Stemperatur, positigas</li> <li>Stemperatura</li> </ul>	12	10201300	28			
Ga Login/Umap Roles	13	18291312	42		L	and de la constant and an
Tablespeces	14	10201348	-11		✓ Buccasa	afuñy nan Total query turtime: \$71 maes: 2632 novo affecto

Image 9 shows that each station id has how many single measurements for the Nitrate only. I highly recommend opening the below website to get more deep into how "group by" works and how we can use it.

https://www.w3schools.com/sql/sql\_orderby.asp



#### Maximum date in nitrat table:

select \* from hygrisc.nitrat where datum\_pn = (select max(datum\_pn) from hygrisc.nitrat); 2024/05/19 08:16

Converse      Source		Cashboard Properties BQL Statistics Dependencies Dependences 🖀 etholositivousjointus."		
<ul> <li>Catalon</li> <li>Catalon</li></ul>		5 5 6 - 2 0 - 5 - 5 E 2 T - 1 - 5 - 5 - 5 - 5 - 5 - 5 - 5 - 5 - 5		
• 0.00000000000000000000000000000000000		A International Statement		
<pre>     Int Configurations     Int Configur</pre>			Scratch Pad	
<pre>     Parting for and in the second seco</pre>	<ul> <li>Q FTS Configurations</li> </ul>			
In The The Presence of the		1 setect + from sine.nitrat effere detai_pn = (setect max/deta_pn) from sine.nitrat)		
• Characterises				
<ul> <li>Ukanioa</li> <li>Ukanioa</li></ul>				
<ul> <li>Waterward Weele <ul> <li>Waterward Weele <li>Stepsace <li>Waterward Weele <li>Stepsace <li>Stepsace <li>Stepsace <li>Stepsace <li>Stepsace <li>Stepsace <li>Stepsace <li>Stepsace <li>Stepsace <li>Stepsace <li>Stepsace <li>Stepsace <li>Stepsace <li>Stepsace <li>Stepsace <li>Stepsace <li>Stepsace <li>Stepsace <li>Stepsace <li>Stepsace <li>Stepsace </li> </li></li></li></li></li></li></li></li></li></li></li></li></li></li></li></li></li></li></li></li></li></li></li></ul> </li> </ul>				
<ul> <li>1) Processore 1) Second (1) 2) Second (1) 2) Second (1) 3) Second (1) 4) Secon</li></ul>				
<ul> <li>L'Assance</li> <li>L'Assance</li></ul>				
<pre>     file_returns     file_returns</pre>				
<ul> <li>a Urang_Laft</li> <li>b Urang_Laft</li> <li>c Ura</li></ul>	- 🛅 fabieo (fi)			
• Standy Justi • Streets Hite • Streets • State •				
Simple Factors     Simpl				
<ul> <li>Binessetsine</li> <li>Binessetsine</li> <li>Chiessensi</li> <li>Chiessensi<td></td><td></td><td></td><td></td></li></ul>				
• El mesoreti : • O Todes •				
• Stronge-Factors • Stronge				
Call Oxford (Table) Sector (Sector)     Call Oxford (Edual) Message's KatGodon:     Call Message's KatGod				
• Counter transmission and the second sec	> IC) Tusies			
Instruction of the second s		Cata Output Explain Messages Intifications		
		E.W , meanwish , pra.il , deur.ar , put.ar , potental , meanwaters.al , meanwaters.al , betterrurgayore , nameshel , terrurfater	, writing , vis of , lashert ,	strat_det
		A point " built " tet " also " pays " tet " and process " tet " adult process " tet " adult process	sed tax sed	1949
* ■ Musis     * ■ Avais		1 17721111 Halfettis bittlinis bittlinis bittlinis bittlinis	Rese Arguer HYORIE, 9	2012/09/28
Subfageen				
	+ 🧰 nartat			
<ul> <li>Barte2</li> <li>⊕ tupe:</li> <li>⇒ d-tupe; state</li> <li>&gt; d-tupe; state</li> <li>&gt; d'instruction</li> <li>&gt; d'instruction</li> <li>&gt; d'instruction</li> <li>&gt; d'instruction</li> <li>&gt; d'instruction</li> <li>&gt; d'instruction</li> </ul>				
formation     formation     formation     formation     formation     formation     formation     formation     formation				
> ∰printpres > ∰trenset_sortion > ∰trenset_sortion > ∰trenset_sortion				
<ul> <li>M thematic</li> <li>X (b) cognitive potential</li> </ul>				
x (bj.logit/kinupRole				
		Sector Se		
Image 10- Maximum of the date in the nitrat table	3 TABethares			

As we can see in Image 10, the maximum date is 2021-08-17

#### Minimum date in nitrat table:

select \* from hygrisc.nitrat where datum\_pn = (select min(datum\_pn) from hygrisc.nitrat);

ASH	🎟 🖡 🔍 Dashboard Properties 90k. Statistics: Dependencies: Dependencie	
<ul> <li>so patiet</li> </ul>	8 6 8 4 8 Q 4 8 4 5 8 8 7 1 4 100 4 8 9 4 8 4 5 5 4 4 8 4	
<ul> <li>Orientes</li> <li>Statistics</li> </ul>	S Johnan Johnangerinan -	
+ By Contains	Built mediate and the second	Solutch Piel
<ul> <li>D-PTS Contigurations</li> </ul>		300000100
FTS Dictionaries	3 select + free wine.nitrat.etere detum.pn - (select efn(detum.pn) free wine.nitrat);	
+ ##FTS Parsero		
<ul> <li>If Its Templetes</li> </ul>		
<ul> <li>IE Foreign Tables</li> <li>Ib Functions</li> </ul>		
<ul> <li>Contractions</li> <li>Contractions</li> <li>Contractions</li> </ul>		
> () Propertures		
+ 1.3 Sequences		
- 🦲 Tabiya (1)		
<ul> <li>migw_stations</li> </ul>		
<ul> <li>El valanto-ter</li> </ul>		
Plofe, governa 🛅 🔹		
<ul> <li>Immenuements</li> <li>Immenuefale</li> </ul>		
+ III measured		
> 89 Tripper Functione		
> C) Types		
- 📫 Vience (7)	Data Output Explain Messages Notifications	
+ 🔤 proupto_station_result	ity a meaning a proj a destar a soft a present a meaning to the best a between a sector a between a meaning to work the	e a vertainer a rot,ort a herkunft a alsaal,dar
+ etal	A shot when the way that is more burner and a second burner. But and	• test • test • test • zee
<ul> <li>E Oslamas</li> </ul>	1 1221403 Tollita 5191140 1221403 1244 Duelower 1.6499 Juli Juli 191 Desergene	a pull integrate purche
> ======		
+ 3+Trippers		
+ 🔛 mattat		
+ 🧱 suffat,geim		
+ terrar		
+ -to tax		
<ul> <li>Star, inta</li> </ul>		
+ fopology		
<ul> <li>Itt postgrep</li> </ul>		
> mit template_accepter.		
> III herrigo		
<ul> <li>-Ib.Logm/Group Roles</li> </ul>		
<ul> <li>M Tablespaces</li> </ul>		

As we can see in Image 11, the minimum date is 1951-04-30

**Create geometry column in messstelle table:** In this section, we want to create a geometry column from **e32** and **n32** columns from the messstelle table. With the below code, we are able to create a new column and we set the name as **geom** 

```
ALTER TABLE hygrisc.messstelle ADD COLUMN geom geometry(Point, 25832);
UPDATE hygrisc.messstelle SET geom = ST_SetSRID(ST_MakePoint(e32, n32),
```

#### 25832);

wser 🖪 🎹 🐄	Q Dashb	card Properties	s SQL Statistics Dr	ependencie	es Dependents 🖪	was/elwas@ietwas*							
> (8) public	8		Q - # - 1	8 2	f* T * 300	1	4.1		4. 1 E.				
~ 🛞 sina	65 0	lwas/ofwas@ielwa	is v		A Real Property lies					-			
<ul> <li>B+ Collations</li> </ul>	Discourse and	Editor Query Hi									cratch Pad		
<ul> <li>Domains</li> <li>TS Configurations</li> </ul>			sina.messatelle							-25	chalch Pag		
D), FTS Distortanties     AuFTS Paralem     Bit FTS Template     Up Fractions     Up Fractions     Up Functions     Up functions     Up functions     Up Totomotor     Up Totomotor     Tables 10													
> EP gw_stations > EP katalog_pe > EP katalog_stoff													
Autolog_pe     Matalog_stoff     Matalog_stoff     measurements		Julput Explain	Messages Notificatio										
<ul> <li>Matalog_pe</li> <li>Matalog_stoff</li> <li>measurements</li> <li>messatelie</li> </ul>		fiberiaenge.cm double precision	Messages Notificatio	A 80	abadachmasar,mm. xbie precision	Instantacher, ruhw, way     double precision		embaulaenga.cm double precision	duble precision	•	unterkante, filter, om dochte precision	4	geon geometry
S      Ataliog.pt     S     Mataliog.pt     M     mossurements     M     mossurements     mossureM     S     mossureM		filterlaenge_cm double precision	a sumpfrohrleenge.cm	A 80	suble precision	Natorischer, sube, seip double precision	indi	actions busication	oberkante, filter, o     double precision  [sull]	• •	double precision		
S ================================	iber 4	filterlaenge.cm double precision	sumpfishrisings_cm     double precision	A to	uble precision	<ul> <li>double precision</li> </ul>		autor precision	Others biscoster		double precision	but	georety georetry 01010000202864 01010000201864
Similar Station (Second Station)     Similar State     Similar State     Similar State     Similar State     Similar State     Similar State	sber 👔	filterlaenge.cm double precision	a sumpfrohrlaungscm     double precision	inulli	uble precision	double precision	(n.8)	sector precision	(pall	Ind	double precision	(huit) 9349	0101000020EB64
→ ⇒ Latalog_ge     → ⇒ Latalog_stoff     → = Netalog_stoff     → = measurements     → = measurefle     → = = measurefl	sber #4 media 1 Padeth	filterlaenge.cm double precision	sumpfrohrleunge.cm     double precision     linuli     1000	ab bb Burit Burit	suble precision	double precision null 110	(turi) (turi)	source become	2000	(nul) 10349	double precision     	(hul)	0101000020EB64 0101000020EB64
batalog_ge     betalog_stoff     betalog_st	sber #4 media 1 Padeth	filterlaenge.cm double precision	sumpfishrienge.cm     soulie precision     louil     louil     louil     louil	bull     bull	while precision	double precision null 110 yull	(1.1) (1.1) (1.1)	anne herona	(m) 5000 (m)	(nul) 10345 (nul)	double precision	(hul) 9349 (hul) 7505	0101000020EB6 0101000020EB6 0101000020EB6 0101000020EB6
Batalog_ge     Batalog_stroff     Batalog_stroff     If measurements     If measurements     If measurement     Working Functions     Trapes     Working_station_result     Batalog_stration_result     Batalog_stration_result     Batalog_stration_result     Controls	sber Nimedia I Padeth I Delbru	filterfaenge, om double precision	sampfich/senge_om double precision     suit     suit	louit Iouit Iouit Iouit Iouit	xible precision	double precision null 113 null	(ke) (ke) (ke) (ke)	and the second	[nul] 635	(nul) 10345 (nul) 7505	double precision	(hul) 9349 (hul) 7505 (hul)	0101000020E86- 0101000020E86- 0101000020E86-
Similar Section 2	sber Rimedia I Padeta I Datbru Sustemi	filterfaenge, om double precision	asing fickfluenge, cm     double precision     full     full     full     full     full	indi indi indi indi indi indi indi	uble precision	double precision aufi aufi aufi aufi aufi	(ke) (ke) (ke) (ke) (ke) (ke)	source provous	(mil) (mil) (mil) (mil) (mil)	(nul) 10345 (nul) 7505 (nul)	double precision	(Hult) 9349 (Hult) 7505 (Hult) 3452	0101000020EB6- 0101000020EB6- 0101000020EB6- 0101000020EB6- 0101000020EB6-
batalog_ge     batalog_stndf     bit heating_stndf     it measurements     it measurements     it measuref     ity Trager Functions     to Trave     vito trager Functions     vito trager functions     it measure(7)     if upsubg_station_result     if mist_peon	sber Rimedia I Padeta I Datbru Sustemi	filmitamge.cm double precision	arrgfobfuorge,cm     double precision     full     full     full     full     full     full	bind Burd Burd Burd Burd Burd Burd Burd	vibile precision	double precision  full  f	(be) (be) (be) (be) (be) (be)	Souther previous	2000 (0000 (0000)) (000)	(nul) 30345 (nul) 7505 (nul) 3455	double precision	(nul) 9349 (nul) 7505 (nul) 3452 3100	0101000020E86 0101000020E86 0101000020E86 0101000020E86 0101000020E86

The "messstelle" table has been enhanced with an additional column called "geom," which contains the geometry information representing the location of each station.

#### Merge two tables:

In this section, we aim to merge the "messwert" and "messstelle" tables based on the common column, "messstelle\_id." To achieve this, we will select the desired columns from each table and then perform the merge based on the "messstelle\_id" column.

```
select t1."messstelle_id", t1."name", t1.geom, t2."stoff_nr",
t2."messergebnis_c", t2."masseinheit",
t2."datum_pn", t2."messergebnis_cm" from hygrisc.messstelle t1 ,
hygrisc.nitrat t2
where t1."messstelle_id" = t2."messstelle_id";
```

	Q, Dastooard Propert	we SQL Statebox Dep	ondersten Dependent	🖀 at mas, i at wass (bat mas, ii			
* @puble		E Q - # - &	8 B'- T -	10100 - 8 P		5.5 4-1	A 18-
··· @ sma	9 data bezaget	111-2					
<ul> <li>El Collatione</li> </ul>	Query Editor Query	and the second					Scortch Past
<ul> <li>Sg Dorwinn</li> <li>Di FTS Configurations</li> </ul>							
F By FTS Determines		waartelle_fd", t1."nee ". t2."wessergebrit.co				seame to be 15",	
5 da FTS Painers		mantalls_Td" = t2,"man		form at a purchase	100		
<ul> <li>FTS Temphone</li> </ul>	and the second sec						
<ul> <li>El Fronkige Tables</li> </ul>							
k bis Paradiana							
b Distriction of the second							
F E Procestarea							
<ul> <li>t.idequerces</li> </ul>							
+ CTables (S)	1						
> 25 ge_stations							
# Ittl: Katalog, ge							
* (***********************************	Data Gutant Explain	<ul> <li>Messages - Notifications</li> </ul>					
* Illineessiensetts	and the second s	Messages Notifications			1100000000	-	
	Data Output Explore messatalis.or	· · · · · · · · · · · · · · · · · · ·		iptetur e massaintet.	e terrar a	nassangadaria.com tact	
<ul> <li>ITTressurvements</li> <li>Ittressussible</li> </ul>	associate of	· · · · · · · · · · · · · · · · · · ·	a the second	rijesteritusi Linusiasian 🌢 Maamaalaskad. Linus kusi kusi kusi kusi kusi kusi kusi ku	<ul> <li>detersupri ( sate 1800/0522</li> </ul>	nanongebrik, Jan Ind	•
<ul> <li>Internationality</li> <li>Internationality</li> <li>Internationality</li> <li>Internationality</li> </ul>	a tapet 1 2000	A test & geometry A			1000	1948	•
* 四1111000000000 * 四1111000000000 * 四1110000000000000000000000000000000000	1 2000 2 603	A test A geometry A		100.248 (mp)	1800-09-22		•
+ () researcements + () researce + () response + () regime Facultions + () regime Facultions + () regime () result + () regime ()	1 2000 2 603 5 603 5 603	A NUMB A SHORE A CONTRACTOR AND A CONTRA		100.245 reg/l 42.0809 reg/l	1800-09-22 1800-09-23		•
(1) These versions     (1) These versions     (1) These versions     (1) These versions     (1) Types     (1) Verse (1)	**************************************	August - Googeney -     Control Booleaney     Control Booleaney     Control Booleaney     Control Booleaney     Control Booleaney     Control Booleaney		100.245 regit 40.0805 regit 31.0005 regit	1800-09-21 1800-09-21 1800-09-80 1894-09-10		•
+ II) measurements + III) measurements + III: measurement + III: Tragger Functione + III: Tragger Functione + III: Tragger - III: Where (T) - III: Wh	2000 C C C C C C C C C C C C C C C C C C	Lass	Hot Curr         Hot Curr         Hot Curr           HIL         1344         Statil           HIL         1344         Hot Curr           HIL         1344         Hot Curr           HIL         1344         Hot Curr           HIL         1344         Hot Curr	100.240 regit 42.0000 regit 20.0000 regit 20.000 regit	1800-05-22 1800-05-23 1800-05-38 1804-05-01 1804-02-04		•
P (Traperusments     P) Et resolution     P) Et resolution     P) Et resolution     P) Traper     V(Wens (T)     P) Et resolution     P) Traper     V(Wens (T)     P) Et resolution, result     P) Et resolution, result     P) Et resolution, result     P) Et resolution     P) Et resolution	mesodali, H           1         3000           2         803           8         803           3         903           5         903	A manual a generation of the second sec	Hold, or support         Annotation strain         Holds strain           442.         12.84         12.84           442.         12.84         12.84           443.         12.84         12.84           443.         12.84         12.84	100.243 (mg/) 40.0000 (mg/) 20.0001 (mg/) 20.17 (mg/) 40.17 (mg/)	1800-09-22 1800-09-23 1800-09-38 1800-02-02 1900-02-02		•
If measurements     If measurements     Encodeding	**************************************	A 1000 A 2000 A 20	HAVE TO SUPPORT         HOWE TO SUPPORT           NO.         1244	100.245 mg/l 40.060 mg/l 38.0755 mg/l 44.27 mg/l 44.27 mg/l	1903-09-22 1902-09-38 1903-07-19 1903-07-15 1903-07-15	84 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	
P (Trequersands     B) tressible     P (Treque families)     P (Treque families)     P (Treque families)     P (Treps     P (Trep	messatali, M           3         30/4           1         2000           2         001           3         000           5         003           5         003           6         001           7         2000           8         011	test	HOLE         Table           Bayer         -         Passe           ALL         1344         All           ALL         1344         All	100.245 mg/ 40.0605 mg/ 20.7005 mg/ 40.77 mg/ 40.77 mg/ 40.7546 mg/ 30.5214 mg/	1860-0932 1860-0932 1860-0942 1860-0944 1860-0945 1860-0915	84 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	Car. Total query rantition: 1 sects 480 more: 73899 issue affect

In order to have the above SQL command available as a new view for the subsequent section in QGIS, we should store it accordingly.

```
create view hygrisc.nitrat_geom as (select t1."messstelle_id", t1."name",
t1.geom, t2."stoff_nr", t2."messergebnis_c", t2."masseinheit",
t2."datum_pn", t2."messergebnis_cm" from hygrisc.messstelle t1 ,
hygrisc.nitrat t2
where t1."messstelle_id" = t2."messstelle_id")
```

# 2.5 **QGIS**

QGIS is a free and open-source geographic information system (GIS) software. It provides a wide range of tools and functionalities for visualizing, analyzing, and managing geospatial data. QGIS supports various data formats and allows users to create, edit, and publish maps.

You can download QGIS for free from the below link.

#### https://qgis.org/en/site/

The below video shows how to download and install QGIS for Windows which is highly recommended to watch before installing it.



To gain a better understanding of QGIS, I recommend watching the following video, which provides valuable insights and guidance on using the software.




**Create a time series video:** In this section, our objective is to generate a time series video depicting the changes in nitrate concentration over time in North Rhine-Westphalia, the most populous state in Germany. To begin, we must download the shapefile for North Rhine-Westphalia and import it into QGIS for further analysis and visualization.

Three below shapefiles need to be downloaded

- entire state shapefile (dvg1bld\_nw.shp)
- kreis shapefile (dvg1krs\_nw.shp)
- Gemeinde shapefile (dvg1gem\_nw.shp)

All three shapefiles can be downloaded from here. After downloading the shapefiles, we can proceed to load them into QGIS for visualization and analysis. The below video shows how to load the shapefile in QGIS.



Now we can see the map of NRW, kreis and Gemeinde. There are two options to create a video for time series.

**Locally with shapefile:** In here, we need to have a shapefile that consists of the nitrate concentration over time. download the notebook from here and run the Python codes to create two shapefiles. then we should load these two shapefiles to the QGIS. The first shapefile consists of all stations in NRW and the second one consists of the nitrate concentration.

The below video shows how we can load shapefiles to QGIS.



**Connect to Database:** The below video shows how we can connect our QGIS to Database and load the file from Database.



# **3 Dashboard**

In this section, the process of creating an interactive dashboard for our data will be explored. An interactive dashboard is a versatile tool that allows data to be interacted with, analyzed, visualized, and key information to be monitored by users.

This section discusses two approaches to creating a dashboard. The objective of this dashboard is to provide a user-friendly and interactive interface for data exploration and visualization, accessible even to non-programmers. Such a dashboard plays a crucial role in enhancing data comprehension and is widely utilized by managers and decision-makers to facilitate informed decision-making processes.

One notable example of this type of dashboard is the Covid-19 dashboard, which has gained widespread usage worldwide, including in Germany. The Covid-19 dashboard provides users with valuable insights into the number of new cases and deaths reported over various time periods. It helps individuals track the progression of the pandemic and understand the impact it has had on different regions and countries.

In our specific case, the objective is to develop a straightforward dashboard that showcases the map of North Rhine-Westphalia (NRW) alongside the concentration rates of Nitrate and Sulfate at different time intervals. This dashboard will provide a visual representation of the spatial distribution of these pollutants and enable users to observe any temporal variations in their concentrations within NRW.

### **Plotly Dash:**

**Plotly:** Plotly is a computing company located in Montreal, Canada. They develop online data analytics and visualization tools. Plotly offers online graphing, analytics, and statistics tools for their users, as well as scientific graphing libraries for Python, R, MATLAB, Perl, Julia, Arduino, and REST. Plotly offers several open-source and enterprise products such as Dash which have been used for creating simple and interactive dashboards in this project.

**Dash:** Dash is a framework to build data apps rapidly not only in Python but also in R, Julia, and F#. According to Plotly's official website, Dash is downloaded 800,000 times per month which shows that nowadays Dash getting more popular. Dash is a great framework for anyone who uses data with a customised user interface. Through a couple of simple patterns, Dash eliminated all of the technologies as well as protocols that are needed to make a full-stack web app with interactive data considerations. Another good feature is that Dash is running on web browsers so it means that no other application needs to run it.


To learn more about creating a dashboard with Plotly Dash, you can follow the link provided below. This resource contains comprehensive tutorials that guide you through the process of building a simple dashboard using Plotly Dash. These tutorials will provide you with step-by-step instructions and examples to help you create interactive and visually appealing dashboards using Plotly Dash.

### https://www.youtube.com/c/CharmingData

Dash is also offering some dashboards examples which could be really nice and helpful to get ideas. | Click here for Dash gallery

All the source codes of the dash gallery are available in | here

**Dashboard Design:** I have developed a web application dashboard that effectively visualizes time series data for Nitrate and Sulfate. The image below shows the main page of our dashboard.

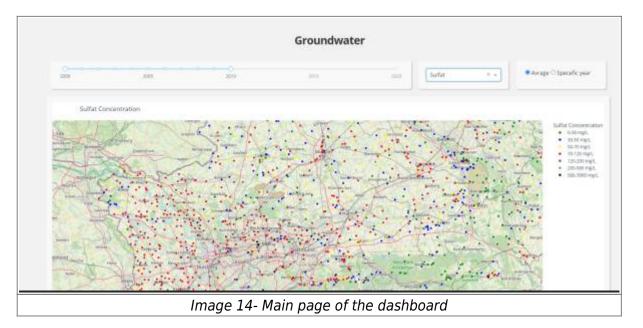

In order to run the above dashboard on your local system, you need to do the following:

### Click here and pull the repository

direct to the "dashboard" folder, then all the Python codes, and SQL queries are available to run the application.

There is a yml file inside the folder which name is "dashboard\_environment". This yml file will create an environment with all the necessary packages which you will need to run the application. The first step needs to load this file to the Anaconda, if you are not sure how to do that please refer to the 2.3.3 Anaconda section.


The next step is to add the credentials (Username, DB name, password and ...) of the database to the "credential\_temp" file.

And the last step is to run the "app.py" inside the new environment that you have already created with the help of "dashboard\_environment.yml"

# 4. Result


### Nitrate concentration 2000-2010

The video below shows the concentration of nitrate in North Rhine-Westphalia (NRW) from 2000 to 2010. This visualization was created using QGIS 3.16. By watching the video, you can observe the temporal changes in nitrate levels across NRW during the specified time period.

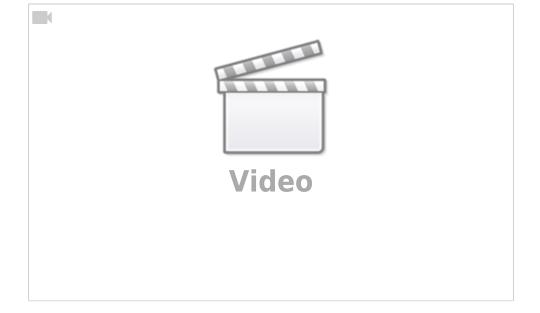


### Nitrate concentration 2010-2020

The video below shows the concentration of nitrate in NRW from 2010 to 2020. The video was created with QGIS 3.16

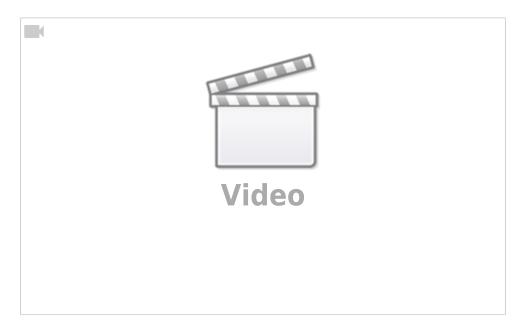


### Sulfat concentration 2000-2010

The video below shows the concentration of sulfate in NRW from 2000 to 2010. The video was created with QGIS 3.16

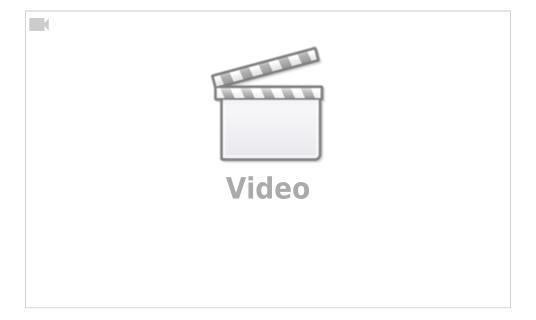

### Sulfat concentration 2010-2020

The video below shows the concentration of sulfate in NRW from 2010 to 2020. The video is created with QGIS 3.16

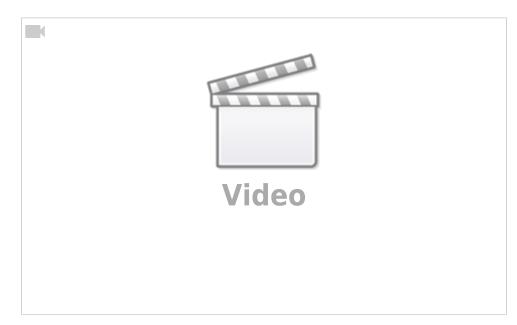

### 5. Project codes

All the codes are available in the below link.

Click here for project codes

### **Weitere Infos**

• EOLab-Wiki-Seiten zum Thema Grundwasserdaten in NRW

From: https://wiki.eolab.de/ - HSRW EOLab Wiki

Permanent link: https://wiki.eolab.de/doku.php?id=eolab:openhype:start&rev=1688022839



Last update: 2023/06/29 09:13