


Trough Automation PCB

Quick Info

- Wifi 2,4Ghz
- Tasmota
- DC Input 4.75V - 36V
- Nano Fuse (1A - 5A)
- Switching High Current / Voltage DC Devices (example: Valves, Motors, ...)
- Solder Pads for OneWire device (example: DS18B20 Temperature Sensor)
- Solder Pads for Button / Switch
- Space for additional modifications

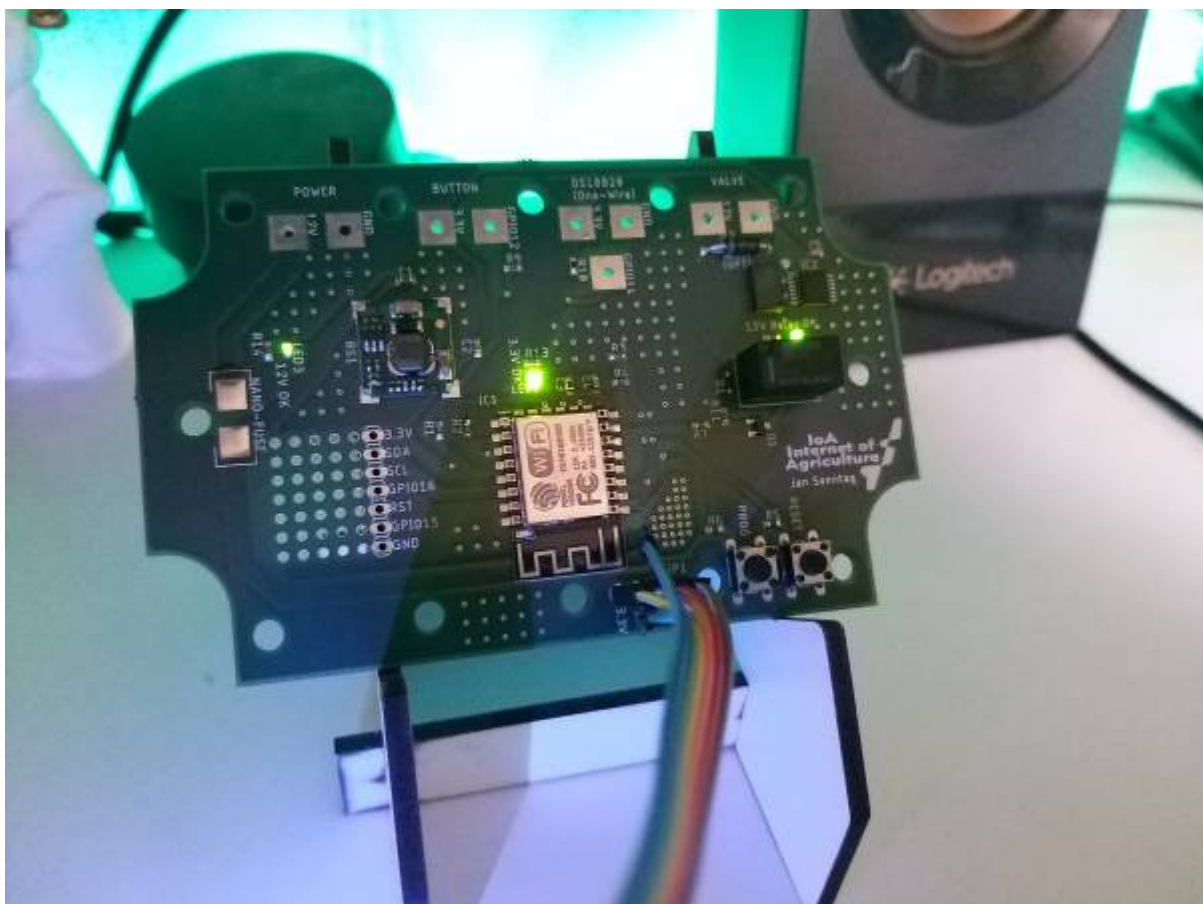

Example Application - Trough Automation

General Concept

How to program

Other possibilities

Last update:
2022/03/07
10:43

eolab:ioa:trough_automation:start https://wiki.eolab.de/doku.php?id=eolab:ioa:trough_automation:start&rev=1646646189

From:

<https://wiki.eolab.de/> - **HSRW EOLab Wiki**

Permanent link:

https://wiki.eolab.de/doku.php?id=eolab:ioa:trough_automation:start&rev=1646646189

Last update: **2022/03/07 10:43**

